



CUYAMA BASIN GROUNDWATER SUSTAINABILITY AGENCY BOARD OF DIRECTORS

Board of Directors

Derek Yurosek Chairperson, Cuyama Basin Water District
Lynn Compton Vice Chairperson, County of San Luis Obispo
Das Williams Santa Barbara County Water Agency
Cory Bantilan Santa Barbara County Water Agency
Glenn Shephard County of Ventura
Zack Scrivner County of Kern

Paul Chounet Cuyama Community Services District
George Cappello Cuyama Basin Water District
Byron Albano Cuyama Basin Water District
Jane Wooster Cuyama Basin Water District
Tom Bracken Cuyama Basin Water District

AGENDA

February 6, 2019

Agenda for a meeting of the Cuyama Basin Groundwater Sustainability Agency Board of Directors to be held on Wednesday, February 6, 2019 at 4:00 PM, at the Cuyama Valley Family Resource Center, 4689 CA-166, New Cuyama, CA 93254. To hear the session live call (888) 222-0475, code: 6375195#.

The order in which agenda items are discussed may be changed to accommodate scheduling or other needs of the Board or Committee, the public, or meeting participants. Members of the public are encouraged to arrive at the commencement of the meeting to ensure that they are present for discussion of all items in which they are interested.

In compliance with the Americans with Disabilities Act, if you need disability-related modifications or accommodations, including auxiliary aids or services, to participate in this meeting, please contact Taylor Blakslee at (661) 477-3385 by 4:00 p.m. on the Friday prior to this meeting. Agenda backup information and any public records provided to the Board after the posting of the agenda for this meeting will be available for public review at 4689 CA-166, New Cuyama, CA 93254. The Cuyama Basin Groundwater Sustainability Agency reserves the right to limit each speaker to three (3) minutes per subject or topic.

1. Call to Order
2. Roll Call
3. Pledge of Allegiance
4. Approval of Minutes
 - a. January 9, 2019
5. Report of the Standing Advisory Committee
6. Technical Forum Update
7. Groundwater Sustainability Plan
 - a. Groundwater Sustainability Plan Update
 - i. Water Budget Update
 - ii. Preliminary Discussion on Project and Management Actions
 - iii. Presentation on Groundwater Dependent Ecosystems

- b. Monitoring Networks Adoption
 - c. Data Management Adoption
 - d. Stakeholder Engagement Update
8. Groundwater Sustainability Agency
- a. Report of the Executive Director
 - b. Progress & Next Steps
 - c. Report of the General Counsel
 - i. Election of Officers
9. Financial Report
- a. Financial Management Overview
 - b. Financial Report
 - c. Annual Insurance Coverage
 - d. Annual Audit
 - e. Payment of Bills
10. Reports of the Ad Hoc Committees
11. Directors' Forum
12. Public comment for items not on the Agenda

At this time, the public may address the Board on any item not appearing on the agenda that is within the subject matter jurisdiction of the Board. Persons wishing to address the Board should fill out a comment card and submit it to the Board Chair prior to the meeting.

13. Adjourn

Cuyama Basin Groundwater Sustainability Agency Board of Directors Meeting

January 9, 2019

Draft Meeting Minutes

Cuyama Valley Family Resource Center, 4689 CA-166, New Cuyama, CA 93254

PRESENT:

Yurosek, Derek – Chair
Compton, Lynn – Vice Chair
Albano, Byron
Bantilan, Cory
Bracken, Tom
Cappello, George
Chounet, Paul
Christensen, Alan – *Alternate for Zack Scrivner*
Shephard, Glenn
Wooster, Jane
Beck, Jim – Executive Director
Hughes, Joe – Legal Counsel

ABSENT:

Williams, Das

1. Call to order

Chair Derek Yurosek called the meeting to order at 4:01 p.m.

2. Roll call

Hallmark Group Project Coordinator Taylor Blakslee called roll (shown above) and informed Chair Yurosek that there was a quorum of the Board.

Chair Yurosek held a moment of silence in memory of the lives lost and effected by the Montecito mudslides.

3. Pledge of Allegiance

The pledge of allegiance was led by Chair Yurosek.

4. Approval of Minutes

a. December 3, 2018 (Regular Meeting) & December 18, 2018 (Special Meeting)

Chair Yurosek opened the floor for comments on the December 3, 2018 and Special December 18, 2018 meeting minutes of the Cuyama Basin Groundwater Sustainability Agency (CBGSA) Board of Directors.

MOTION

Director George Cappello made a motion to adopt the Regular December 3, 2018 and Special December 18, 2018 CBGSA Board meeting minutes. The motion was seconded by Director Glenn Shephard and passed.

AYES: Chair Yurosek, Vice Chair Lynn Compton, Directors Byron Albano, Cory Bantilan, Tom Bracken, Cappello, Paul Chounet, Shephard, Jane Wooster
 NOES: None
 ABSTAIN: None
 ABSENT: Director Williams

5. Report of the Standing Advisory Committee

CBGSA Standing Advisory Committee (SAC) Vice Chair Brenton Kelly provided a verbal report on the January 8, 2019 SAC meeting.

He thanked Chair Yurosek for the moment of silence in response to the lives lost to the 2018 Montecito mudslides and hopes the memorial events held in Santa Barbara County bring peace to those involved. He hopes this event provides an example of what can happen when a community comes together to solve regional challenges.

SAC Vice Chair Kelly said he would inform the Board on the SAC's decisions when they get to those items during the meeting.

6. Technical Forum Update

Woodard & Curran Project Manager Brian Van Lienden provided an overview of the December 14, 2018 technical forum meeting and is summarized in the Board packet.

7. Groundwater Sustainability Plan**a. Groundwater Sustainability Plan Update**

Mr. Van Lienden provided an update on GSP activities and an overview of their accomplishments for the month of November 2018 which are included in the Board packet.

Mr. Van Lienden briefed the group on two potential options for the GSP document schedule which would determine the release sequence for the remaining chapters/sections. Option 1 would allow a round of review for each section and then a final review as part of the public draft; however, this option would push the adoption process of the public draft back a month and Board decisions would need to be set at a more aggressive pace. Option 2 would keep the current schedule with the public draft release but does not allow an initial review of the remaining sections prior to being released in the public draft.

Chair Yurosek asked what staff's recommendation was, and Mr. Van Lienden said Option 2 is the preferred option because the discussion and decisions from the SAC and Board would occur sooner, which allows the public draft to be released earlier, and places less stress on the budget.

Chair Yurosek asked SAC Vice Chair Kelly the SAC's poll results, and Mr. Kelly reported 1 SAC member voted for Option 1 (schedule pushed back and more review) and 6 SAC members voted

for Option 2 (current schedule). Chair Yurosek asked for comments from the Board. Director Albano said he agreed with staff’s recommendation for Option 2. Vice Chair Compton said she preferred Option 1 because it allows for one full month of review and provided additional review time for County staff.

Alternate Director Alan Christensen arrived at 4:12 pm

Directors Cappello, Bantilan, Bracken, and Christensen said they prefer Option 2. Director Shephard said he preferred Option 2 and commented that there could always be a month of additional review time added if needed for County staff review on the back side.

Director Chounet asked if, after comments and responses to the draft are submitted, there will be a review period prior to the final GSP being submitted. Mr. Van Lienden said W&C will address the comments and responses made and will adjust the GSP as needed. Vice Chair Compton said she did not receive the Board packet until yesterday. Staff informed the group that the packet was distributed on Friday, January 4, 2019. Chair Yurosek said he is comfortable with Option 2 and does not want to delay the public draft by a month.

Landowner Sue Blackshear said she is concerned with the possibility of there being inadequate time to review the comments and responses made to the public draft.

SAC Vice Chair Kelly said he favored Option 1 because it allows for more time for the Project and Management chapter. Mr. Van Lienden commented that staff plans on having most of the substantive discussions related to this chapter with the SAC and Board prior to the draft chapter.

MOTION

Director Albano made a motion to approve option 2 for the GSP document schedule. The motion was seconded by Director Bantilan and passed.

- AYES: Directors Albano, Bantilan, Bracken, Cappello, Christensen, Shephard, Wooster and Yurosek
- NOES: Directors Chounet and Compton
- ABSTAIN: None
- ABSENT: Director Williams

Mr. Van Lienden discussed the second schedule issue being the two options for addressing the release of placeholders. Option 1 is to issue the GSP chapters/sections at the time of the GSP public draft release. Option 2 is to issue the newly developed subsections as a single package in March with a 1-week review and comment period. However, there will be discussions regarding the subsections at the SAC and Board meetings prior to the document sections being released for review.

SAC Vice Chair Kelly reported that three (3) SAC members voted for Option 1 and four (4) SAC members voted for Option 2.

Chair Yurosek asked if there is a staff recommendation and Mr. Van Lienden said Option 1 is more favorable because of the slight budget increase attributed to Option 2.

Chair Yurosek opened up for comments from the Board.

Director Chounet said he preferred Option 2 because it provides a fuller picture of the chapters.

Chair Yurosek, Vice Chair Compton, Directors Albano, Bantilan, Shephard, Christensen and Bracken said they prefer Option 2.

Director Wooster asked what the placeholder subsections are and what their current statuses are. Mr. Van Lienden said a number of these GSP sections are reliant on model results. For the Groundwater Dependent Ecosystem placeholders, he reported that a biologist has done a field study in Cuyama and provided W&C with a technical memo that they are reviewing. Director Wooster said she preferred Option 2 and is a little concerned that they have not seen any information on these important subsections.

Director Christensen asked what the benefits are with Option 1. Mr. Van Lienden said Option 1 causes less staff and time and consequently provides some cost savings.

Mr. Van Lienden clarified that the Board will see the information that feeds these placeholders separately from the packet.

Director Bantilan asked what the SAC discussion regarding approval of Option 1 and SAC Vice Chair Kelly said they hinged on staff's comments about budget implications.

SAC Committee Members Brad DeBranch and Joe Haslett commented that they voted for Option 1 based on the budget aspect.

MOTION

Director Chounet made a motion to approve Option 2 for the release of GSP subsections. The motion was seconded by Vice Chair Compton and passed.

- AYES: Directors Albano, Bantilan, Bracken, Chounet, Christensen, Compton, Shephard, Wooster and Yurosek
- NOES: Director Cappello
- ABSTAIN: None
- ABSENT: Director Williams

b. Groundwater Conditions Chapter Adoption

Mr. Van Lienden provided an overview of Groundwater Conditions chapter. Mr. Van Lienden said he has talked with Santa Barbara County Water Agency (SBCWA) and San Luis Obispo (SLO) County staff regarding their comments and responses to the Chapter and recommends tabling this item until the next Board meeting to allow possible revision of the Chapter.

CBGSA Executive Director Jim Beck reported that W&C had said pushing the adoption of the Chapter back a month does not impact the schedule.

SAC Vice Chair Kelly reported that at the SAC meeting, Mr. Beck read a comment by SAC Chair Robbie Jaffe that indicated several issues with the Groundwater Conditions chapter. Additionally, he said he read his personal comments regarding the Chapter that included a request for a redline strikeout review and addressed the insufficient handling of the data gap.

Directors Shephard and Christensen said they would like to move forward with the adoption of the Chapter and pointed out there will be additional review time to review placeholders once included in the placeholder package to be released in March 2019.

Director Bantilan and Bracken said they would like to delay approving the Chapter.

Chair Yurosek asked what content in the Chapter will change by next month’s meeting and how can this information affect the Board’s decision. Mr. Van Lienden replied that some corrections and updates will be made throughout the Chapter, however the Board can adopt the Chapter now and the changes will be made to the public draft in April.

Chair Yurosek commented that he feels the Board has been pushing this down the road and asked if the Board would care to make a motion for adoption.

MOTION

Director Wooster made a motion to approve the Groundwater Conditions chapter and to direct Woodard & Curran to coordinate with Santa Barbara County Water Agency and San Luis Obispo County on their chapter comments. The motion was seconded by Vice Chair Compton.

SAC Vice Chair Kelly said his main concern with the Groundwater Conditions chapter is that it does not contain groundwater quality information from the Cuyama Community Services District (CCSD).

MOTION

Director Wooster amended her motion to approve the Groundwater Conditions Section and to direct Woodard & Curran to coordinate with Santa Barbara County Water Agency and San Luis Obispo County on their chapter comments, and to coordinate with the Cuyama Community Services District to include water quality data. The motion was seconded by Vice Chair Compton and passed by a supermajority vote of 88.89% (a 75% approval is need for a supermajority vote).

- AYES: Directors Albano, Bantilan, Bracken, Cappello, Chounet, Christensen, Compton, Shephard, Wooster and Yurosek
- NOES: None
- ABSTAIN: None
- ABSENT: Director Williams

c. Adoption of Threshold Numbers for Representative Wells

Mr. Van Lienden provided an overview of the action the Board took in directing W&C to apply threshold rationales to representative wells. He reported that W&C received comments to add additional representative wells and increased the number of wells from 49 to 65. Additionally, he discussed how to interpret the table and hydrograph results.

Mr. Beck provided an introduction of the threshold numbers to assist in guiding the discussion. He said the question the Board needs to address is if W&C accurately applied the rationale to the thresholds, however they are not discussing the Board-approved rationales themselves.

W&C said in applying the thresholds, they discovered five (5) representative wells that were not suitable for calculating the measure of operational flexibility using the Board-approved threshold rationale. Additionally, two wells were removed (Opti well nos. 119 and 121). Director Wooster recommended removing Opti well nos. 115 and 602 since the depth of well no. 115 had not been established and well no. 602's casing had collapsed and was not in use.

Furthermore, Mr. Van Lienden recommended using the western region threshold rationale for seven (7) wells in the northwestern region that fit better with that rationale.

Director Chounet said he does not have any issues with the numbers.

Director Albano asked why W&C expanded all wells as representative wells. Mr. Van Lienden said they had received numerous requests and comments to do this and added all monitoring wells as representative wells in spatially non-dense monitoring well areas.

Director Albano asked who instructed W&C to do this. He said he spent a lot of time reviewing and analyzing the threshold number implications in his area, but he is not comfortable with adding all these new wells. Mr. Van Lienden said the wells are not actually monitoring wells until they are approved by the appropriate landowner.

Director Albano said adding more wells in his area via the process that occurred was not approved and he feels like this decision was made behind the scenes. He said we need to adjust the right representative wells, and with the newly added wells, we may have wells that are not appropriate. He asked if W&C is going to keep his well as a monitoring well or drop one of the five wells in the future. W&C reported that they would keep his well as a monitoring well.

Mr. Beck reminded the Board that the plan can be updated every 5 years, however it can also be adjusted more frequently.

Vice Chair Compton asked if adjustments will require a supermajority vote and Mr. Beck confirmed that they would. She asked why a vote was not taken prior to adding additional monitoring wells.

Mr. Van Lienden reported that well nos. 830-836 have the western region rationale applied to them and Vice Chair Compton said that solved their concerns.

Director Bantilan said on well nos. 72 and 74 it may be artificially lowering the minimum threshold due to a spike in the data. W&C Senior Hydrogeologist John Ayres said this may require data validation due to data abnormalities.

Directors Shephard, Bracken, and Christensen said they had no comments.

Chair Yurosek said overall, with the changes made, he would go with the SAC's recommendation

of approval.

Vice Chair Compton asked if we are creating a new region with the rationale change to the seven wells in the northwestern region. Mr. Van Lienden said no, they are only applying a separate rationale to specifically those seven (7) wells.

MOTION

A motion was made by Director Cappello and seconded by Vice Chair Compton to Approve the applied thresholds, apply the western region rationale to Opti well nos. 830-836, and remove Opti well nos. 115, 119, 121, and 602. The motion passed unanimously.

AYES:	Directors Albano, Bantilan, Bracken, Cappello, Chounet, Christensen, Compton, Shephard, Wooster and Yurosek
NOES:	None
ABSTAIN:	None
ABESENT:	Director Williams

SAC Vice Chair Kelly mentioned that the SAC reached consensus to review threshold numbers in the first year and implement changes in the second year. Mr. Beck said no Board action is needed on this issue, but they will revisit this topic during the implementation chapter.

d. Stakeholder Engagement Update

Catalyst's Principle Charles Gardiner provided an update on stakeholder engagement activity and is included in the Board packet.

8. Groundwater Sustainability Agency

a. Report of the Executive Director

Nothing to report.

b. Progress & Next Steps

Mr. Beck provided an update on the near-term GSP schedule and accomplishments and next steps, which are summarized in the Board packet.

Mr. Blakslee gave an update on the grant reimbursement process.

c. Report of the General Counsel

Legal Counsel Joe Hughes addressed the Board regarding Brown Act and SGMA issues arising from CBGSA Board members, SAC members, and Cuyama Water District Board members attending the meetings of one another. An important conclusion was that CBGSA Board members may attend SAC meetings, but should not advocate to the SAC regarding the advice and input the SAC gives to the CBGSA Board.

Director Wooster commented that as a Director she cannot give her opinion at the SAC since that can be considered advocacy.

Vice Chair Compton said she has to recuse herself from certain decisions on SLO issues but

asked how certain Cuyama residents with property affected by Sustainable Groundwater Management Act (SGMA) do not have to recuse themselves. Mr. Hughes said it is a political reform issue, but there are exceptions, and these are determined on a case by case basis.

Director Shephard asked Mr. Hughes to clarify that a majority is defined by bodies, not the voting percentages and Mr. Hughes confirmed that is true.

Cuyama Valley Family Resource Center Executive Director Lynn Carlisle said sometimes a quorum will attend the SAC meeting, but one person will remain silent. Mr. Hughes said the observer rule does not come into play with Water District Board Directors.

SAC Vice Chair Kelly expressed thankfulness to Mr. Hughes for working this issue out.

Mr. Hughes reported that officer elections will occur at next month's Board meeting.

9. Financial Report

a. Financial Management Overview

Mr. Blakslee provided an overview of the CBGSA's financial activities. He reported that, as of November 30, 2018, total outstanding invoices totaled \$947,153.00.

b. Financial Report

Mr. Blakslee provided an overview of the November 2018 financial report and is included in the Board packet.

c. Payment of Bills

Mr. Blakslee reported on the payment of bills for the month of November 2018.

MOTION

A motion was made by Director Bracken and seconded by Vice Chair Compton to approve payment of the bills through the month of November 2018 in the amount of \$167,518.06, pending receipt of funds. The motion passed unanimously.

AYES:	Directors Albano, Bantilan, Bracken, Cappello, Chounet, Christensen, Compton, Shephard, Wooster and Yurosek
NOES:	None
ABSTAIN:	None
ABESENT:	Director Williams

10. Reports of the Ad Hoc Committees

Nothing to report.

11. Directors' Forum

Nothing to report.

12. Public comment for items not on the Agenda

SAC Committee member Louise Draucker reported that she was asked several times if the Board meetings can occur later in the day. Chair Yurosek commented that he appreciates that sentiment, but a number of Board members have travel impediments but is sensitive to this issue.

13. Adjourn

Chair Yurosek adjourned the CBGSA Board at 5:59 p.m.

I, Jim Beck, Executive Director to the Cuyama Basin Groundwater Sustainability Agency Board of Directors, do hereby certify that the foregoing is a fair statement of the proceedings of the meeting held on Wednesday, January 9, 2019, by the Cuyama Basin Groundwater Sustainability Agency Board of Directors.

Jim Beck
Dated: February 6, 2019

DRAFT



TO: Board of Directors
Agenda Item No. 5

FROM: Roberta Jaffe, Standing Advisory Committee Chair

DATE: February 6, 2019

SUBJECT: Report of the Standing Advisory Committee

Issue

Report on the Standing Advisory Committee meeting.

Recommended Motion

None – information only.

Discussion

Provided as Attachment 1 is a report on the January 31, 2019 Standing Advisory Committee (SAC) from SAC Chair Roberta Jaffe and Vice Chair Brenton Kelly.

The purpose of this report is to provide the Cuyama Basin Groundwater Sustainability Agency Board of Directors with SAC input on the various Groundwater Sustainability Plan (GSP) components and issues that will better equip the Board when making decisions on GSP-related issues.

Standing Advisory Committee Report

Meeting: January 31, 2019

Submitted to the GSA Board February 4, 2019

By Roberta Jaffe, SAC Chair

Brenton Kelly SAC Vice-Chair

The SAC maintained a quorum of 5 until approximate 6:00 PM; 4 members were absent. All agenda items that required recommendations to the Board were conducted while a quorum was present. There were approximately 12 people in the audience including 1 Cuyama Basin Water District (CBWD) Director who also serves as a GSA Board Member. The meeting lasted 3.5 hours.

There were 4 main areas of discussion:

1. Water budget update
2. Discussion of Project and Management Actions
3. Groundwater Dependent Ecosystem (GDE) Report
4. Final review of 2 chapters: Monitoring Networks and Data Management Systems

1) Water Budget Update:

Woodard and Curran presented an updated water budget using the model to project 50 years into the future. Projections were based on replicated precipitation patterns and crop plantings. Climate change was not incorporated into this version. The slides showed 2 key outcomes:

1. If pumping continues as is with no interventions, the model shows a continued downward slope and a -26,000 AFY overdraft for the Basin.
2. -25,000 AFY is attributed to pumping in the Central Region.

Discussion and Questions:

- Each region has different issues and concerns and needs to be managed accordingly
- Overdraft in Central Region is in agricultural area, not in township area
- There is not enough data in NW and Western Region to make projections at this point
- There is continued concern about how to address Eastern Region including wells starting below minimum thresholds and well depth.

2) Discussion of Project and Management Actions

After a presentation and recommendations by Woodard & Curran, the SAC makes the following recommendations to the GSA Board:

Project	W&C Recommendation	SAC Recommendation
New Pumping Well in the CCSD and Ventucopa Areas	Yes	Yes
Flood & Stormwater Capture	More analysis	Yes
Municipal Area Rainwater Capture	No	Mixed. Possible add this under a new project category titled "Ensure Reliable Water Supply for Domestic Areas" to include: Conservation Strategy, New Wells, Rainwater Capture, and others.

Rangeland and Forest Management	No	Future study list
Water Supply Imports via Pipeline	No	No
Water Supply Imports via Exchange	Future study list	Future study list
Precipitation Enhancement	Yes	2 – No (Louise, Mike) 1 – Yes (Brenton) 2 – More study (Robbie and Letty)

The domestic well for the old townsite of Cuyama was mentioned and the question of whether its challenges were considered. W&C was not aware of these challenges. Conservation measures by domestic users was mentioned as an important outreach component. Conservation by agriculture was assumed to be proactive.

In addition different approaches to water allocation were discussed with some initial discussion related to the possibility of different allocations for different management areas and questions were asked to how all of this would be financed.

3) Groundwater Dependent Ecosystem (GDE) Report

The DWR has adopted The Nature Conservancy's GDE mapping. In the Cuyama Basin they've identified 2700 acres of potential GDE's. Woodard and Curran had a field biologist spend 1.5 days in the Basin to verify the GDE's.

Discussion and Questions:

- The SAC would like clarity on what DWR requires related to GDE management.
- Access to the field biologist report was requested.
- What were the criteria the field biologist used for eliminating 4/5th of the GDE's?
- How were seeps and springs accounted for?
- How could a water depth of below 40 feet be assumed over such an extended area when there are multiple faults and canyons which could bring water to the surface for GDE's?
- Planned installation of piezometers was explained and appreciated.

4) Final review of 2 chapters: Monitoring Networks and Data Management Systems

Both chapters were approved unanimously without discussion.

Summary:

GSP planning entered an important phase with the water budget and projections 50 years forward being analyzed using the recently adopted minimum thresholds for each region. Continued overdrafting of the Basin with a focus on the Central Region was verified through the model if no interventions were to occur. It was also clear that looking at the Basin's 6 regions showed different needs for both management and water allocations for each region. Recommendations were made regarding the proposed management projects. More information was requested regarding GDEs and the SAC unanimously approved for recommendation to the GSA Board 2 chapters of the GSP: Monitoring Networks and Data Management.



TO: Board of Directors
Agenda Item No. 6

FROM: Lyndel Melton, Woodard & Curran

DATE: February 6, 2019

SUBJECT: Technical Forum Update

Issue

Update on the Technical Forum.

Recommended Motion

None – information only.

Discussion

At the request of Cuyama Valley landowners, Cuyama Basin Groundwater Sustainability Agency Groundwater Sustainability Plan (GSP) consultant Woodard & Curran (W&C) has been meeting monthly with technical consultants representing landowners to discuss W&C's approach and to provide input where appropriate.

A summary of the topics discussed at the January 25, 2019 technical forum meeting is provided as Attachment 1, and the next forum date is February 22, 2019.

MEETING MEMORANDUM

PROJECT: Cuyama Basin Groundwater Sustainability Plan Development

MEETING DATE:
1/25/2019

MEETING: Technical Forum Conference Call

ATTENDEES: Matt Young (Santa Barbara County Water Agency)
 Matt Scudato (Santa Barbara County Water Agency)
 Catherine Martin (San Luis Obispo County)
 Neil Currie (Cleath-Harris Geologists)
 John Fio (EKI)
 Jeff Shaw (EKI)
 Dave Leighton (EKI)
 Dennis Gibbs (Santa Barbara Pistachio Company)
 Brian Van Lienden (Woodard & Curran)
 Sercan Ceyhan (Woodard & Curran)
 Micah Eggleton (Woodard & Curran)
 John Ayres (Woodard & Curran)
 Ali Taghavi (Woodard & Curran)
 Sebastien Poore (Woodard & Curran)

1. AGENDA

- Numerical Model and Water Budget Update
- Projects and Management Actions
- Groundwater Dependent Ecosystems

2. DISCUSSION ITEMS

The following table summarizes comments raised during the conference call and the response and plan for resolution (if appropriate) identified for each item.

Item No.	Comment	Commenter	Response/Plan for Resolution
1	When will you release the model input and output files?	Jeff Shaw	Model files will be released subsequent to the release of the draft Water Budgets GSP section.
2	It may make sense to subdivide the Central Basin into developed and undeveloped areas. I can provide input on where it makes sense to draw a line.	Dennis Gibbs	Dennis can mark up the pdf map provided to the Tech Forum and send it back to us with his ideas.
3	The rationale for separating the two areas in CB for water budget accounting is not clear.	John Fio	Comment noted. This separation has not been included in material to be presented to the SAC and Board

4	There was discussion about potentially drawing a different line between the Northwest and Western boundaries for purposes of water budgets. The new boundary would better reflect geology in that part of the Basin.	Multiple	Technical Forum members responded that these changes could be reasonable, for purposes of discussing water budgets. However, we would need to be careful that we are still adequately reflecting the relationship between the regions and the threshold wells. The original boundary has been retained for the SAC/Board presentations.
5	What was the modeling assumption for pumping going forward?	Jeff Shaw	W&C took the 2017 land use conditions, and assumed a variable pattern going forward that approximated recent agricultural land use.
6	There are localized pumping depressions in the Ventucopa corridor.	Dennis Gibbs	Comment noted. This may need to be considered when looking at model performance in the Ventucopa region.
7	I can give you some ideas for good locations for monitoring wells in the Ventucopa area.	Dennis Gibbs	W&C will contact Dennis and others for ideas for where new wells can be added in the Category 1 task.
8	What is the largest avg annual decline in the Basin?	Dennis Gibbs	The largest decline in the Basin is about 10 feet/year.
9	Twitchell Reservoir has a sedimentation problem – the GSA should engage Twitchell operators when considering a potential stormwater capture project.	Dennis Gibbs	Comment noted. This should be considered if the GSA does a more detailed study during the implementation phase.
10	Controlled burning would be a hard sell. If you ran a burn on areas where there is a flat slope it could work, but it often doesn't go according to plan.	Jeff Shaw	Comment noted. The pros and cons of this option will need to be considered by the Board.
11	Through controlled prescription burning, you don't necessarily increase sedimentation. A program that runs appropriately will reduce ET and sediment won't necessarily go down the valley	Dennis Gibbs	Comment noted. The pros and cons of this option will need to be considered by the Board.
12	You should consider cloud seeding as a potential action. A study has been performed for this action in the Cuyama Basin.	Matt Scrudato	Matt will provide W&C with the study report. This action will be added to the SAC/Board presentation for consideration.
13	Materials developed for Paso Robles GSP development may be useful for Cuyama Basin discussions with the SAC/Board.	Cathy Martin	Cathy will provide W&C with the materials and these will be taken into consideration for future SAC/Board presentations.

14	It would be better to use example numbers rather than actual numbers when discussing the potential pumping allocation options.	Multiple	This change has been made to the SAC/Board presentations.
----	--	----------	---

Cuyama Basin Groundwater Sustainability Agency

Technical Forum Update

February 6, 2019



January 25th Technical Forum Discussion

- Water Budget Update
- Preliminary Discussion on Projects and Management actions
- Presentation on Groundwater Dependent Ecosystems
- Next Steps
- Next Meeting – Friday, February 22

Technical Forum Members

- Catherine Martin, San Luis Obispo County
- Matt Young, Santa Barbara County Water Agency
- Matt Scrudato, Santa Barbara County Water Agency
- Matt Klinchuch, Cuyama Basin Water District
- Jeff Shaw, EKI
- Anona Dutton, EKI
- John Fio, EKI
- Dennis Gibbs, Santa Barbara Pistachio Company
- Neil Currie, Cleath-Harris Geologists
- Matt Naftaly, Dudek



TO: Board of Directors
Agenda Item No. 7a

FROM: Lyndel Melton, Woodard & Curran (W&C)

DATE: February 6, 2019

SUBJECT: Groundwater Sustainability Plan Update

Issue

Update on the Cuyama Basin Groundwater Sustainability Agency Groundwater Sustainability Plan.

Recommended Motion

None – information only.

Discussion

Cuyama Basin Groundwater Sustainability Agency Groundwater Sustainability Plan consultant Woodard & Curran's GSP updates are provided as the following attachments:

Attachment 1 – GSP Update

Attachment 2 – Water Budget Update

Attachment 3 – Preliminary Discussion on Project and Management Actions

Attachment 4 – Presentation on Groundwater Dependent Ecosystems


Cuyama Basin Groundwater Sustainability Agency

Groundwater Sustainability Plan Update

February 6, 2019



Cuyama Basin Groundwater Sustainability Plan – Planning Roadmap

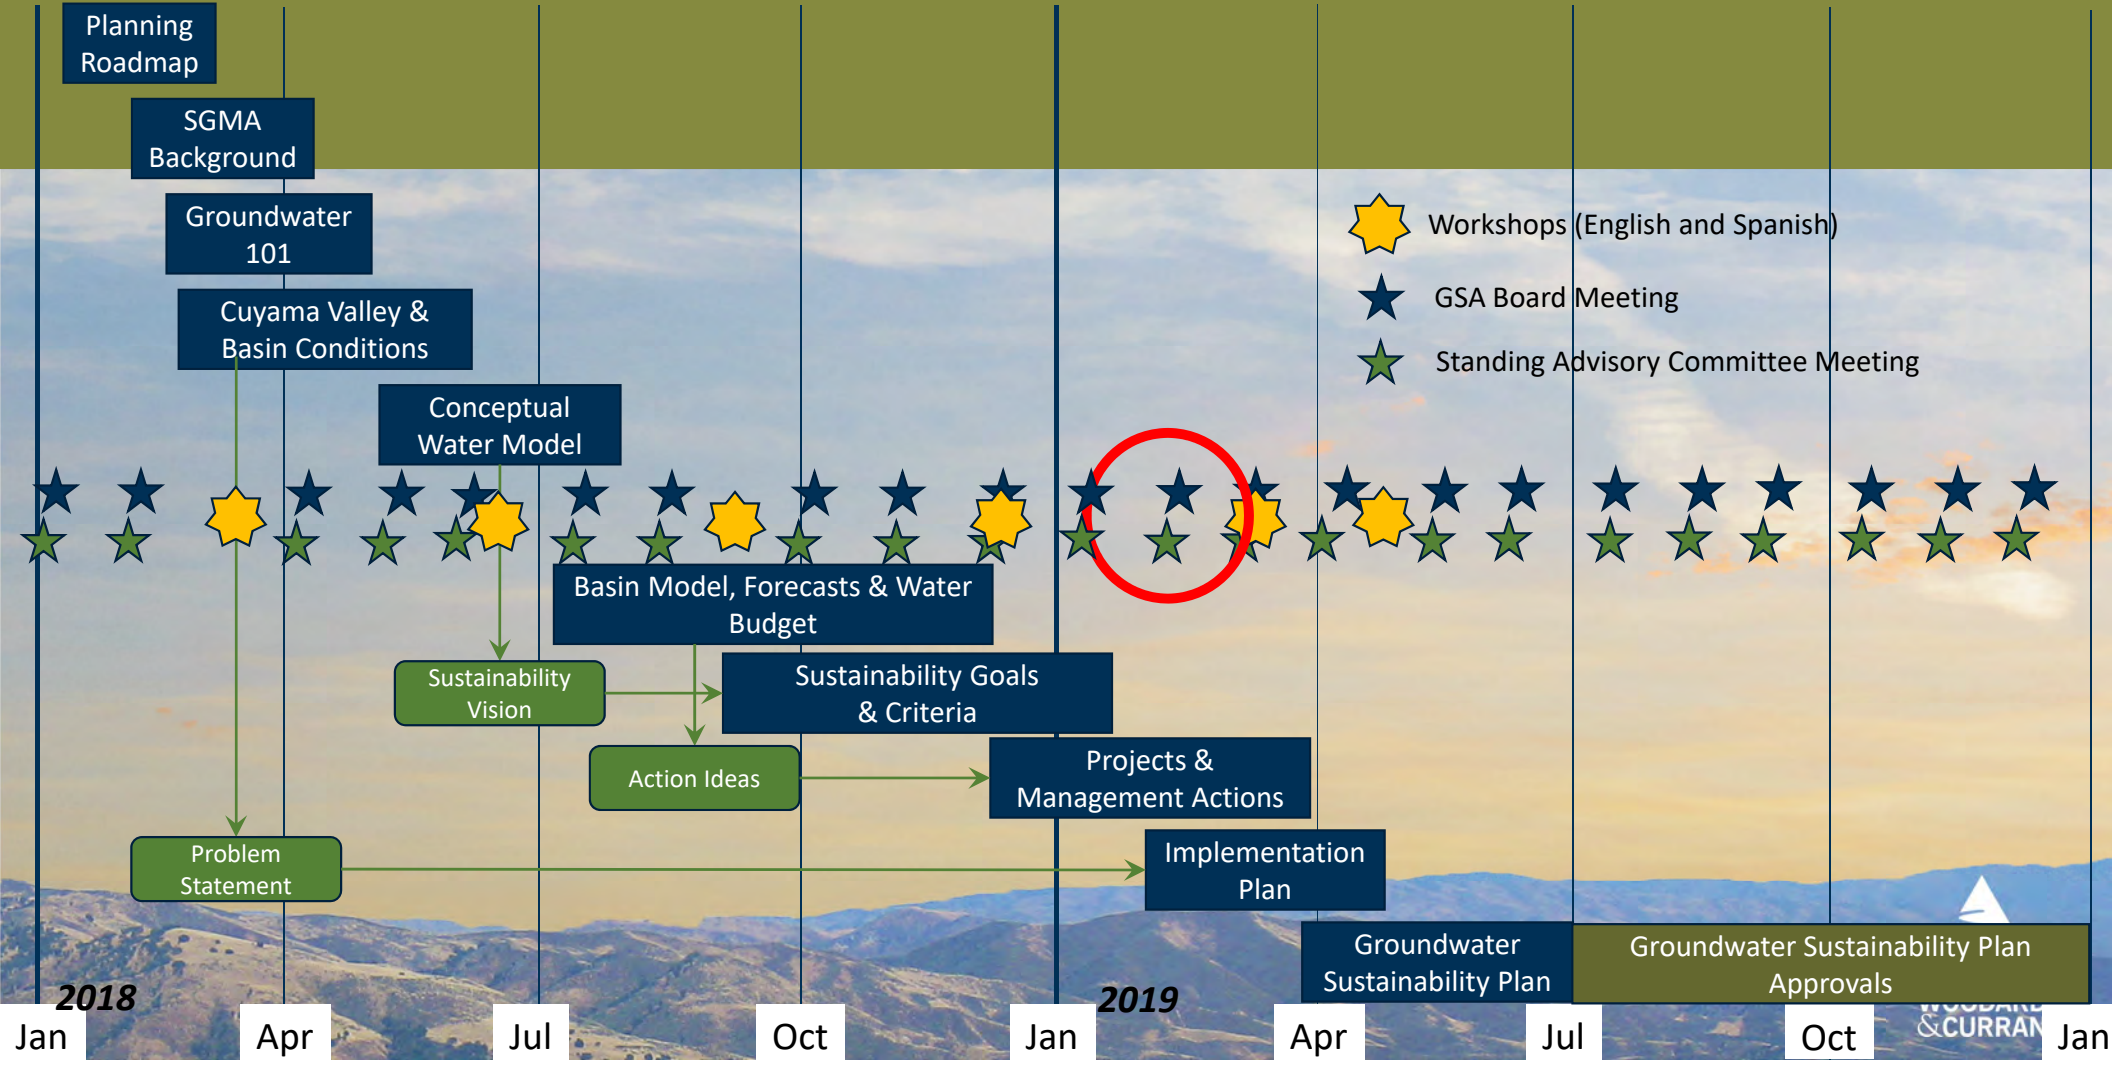

January GSP Accomplishments

- ✓ Developed revised threshold numbers per Board direction
- ✓ Facilitated discussion on thresholds at SAC/Board meetings
- ✓ Updated Data Management GSP chapter in response to comments
- ✓ Updated Monitoring Networks GSP chapter in response to comments
- ✓ Refined historical calibration and future conditions scenario of numerical model based on comments from Technical Forum



GSP Sections

1. Introduction
 - 1.1 GSA Authority & Structure
 - 1.2 Plan Area
 - 1.3 Outreach Documentation
2. Basin Settings
 - 2.1. HCM
 - 2.2 GW Conditions
 - 2.3 Water Budget


Appendix: Numerical GW Model Documentation
3. Undesirable Results
 - 3.1 Sustainability Goal
 - 3.2 Narrative/Effects
 - 3.2 ID Current Occurrence
4. Monitoring Networks
 - 4.1 Data Collection/Processing
 - 4.2 GSP Monitoring Networks
5. Sustainability Thresholds
 - 5.1 Threshold Regions
 - 5.2 Minimum Thresholds, Measurable Objectives, Margin of Operational Flexibility, Interim Milestones
6. Data Management System

Appendix: DMS User Guide
7. Projects & Management Actions
8. GSP Implementation


- SAC Discussion
- Comments Due
- Revised Draft
- SAC Approval
- ▷ Key Decisions
- ✓ Adopted Section

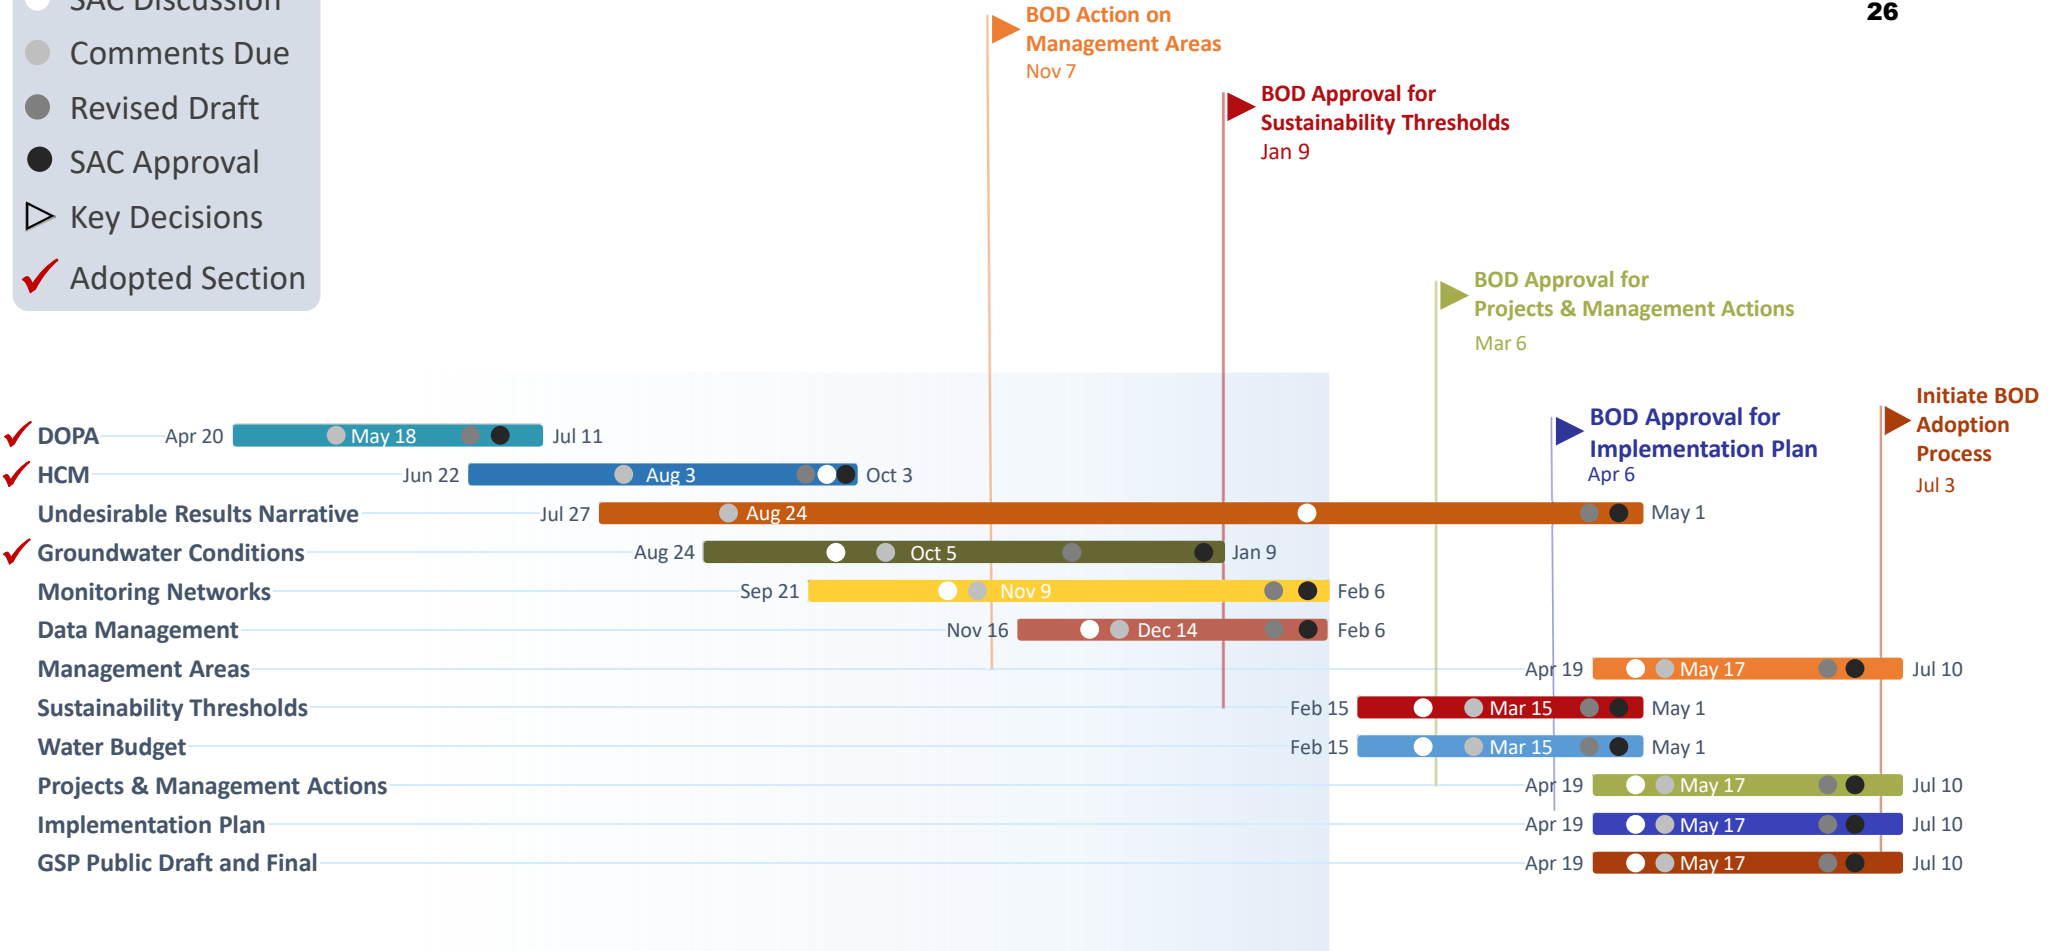

GSP Discussion Approach & Terminology

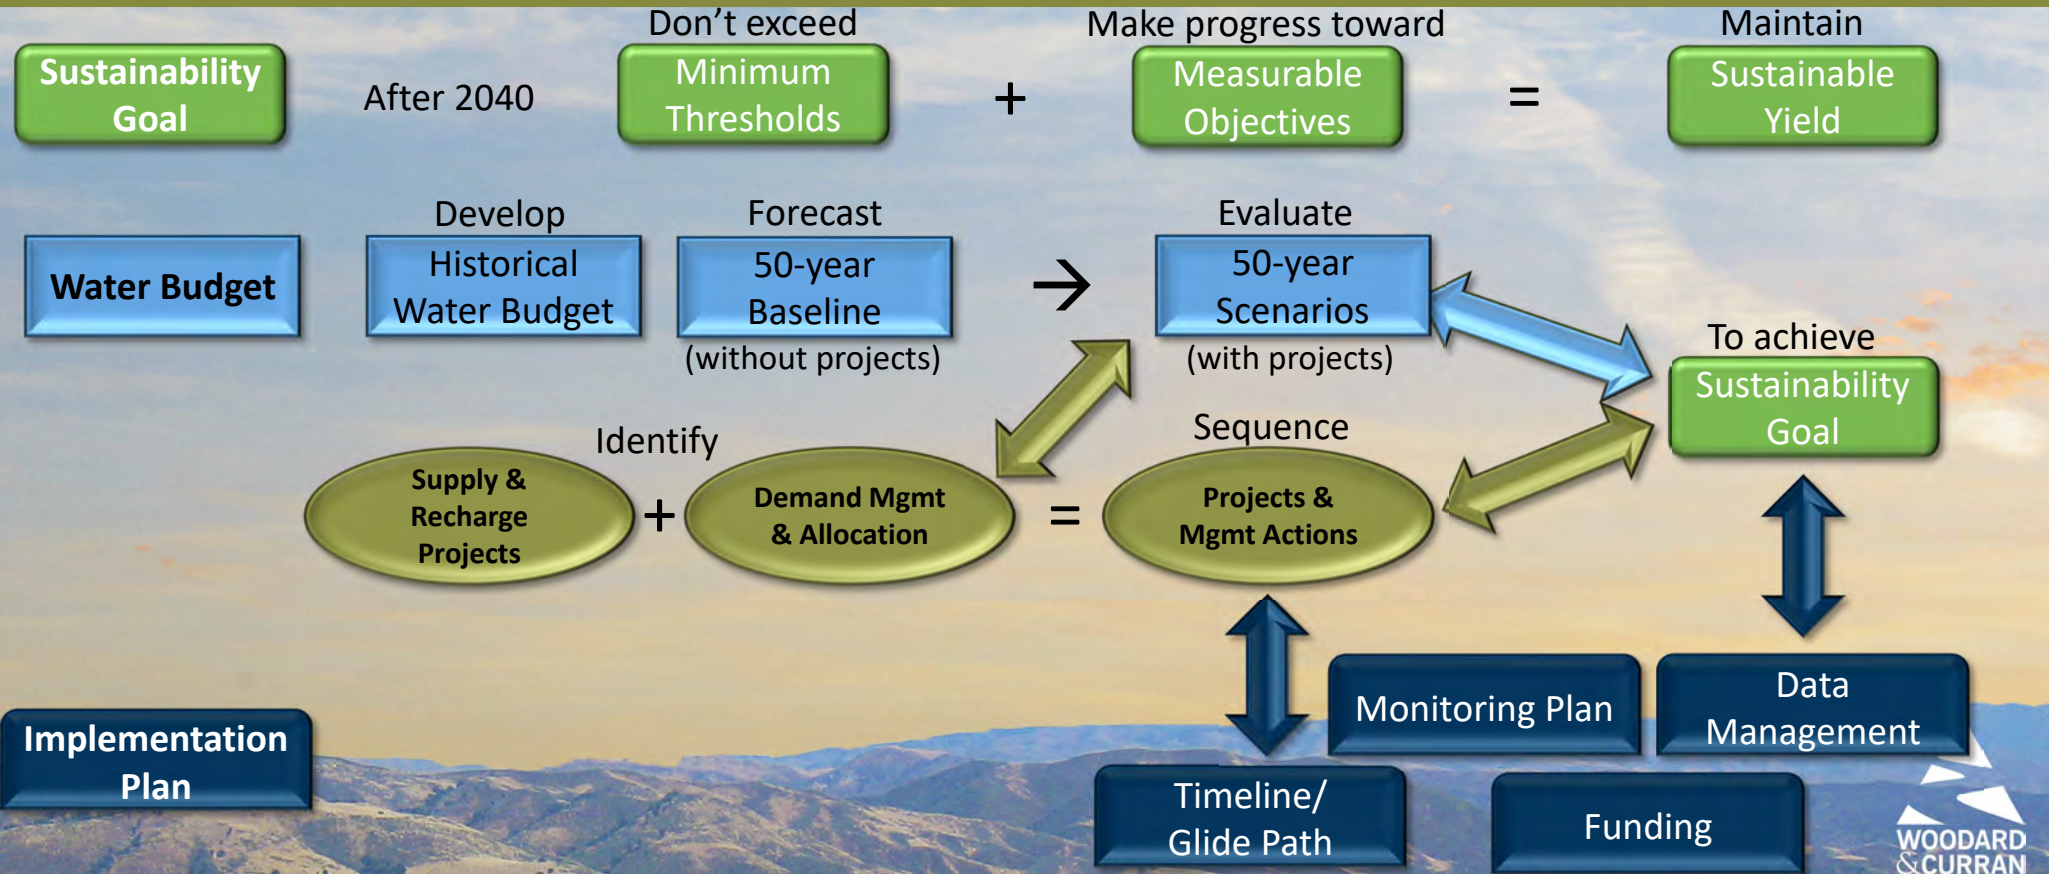

GSP Discussion Approach & Terminology

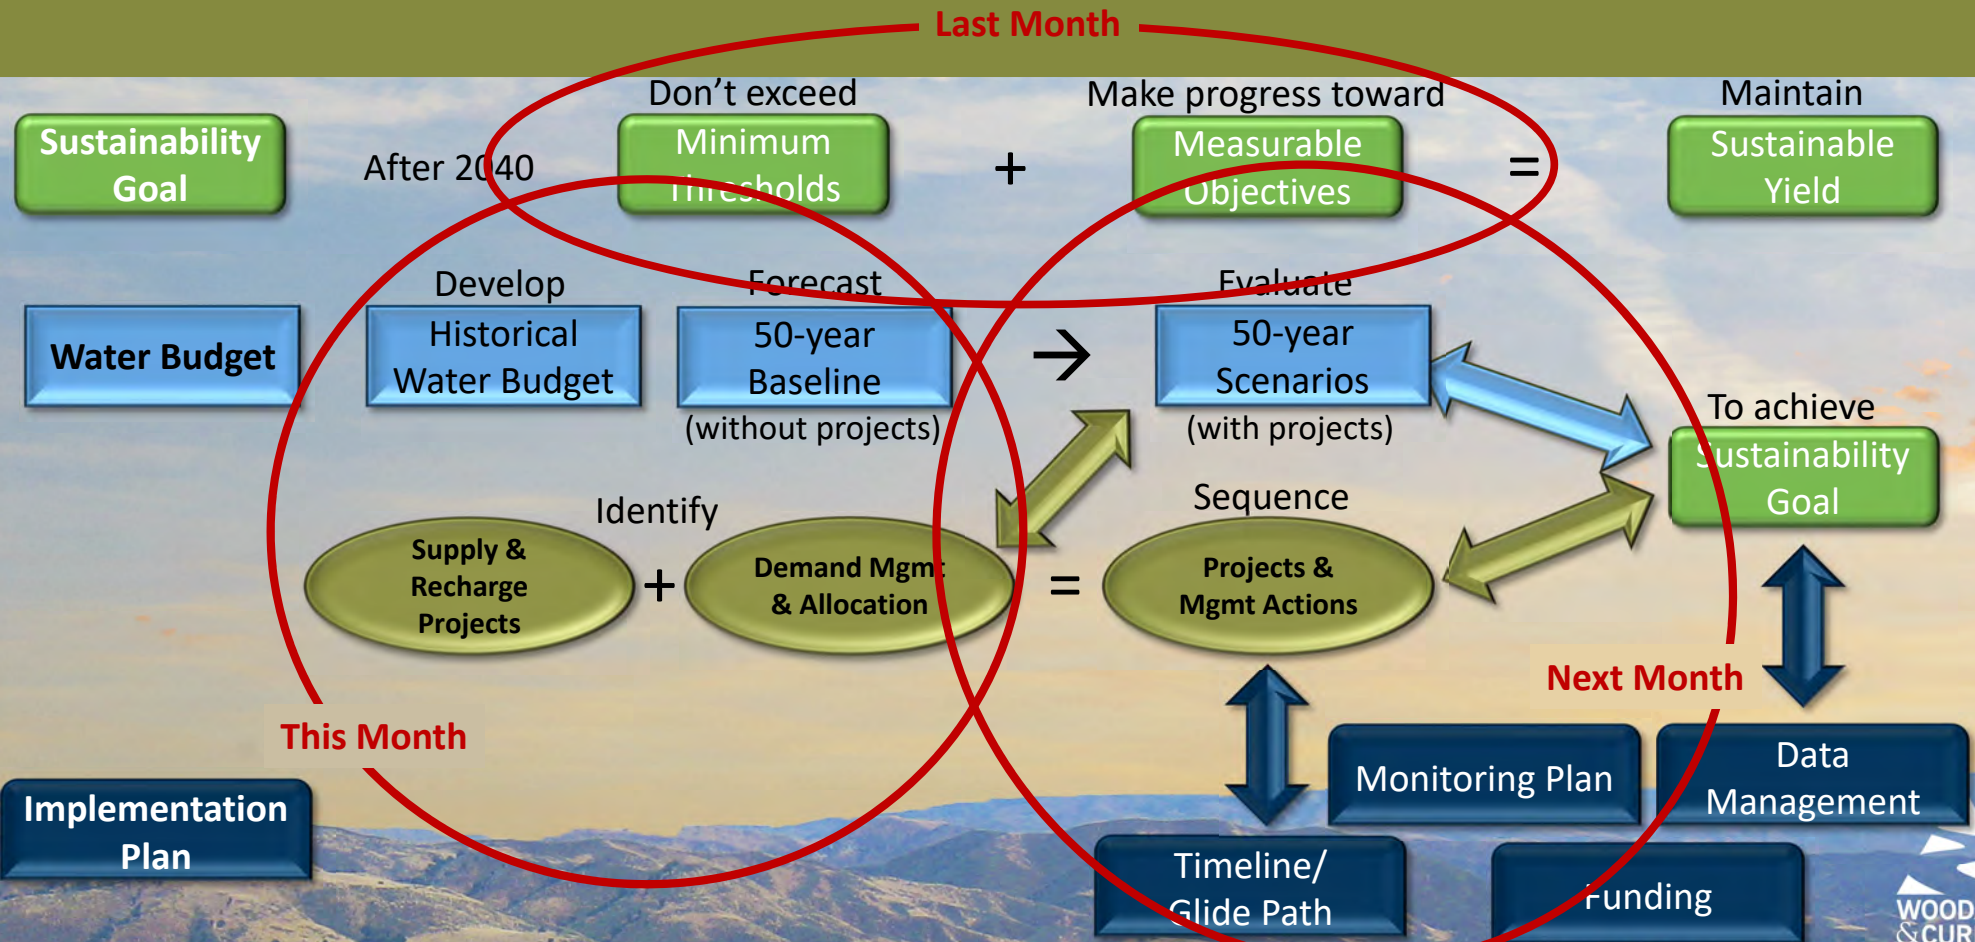

Cuyama Basin Groundwater Sustainability Agency

Water Budget Update

February 6, 2019



Water Budgets - Time Frames

Historical Conditions

Historical hydrology, land use and population (1995-2015)

Current Conditions


2017 land use and population
1967 - 2017 historical hydrology

Future Conditions

Year 2040 land use and population
- Assumed to be the same as
Current Conditions
1967- 2017 historical hydrology
With and without climate change

Future Conditions


Cuyama Basin Adjusted PRISM Precipitation

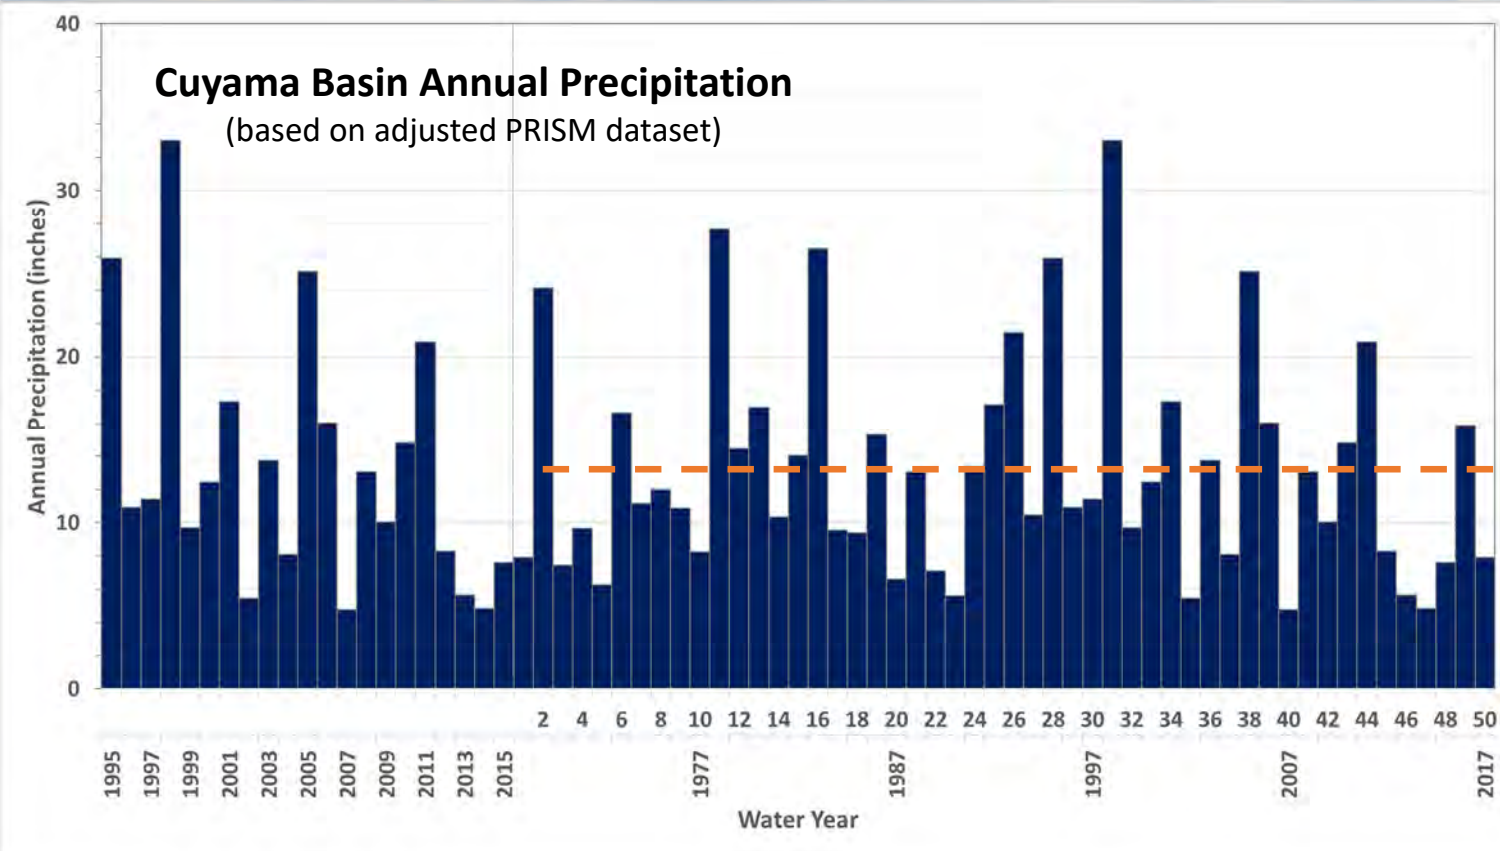


Average Annual Precipitation (50 years)

- Entire watershed: 13.1 inches
- Groundwater basin: 11.4 inches
- Foothills: 14.8 inches

Future Conditions Cuyama Basin Land Use

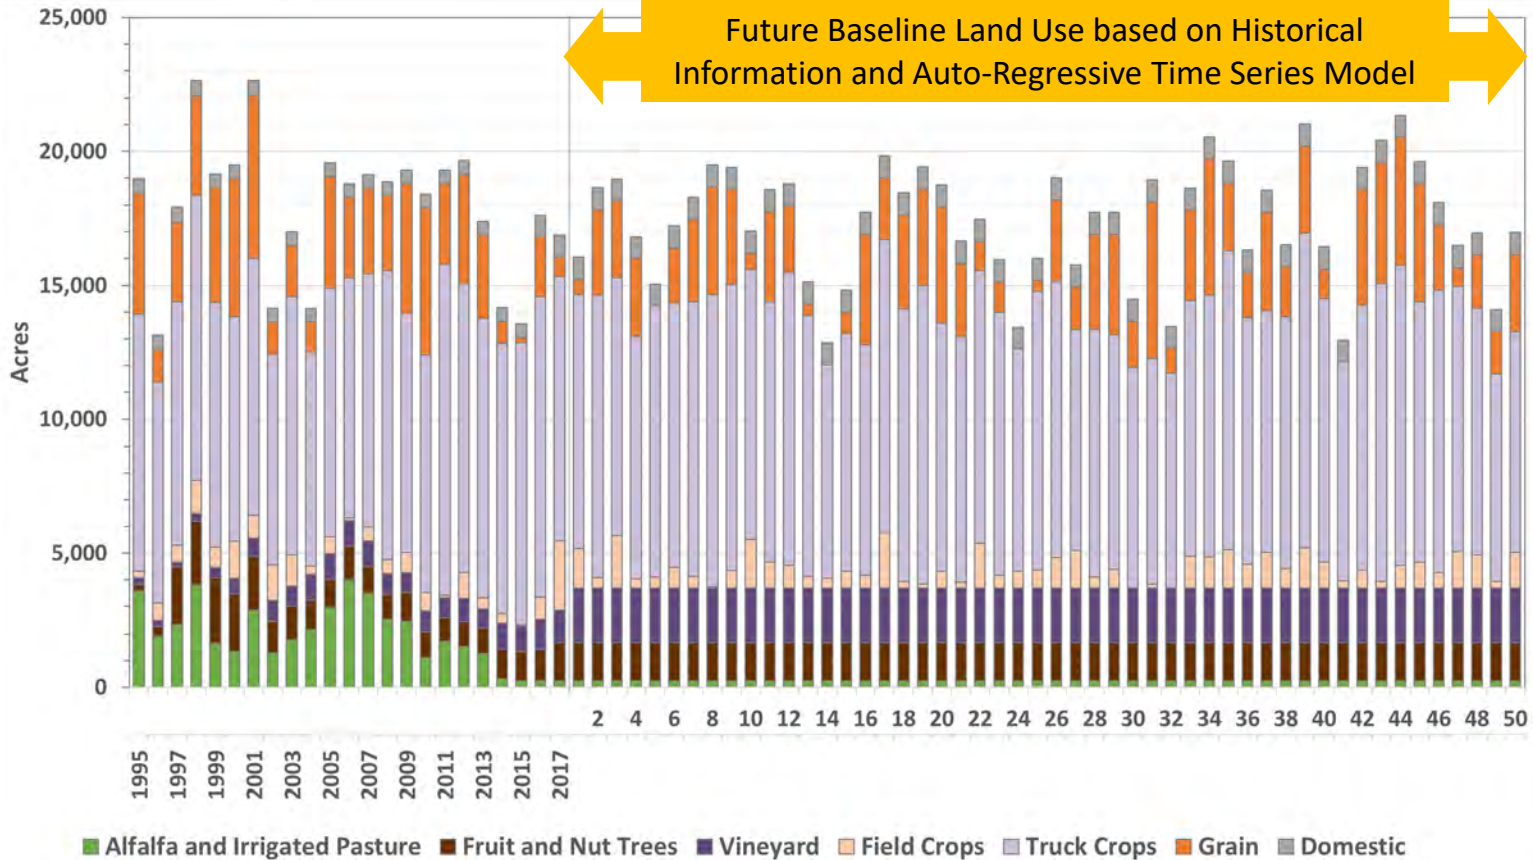

Future Conditions Land Surface Water Budget: Basin-Wide

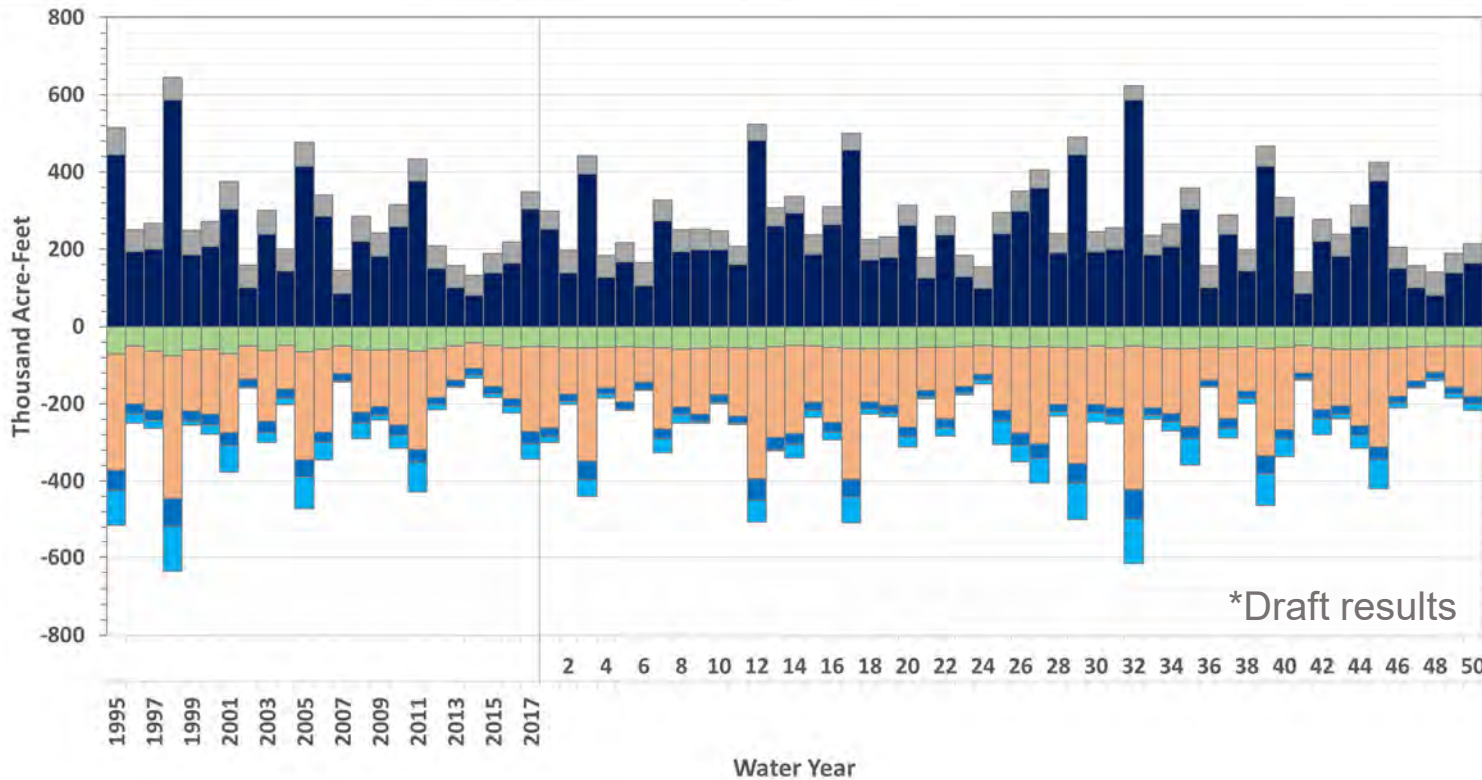

Average Annual (50 years) Inflows

■ Precipitation: 230 TAF (~11.4 in)

■ Applied Water 60 TAF

Outflows

■ Ag. Actual ET 57 TAF

■ NV Actual ET 182 TAF

■ Dom. Act. ET <0.1 TAF


■ Deep Perc. 24 TAF

■ Runoff 27 TAF

Future Conditions Groundwater Budget: Basin-Wide

DRAFT
34

ENTIRE MODEL AREA

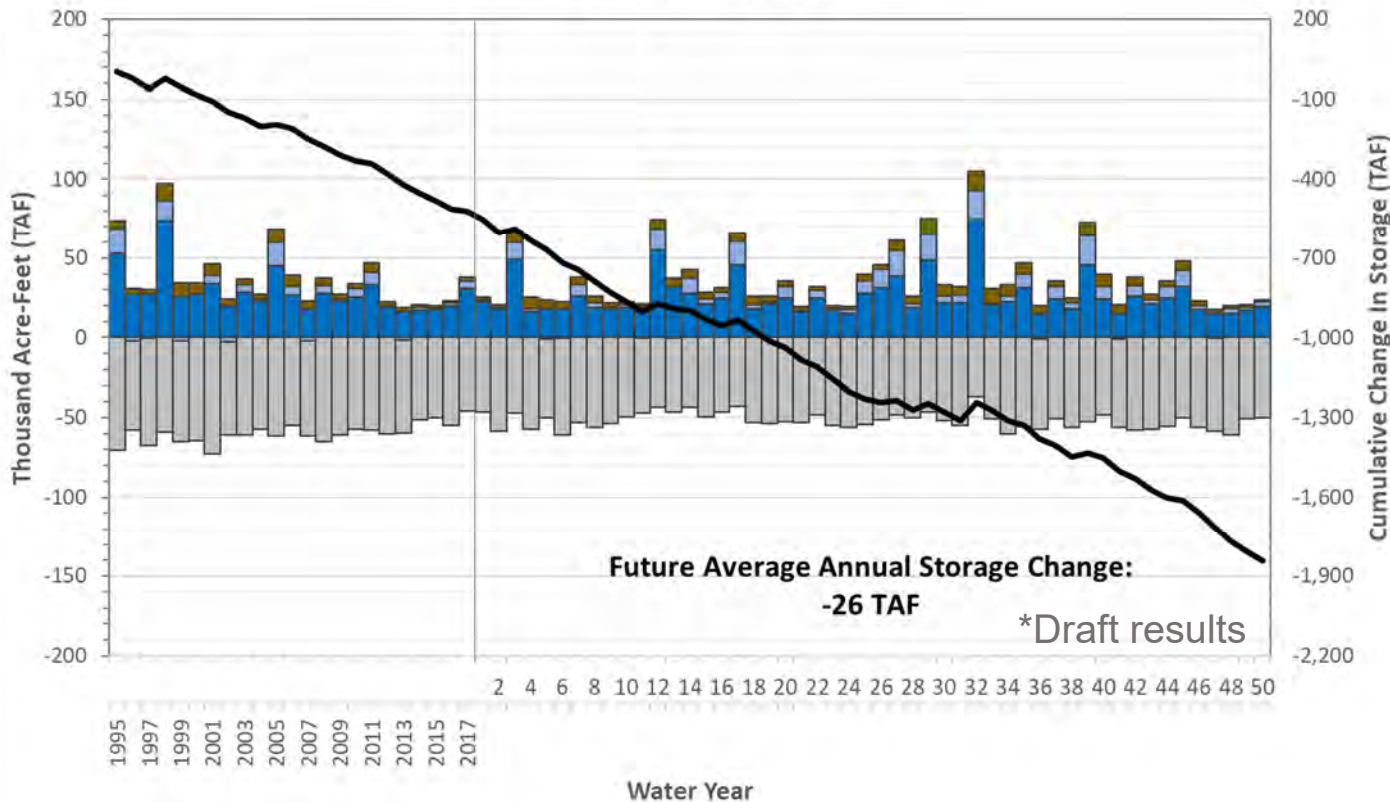

Average Annual (50 years)

Inflows:

- Deep Percolation 24 TAF
- Stream Seepage 5 TAF
- Boundary Flow 5 TAF

Outflows:

- GW Pumping 60 TAF

Average Annual Storage Change by Region


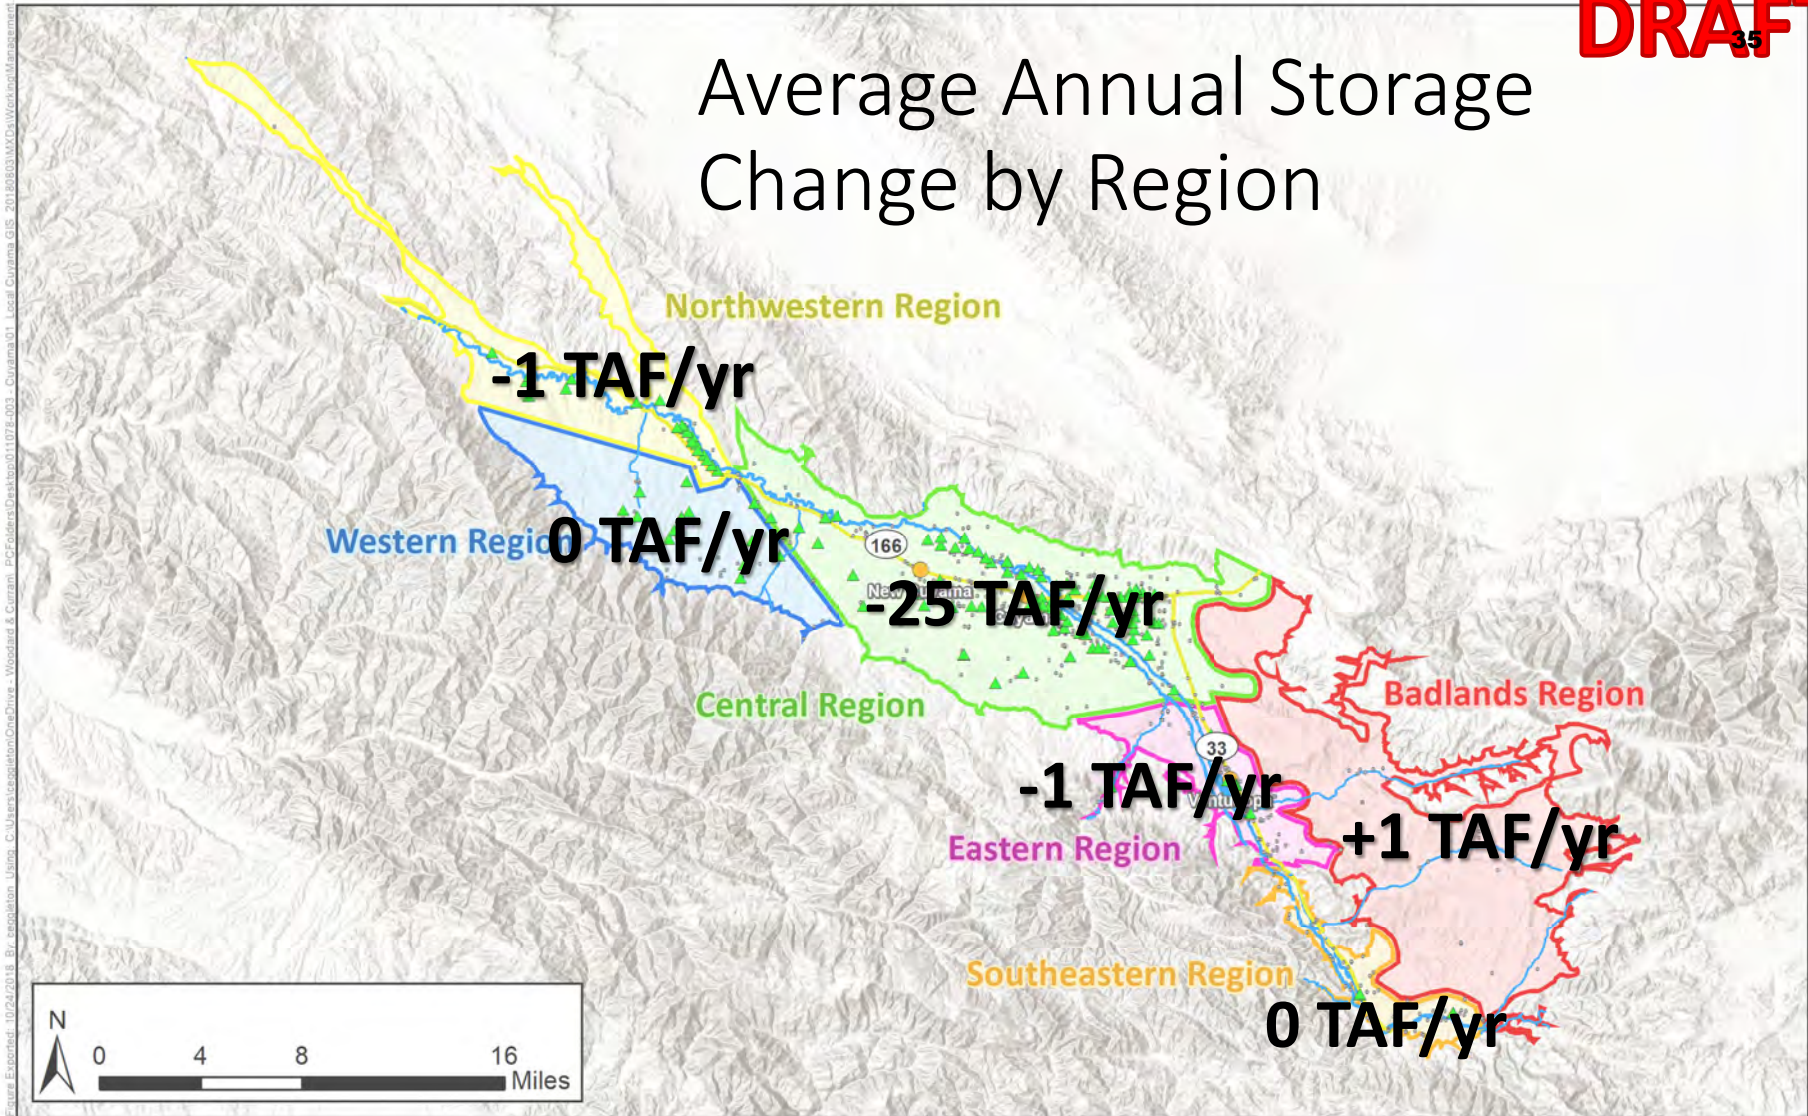


Figure Evaporate: 10/24/2018: Br. exaporation Using: C:\Users\exaporation\OneDrive - Woodward & Curran - PC\Folders\Desktop\011078-003 - Cuyama01 - Local Cuyama GIS 2018\803\MXDs\Work\MapManagement - Area 8


Northwestern Region

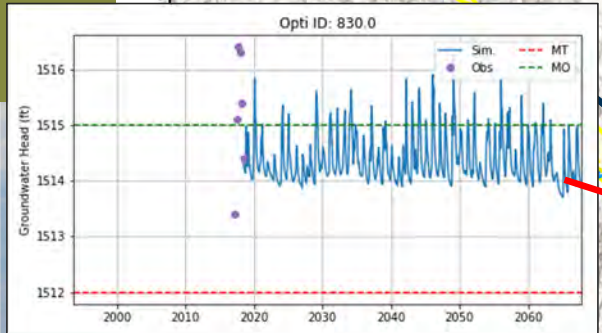

Western Region


Northwestern


Central

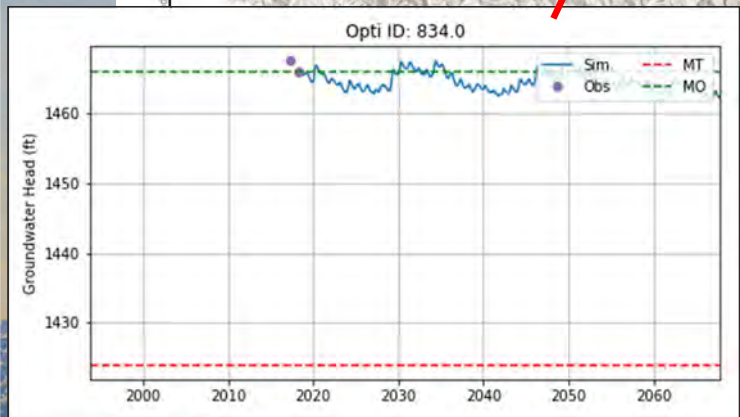

Hard & Current: PCFolders\G

Figure E-



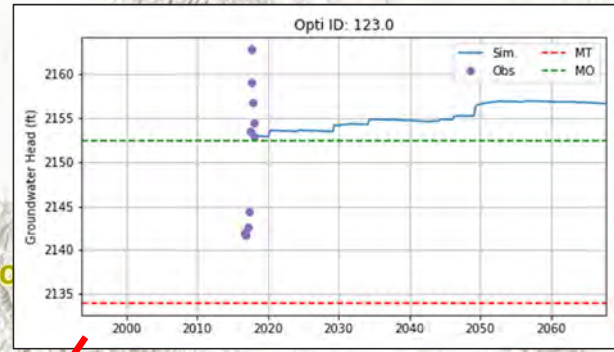

Western Region

Western Region

Central Region

Badlands Region





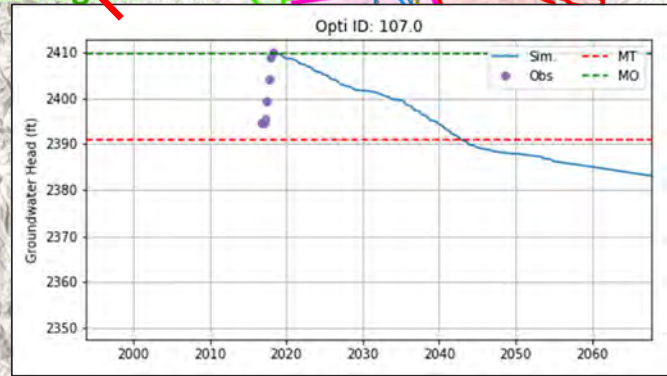


Figure Explorer: 101542618 - By: esep@slon.com - C:\Users\esep@slon\OneDrive - Woodard & Curran - PC\Folders\Ore\top\01107E-003 - Cuyama01 - Local - Cuyama GIS - 20180803\WX\Work\opt\Management - Areas

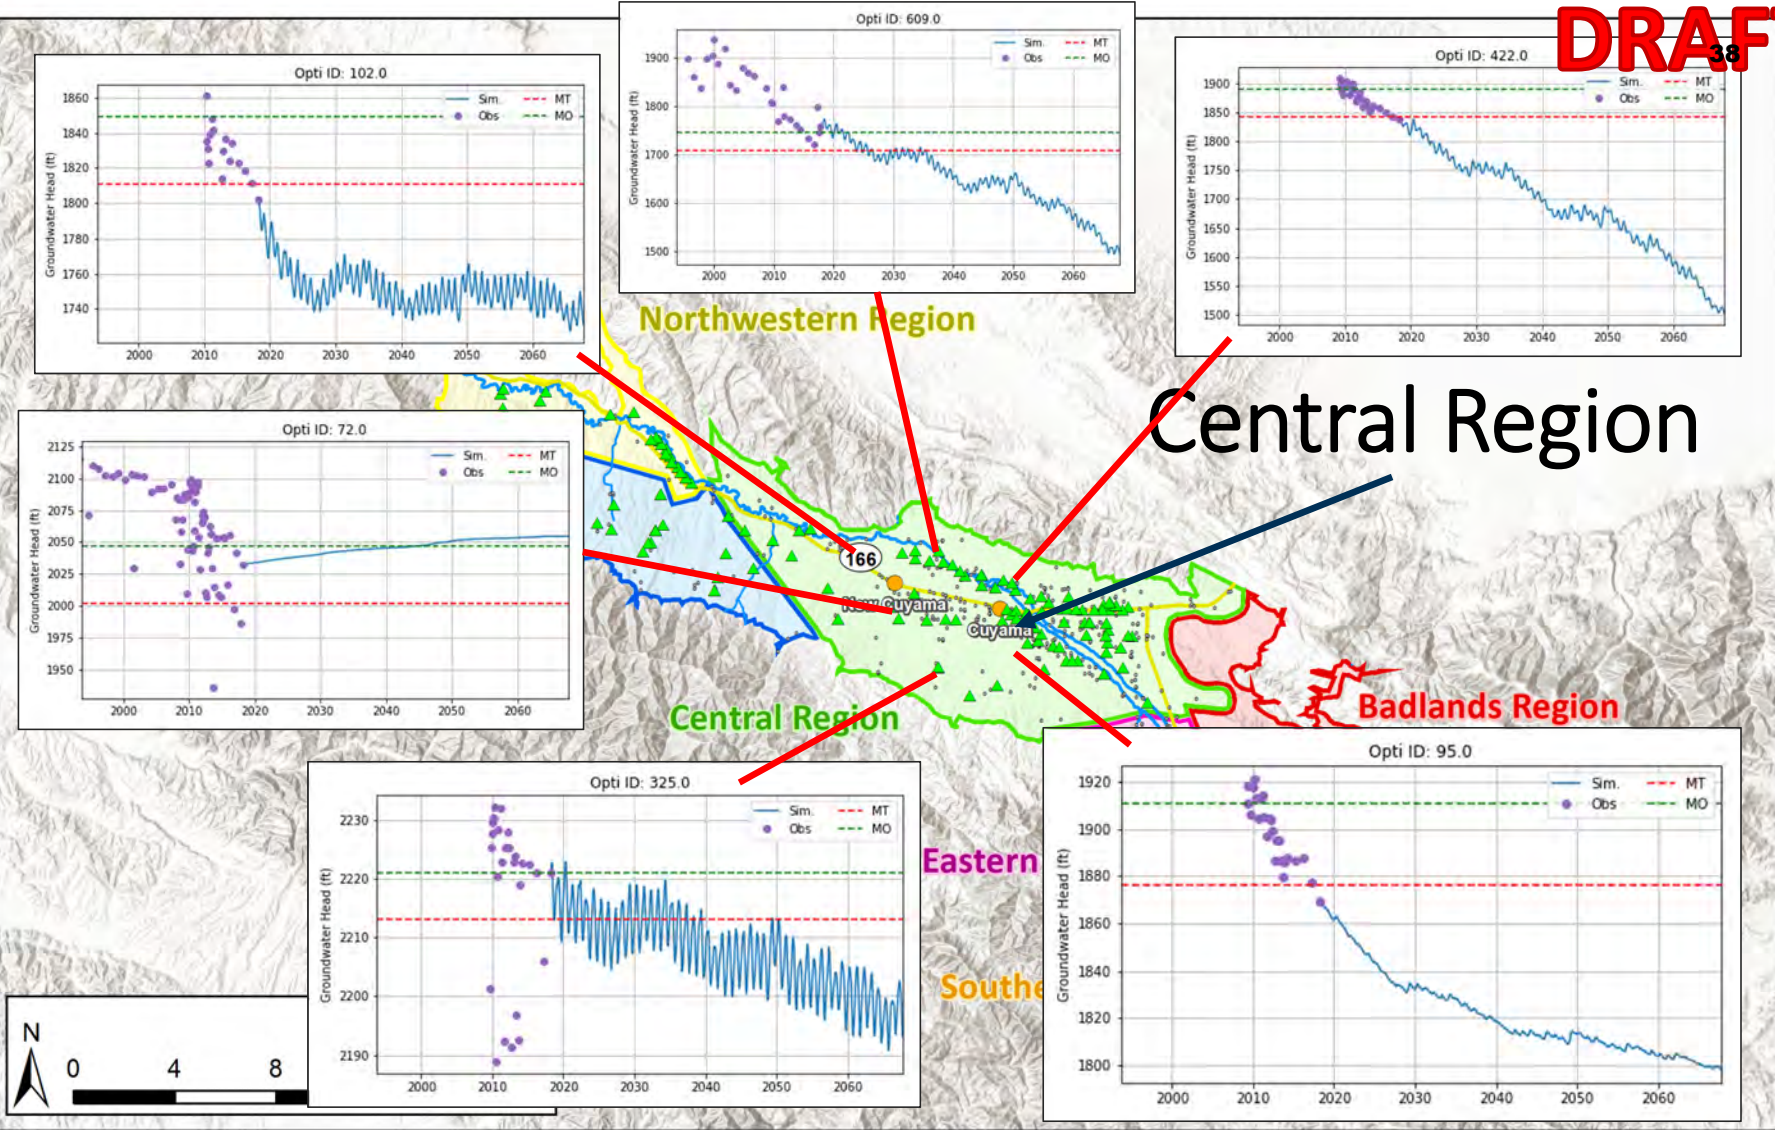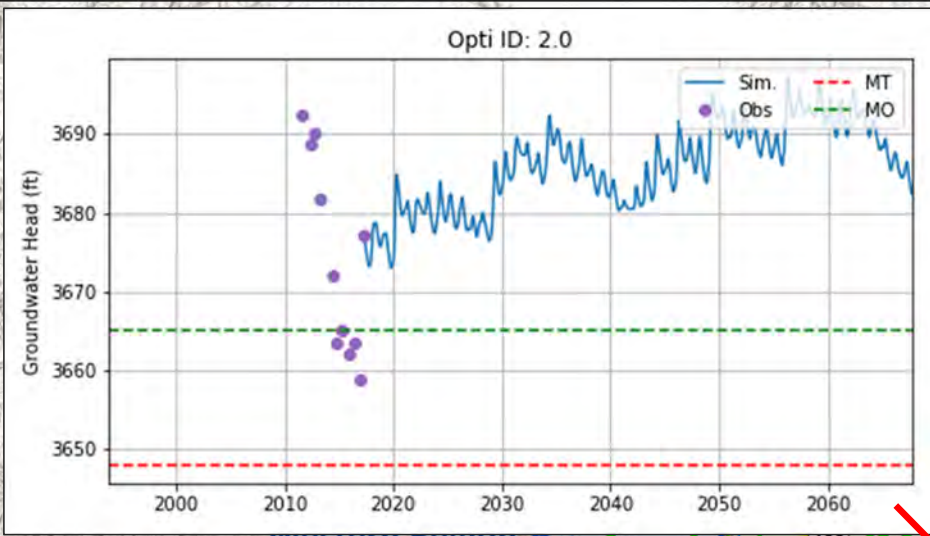

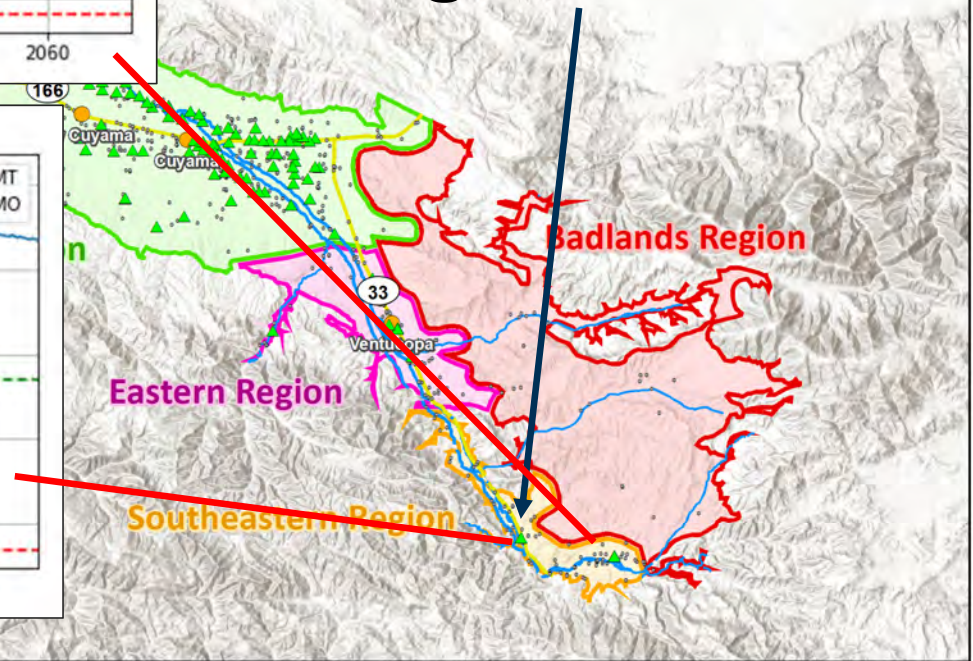






Southeastern Region

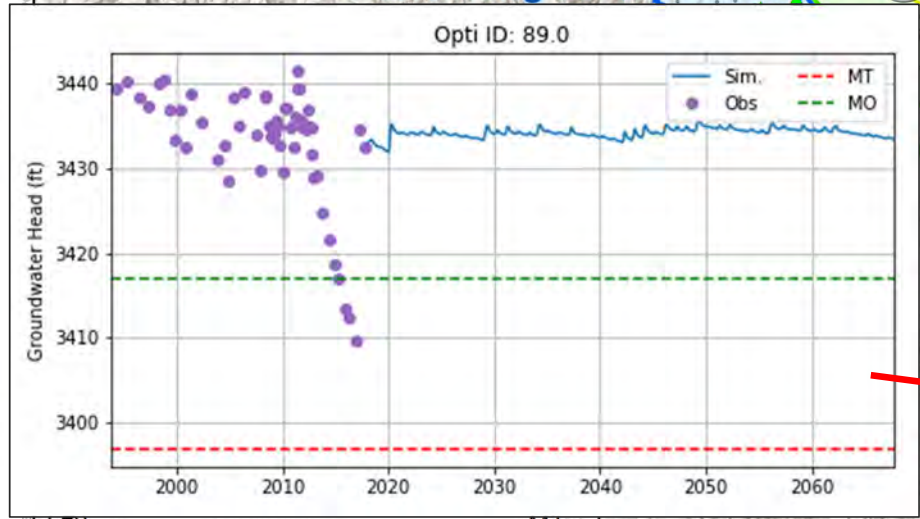

C:\Folders\Projects\01107E-003 - Cuyama\01 - Local - Cuyama - GIS - 2018\08\03\Map\Work\Map\Management - Areas

Figure 1

WARD
RAN

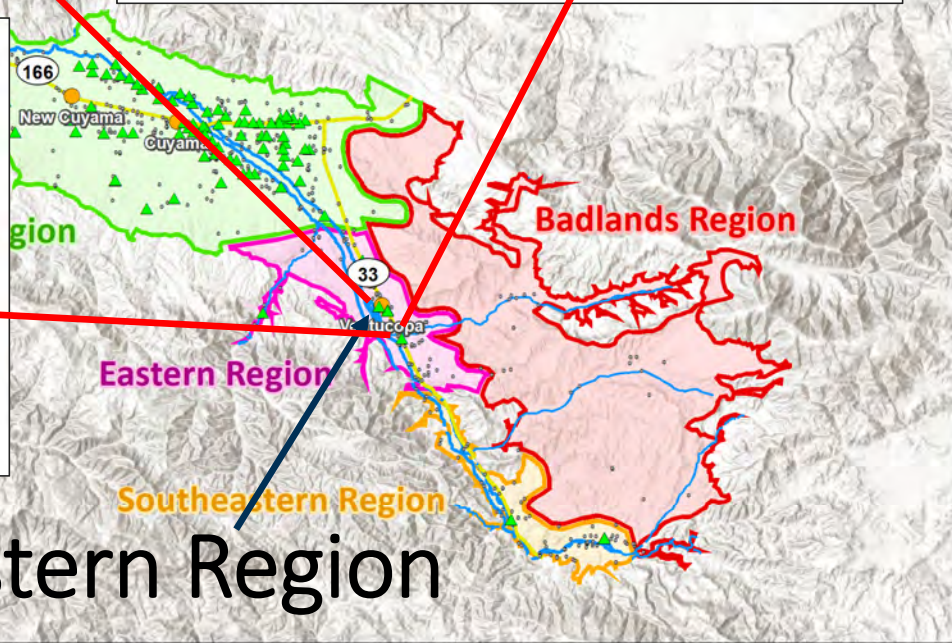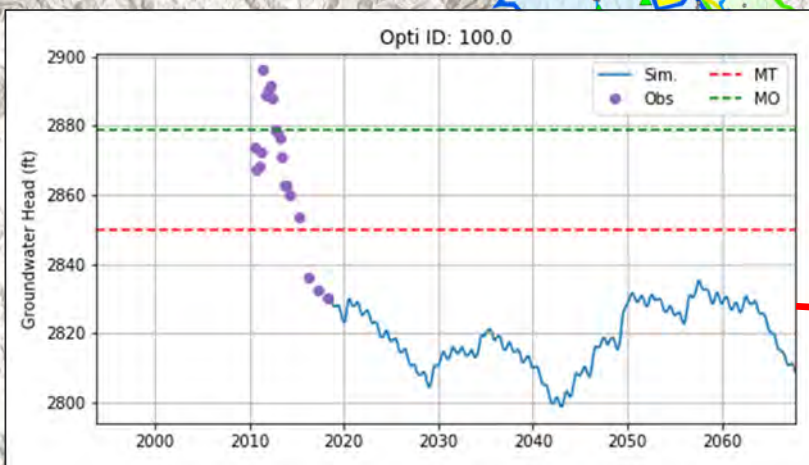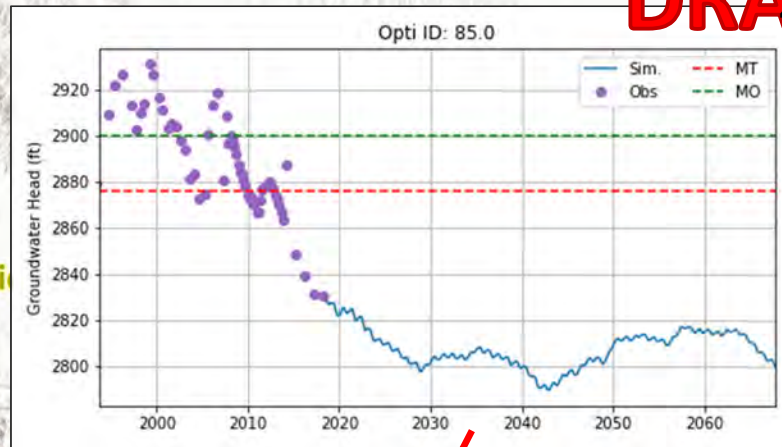
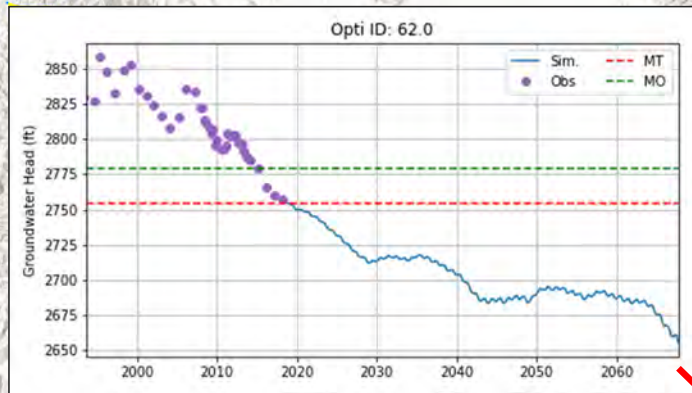


Eastern Region

Figure Explorer: 101525218 - Environment - User: C:\Users\scaplan\OneDrive - Woodard & Curran - PC\Folders\Projects\101525-003 - Cuyama01 - Local - Cuyama GIS - 20180603\MXD\Working\Map\MapArea1

DRAFT

Future Conditions Groundwater Level Change

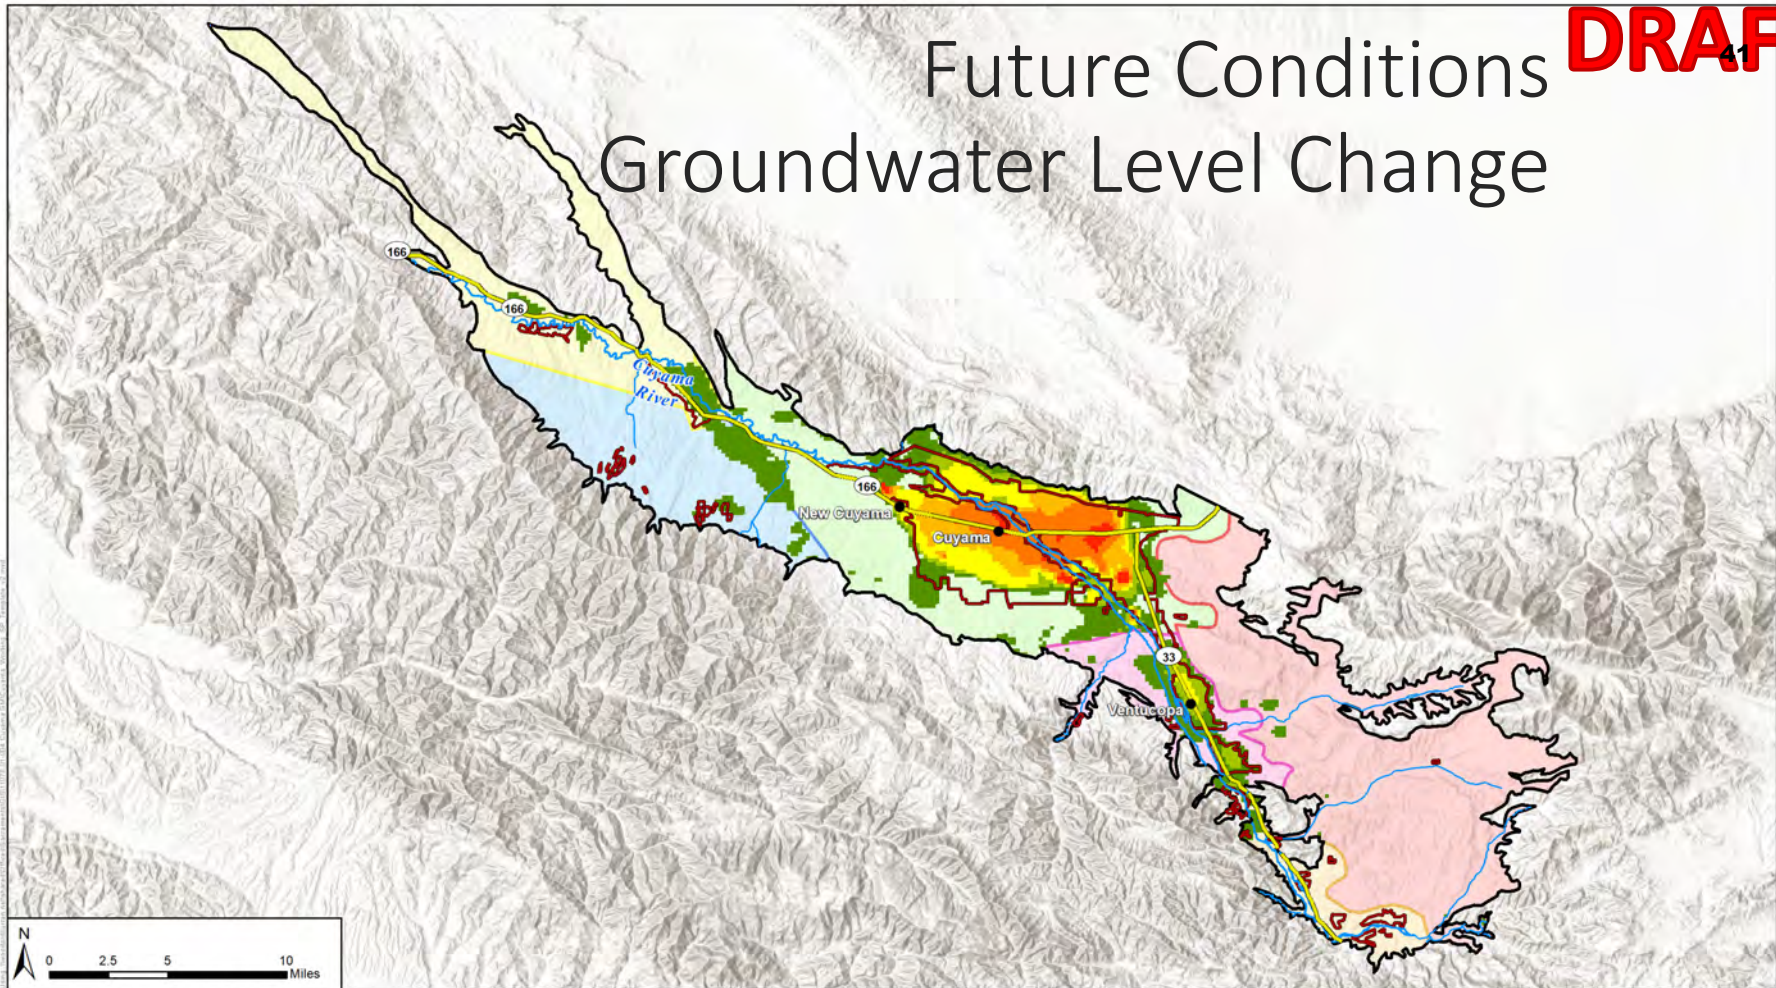

Projected Average Change in Groundwater Level
Cuyama Basin Groundwater Sustainability Agency
Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
01/24/2019



Legend

- Towns
- Irrigation Areas*
- Highways
- Streams
- Cuyama Basin
- Projected Avg. Change in GWL (ft/yr)**
 - 7.7 to -5
 - 5 to -4
 - 4 to -3
 - 3 to -2
 - 2 to -1
 - 1 to -0.2
 - 0
 - Badlands Region
 - Central Region
 - Eastern Region
 - Northwestern Region
 - Southeastern Region
 - Western Region

DRAFT
Notes:
* 2016 LandIQ land use
** Based on the Cuyama Basin Water Resources Model baseline scenario



Cuyama Basin Groundwater Sustainability Agency

Projects and Management Actions

February 6, 2019



Process for Identifying and Analyzing Management Actions and Projects ⁴³

- Solicit public input on potential actions and projects (Sep)
- Evaluation and characterization of actions and projects (Sep-Jan)
- **Discuss potential actions with SAC and Board (Jan-Feb)**
- Numerical modeling of management action alternatives (Feb)
- Present numerical modeling results to SAC and Board (Feb-Mar)

Projects and Management Actions to Close the Gap Between Water Supplies and Demands

44

- Water supply projects to increase available supplies
- Management actions to reduce groundwater pumping
- Adaptive management to respond to changes in supplies and demands over time



Projects and Management Actions Considered

- New pumping wells for local communities
 - Cuyama CSD & Ventucopa
- Projects to increase net Basin water supply
 - Flood/Stormwater Capture
 - Municipal Area Rainwater Capture
 - Rangeland Management
 - Water Supply Imports via Pipeline
 - Water Supply Imports via Transfer/Exchange
 - Precipitation Enhancement
- Demand management/allocation approaches

New Pumping Well for Cuyama CSD & Ventucopa

- Potential Yield: up to 460 gpm (CCSD) or 55 gpm (Ventucopa)
- Estimated Cost: ~\$1,175,000
- Planning Horizon: 0-5 years
- Description: Addresses issues with access to reliable water supplies. Drill a replacement well for CSD well #2, which has been abandoned. Construct a new water supply pump, pipeline and meters for Ventucopa's existing well.
- Potential Implementation Issues: How to finance
- Recommendation: Include in GSP portfolio of projects

Sources: *Cuyama Community Services District Well No. 4 Drilling and Equipping Project*, February 2018
Ventucopa Water Supply Company Water System Evaluation Report, February 2007

Flood/Stormwater Capture

- Potential Yield: 4,400 AF/year
- Estimated Cost: \$600-800/acre-foot
- Planning Horizon: 0-5 years
- Description: The addition of surface water into a groundwater aquifer through surface infiltration. Recharge locations would be determined based on soil properties, current groundwater conditions and projected surface flow conditions.
- Potential Implementation Issues: Water available for recharge may be limited by downstream water rights; requires acquisition of land for spreading grounds
- Recommendation: Include as an option in the GSP and perform detailed studies to refine potential yield and cost

Municipal Area Rainwater Capture

- Potential Yield: 1-2 AF/year
- Estimated Cost: \$5,500/acre-foot
- Planning Horizon: 0-5 years
- Description: The capture and storage of rainwater or overland flow in residential areas using rain barrels or cisterns prior to the water reaching surface water bodies.
- Potential Implementation Issues: Requires significant public outreach; may require subsidized incentive plan
- Recommendation: Do not include in GSP portfolio of projects due to high cost and low potential yield

Source: Santa Barbara County, *Long Term Supplemental Water Supply Alternatives Report*, December 2015

Rangeland and Forest Management

- Potential Yield: undetermined
- Estimated Cost: \$500/acre-foot
- Planning Horizon: 0-5 years
- Description: Removal of native vegetation in forest or rangeland areas through controlled burning could reduce water consumption through decreased evapotranspiration
- Potential Implementation Issues: potential adverse effects on wildlife habitat; air quality concerns from smoke and dust; potential increase in flood flows due to reduced water interception
- Recommendation: Do not include in GSP portfolio of projects due to uncertain benefits and potential wildlife and air quality impacts

Water Supply Imports via Pipeline

- Potential Yield: undetermined
- Estimated Cost: \$5,000-10,000/acre-foot
- Planning Horizon: 10-20 years
- Description: Purchase water transfer or excess SWP water and import into Cuyama Basin via a new pipeline
- Potential Implementation Issues: High cost and reliability of potential supplies
- Recommendation: Do not include in GSP portfolio of projects due to cost

Water Supply Imports via Exchange

- Potential Yield: undetermined
- Estimated Cost: \$600-\$2,800/acre-foot
- Planning Horizon: 10-20 years
- Description: Purchase water transfer or excess SWP water and exchange with water users downstream of Lake Twitchell to allow for greater floodwater capture upstream
- Potential Implementation Issues: High cost, willingness of downstream users to enter exchange program
- Recommendation: Include for consideration for future study as part of stormwater capture analysis during GSP implementation phase

Precipitation Enhancement

- Potential Yield: 1,000-5,000 AF/year
- Estimated Cost: \$20-30/acre-foot
- Planning Horizon: 0-5 years
- Description: The introduction of atmospheric silver iodide to serve as condensation nuclei that would increase snowfall over mountain regions; rainfall could potentially increase by 5-15% in the Cuyama Basin
- Potential Implementation Issues: operational precision; potential concerns about silver toxicity
- Recommendation: Include as an option in the GSP and perform detailed studies to refine potential yield and cost


Summary of Potential Projects

- Are there any clarifying questions on the potential projects?
- Are there any comments on the proposed recommendations?

Option	W&C Recommendation	SAC Recommendation
New Pumping Well for Cuyama CSD & Ventucopa	Include in GSP portfolio of projects	Same as W&C
Flood/Stormwater Capture	Include in GSP portfolio of projects and perform detailed study going forward	Same as W&C
Municipal Area Rainwater Capture	Do not include in GSP portfolio of projects	Mixed. Possibly add this under a new project category titled “Ensure Reliable Water Supply for Domestic Areas” to include: Conservation Strategy, New Wells, Rainwater Capture, and others.
Rangeland and Forest Management	Do not include in GSP portfolio of projects	Perform detailed study of this option going forward
Water Supply Imports via Pipeline	Do not include in GSP portfolio of projects	Same as W&C
Water Supply Imports via Exchange	Do not include in GSP portfolio of projects; include in future analyses of flood/stormwater capture	Same as W&C
Precipitation Enhancement	Include in GSP portfolio of projects and in GSP modeling analysis and perform detailed study going forward	2 votes – Do not include in GSP (Draucker, Post) 1 vote – Include in GSP (Kelly) 2 votes – Perform future study (Jaffe, Valenzuela)

Demand Management/Allocation Approach

- Under SGMA, GSAs have authority to establish groundwater extraction allocations
- SGMA and GSPs adopted under SGMA cannot alter water rights
- Potential components of a demand management approach:
 - Pumping restrictions/allocations
 - Water accounting
 - Water metering
 - Water market
 - Fees
 - By pumping amount or acreage
 - Glide path

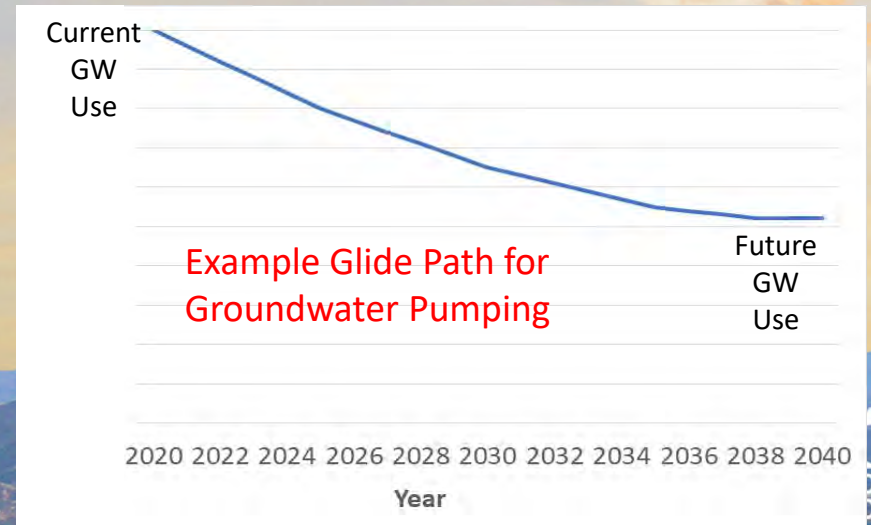

Examples of Allocation Methods

Method	Description	Advantages	Disadvantages
Pro Rata Allocation per Overlying Acre	Divides available groundwater proportional to property size	<ul style="list-style-type: none"> ● Recognizes correlative nature of groundwater rights ● Simple approach in calculation 	<ul style="list-style-type: none"> ● Creates inequities for those who have invested in use of groundwater ● Ignores legal limitations on use
Pro Rata Allocation per Irrigated Overlying Acre	Allocates each irrigated acre a specific quantity of groundwater	<ul style="list-style-type: none"> ● Acknowledges existing pumping ● Simple approach in calculation 	<ul style="list-style-type: none"> ● Does not consider unexercised groundwater rights ● Does not recognize historic use ● Ignores legal limitations on use
Allocation Based on Fraction of Historic Pumping	Allocates water based on historic groundwater use	<ul style="list-style-type: none"> ● Potential to reduce conflict among existing pumpers 	<ul style="list-style-type: none"> ● Requires data re historic use ● Ignores correlative nature of groundwater rights
Hybrid	Applies above methods differently in different parts of the Basin	<ul style="list-style-type: none"> ● Provides greatest flexibility 	<ul style="list-style-type: none"> ● Additional complexity due to lack of consistency across Basin

Example Application of Allocation Methods – Pro Rata ⁵⁶

- Example Basin:
 - 300 AF sustainable yield
 - 300 irrigated acres out of 600 total acres
- Computation: Take 300 AF (sustainable yield) divided by total basin acreage (600 acres) ~ 0.5 AF/ac
- GSAs can modify implementation and allocation within GSA, but establishes basis for basin-wide management

Advantages	Disadvantages
<ul style="list-style-type: none">• Simple• Recognizes correlative nature of GW rights	<ul style="list-style-type: none">• Does not explicitly account for appropriators / prescriptive rights• Allocates same amount to irrigated and unirrigated acres

Example Application of Allocation Methods – Pro Rata (Irrigated Acres) ⁵⁷

- Example Basin:
 - 300 AF sustainable yield
 - 300 irrigated acres out of 600 total acres
- Take 300 AF (sustainable yield) divided irrigated acres (300 acres) ~ 1.0 AF/irrigated ac
- GSAs can modify implementation and allocation within GSA, but establishes basis for basin-wide management

Advantages	Disadvantages
<ul style="list-style-type: none">• Simple• Acknowledges existing pumping	<ul style="list-style-type: none">• Does not explicitly account for appropriators / prescriptive rights• Does not account for unexercised GW rights

Example Application of Allocation Methods – Historic Pumping

- Review historic pumping data for agricultural users (if available)
- Overlying users could be allocated on a per-acre basis OR based on historic use if that information is available
- GSAs can modify implementation and allocation within GSA, but establishes basis for basin-wide management

Advantages	Disadvantages
<ul style="list-style-type: none">• Less likely to result in conflict among users• Explicitly accounts for appropriative use / prescriptive rights	<ul style="list-style-type: none">• Requires more data• If unirrigated acres are excluded, does not account for unexercised GW rights

***Numbers presented are preliminary draft estimates for discussion purposes only and require additional review and vetting*

Recommendation for Next Steps on Projects and Actions ⁵⁹

- Perform modeling analysis to determine action needed to achieve sustainable yield under the following scenarios:
 - Pumping reductions only
 - With water supply projects and pumping reductions
- Report on updated water budgets and sustainable yield results with implemented actions at next Tech Forum/SAC/Board meetings

Key Implementation Plan Components

- Establishment of Monitoring Program
 - Coordination with monitoring entities
 - Agreements with local landowners
- Data Collection and Analysis
 - Water levels, water quality, subsidence
- Annual reporting
- GSP Five-year Update
 - Re-evaluation of thresholds
 - Review/update of numerical model
 - More detailed analysis of potential projects/actions
- Ongoing GSA Administration
 - Maintenance of DMS, website
 - Board/SAC meetings and other stakeholder outreach
- Financing Plan

Cuyama Basin Groundwater Sustainability Agency

Groundwater Dependent Ecosystems

February 6, 2019




Groundwater Dependent Ecosystems (GDEs)

- SGMA requirements:
 - Identification of GDEs (10727.2(a))
 - Describe impacts of management actions on GDEs (10727.4)
 - But no specific management actions are required to protect identified GDEs
- Summary of W&C Analysis:
 - Used Nature Conservancy dataset
 - Verified polygons by licensed biologist
 - Reviewed relationship between GDEs and monitoring
 - Verified GDEs

Groundwater Dependent Ecosystems (GDEs)

- Nature Conservancy (NC) Dataset
- Identifies potential vegetation and wetlands dependent on groundwater
- DWR recommends verification

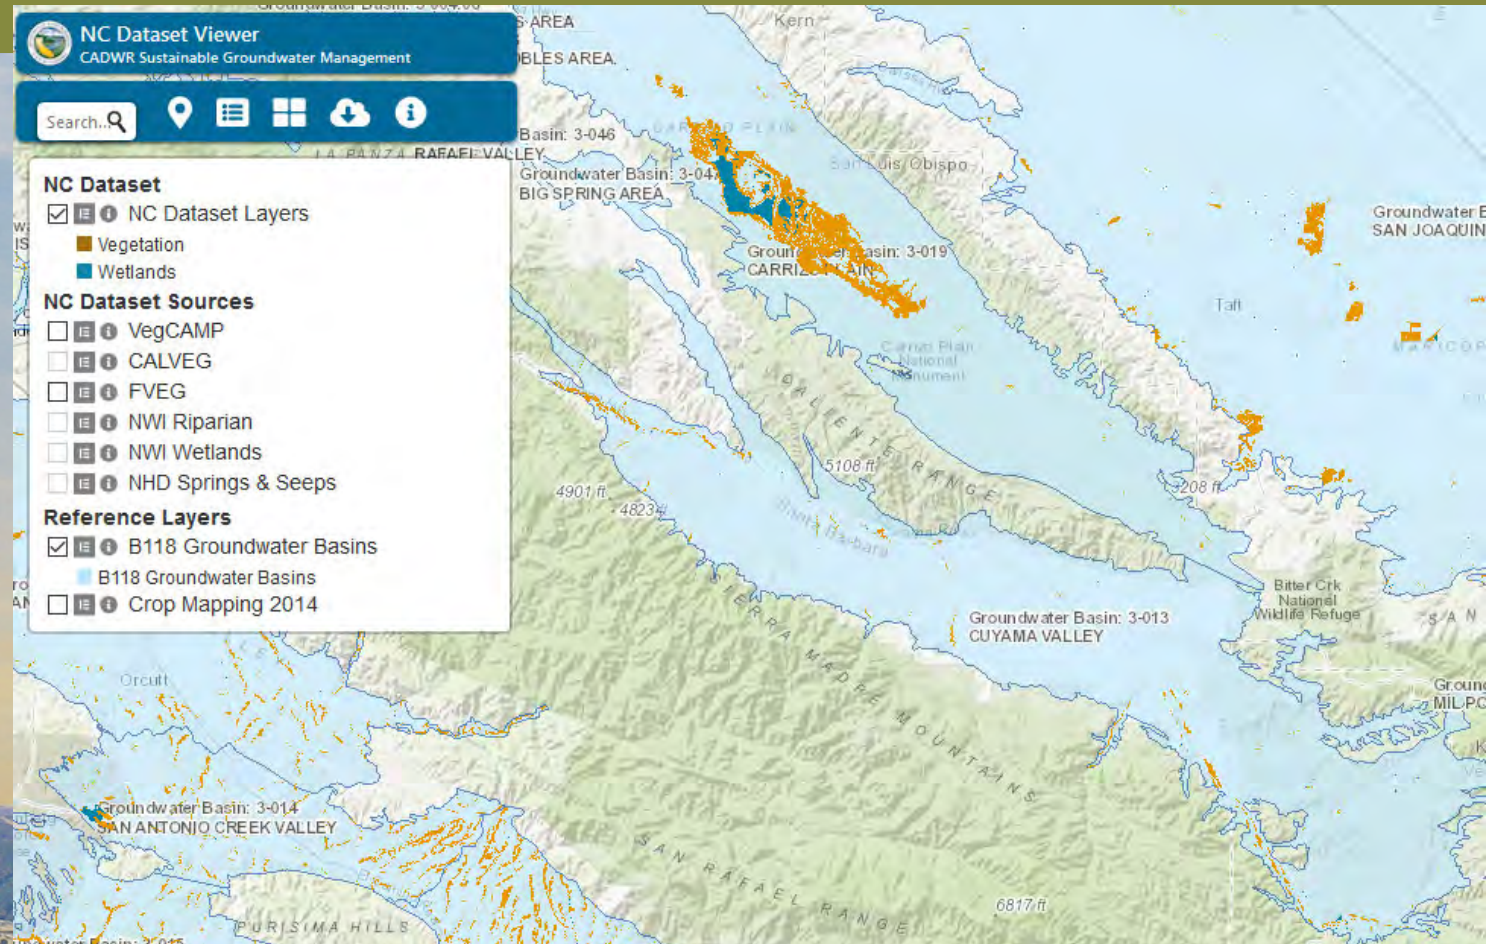


GDEs – Biologist Field Verification

- Remote Sensing
- Field Verification
- Updated NC Dataset




GDEs Identified by Nature Conservancy - Emphasized for Visibility

- Emphasized boundaries to show locations of GDEs
- 2,700 acres
- Primarily along canyons, washes, and near Cuyama River

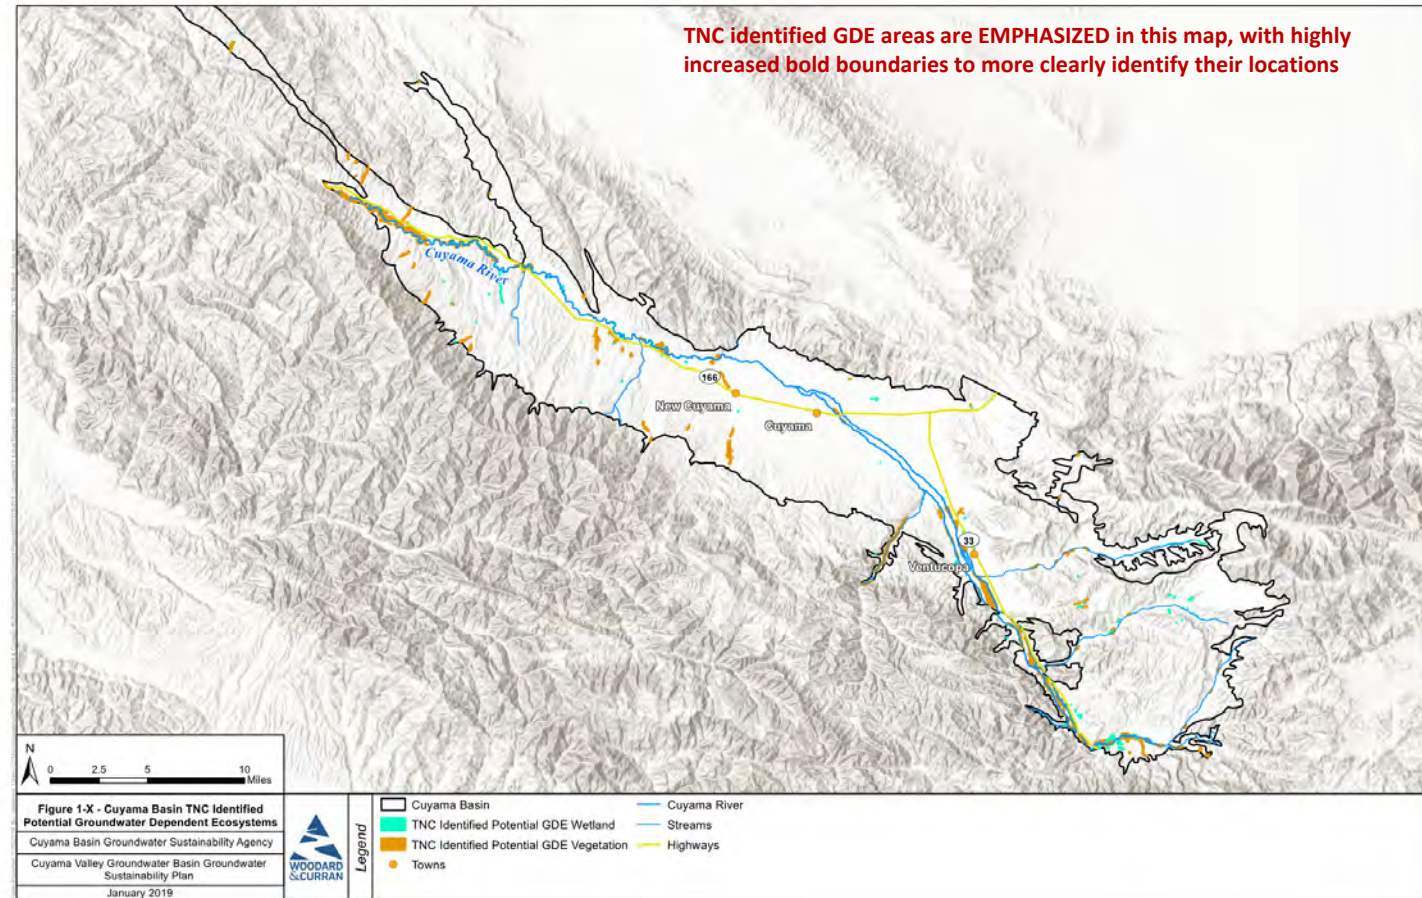


GDEs – Biologist Field Verification

- Points indicate analyzed points in the NC dataset

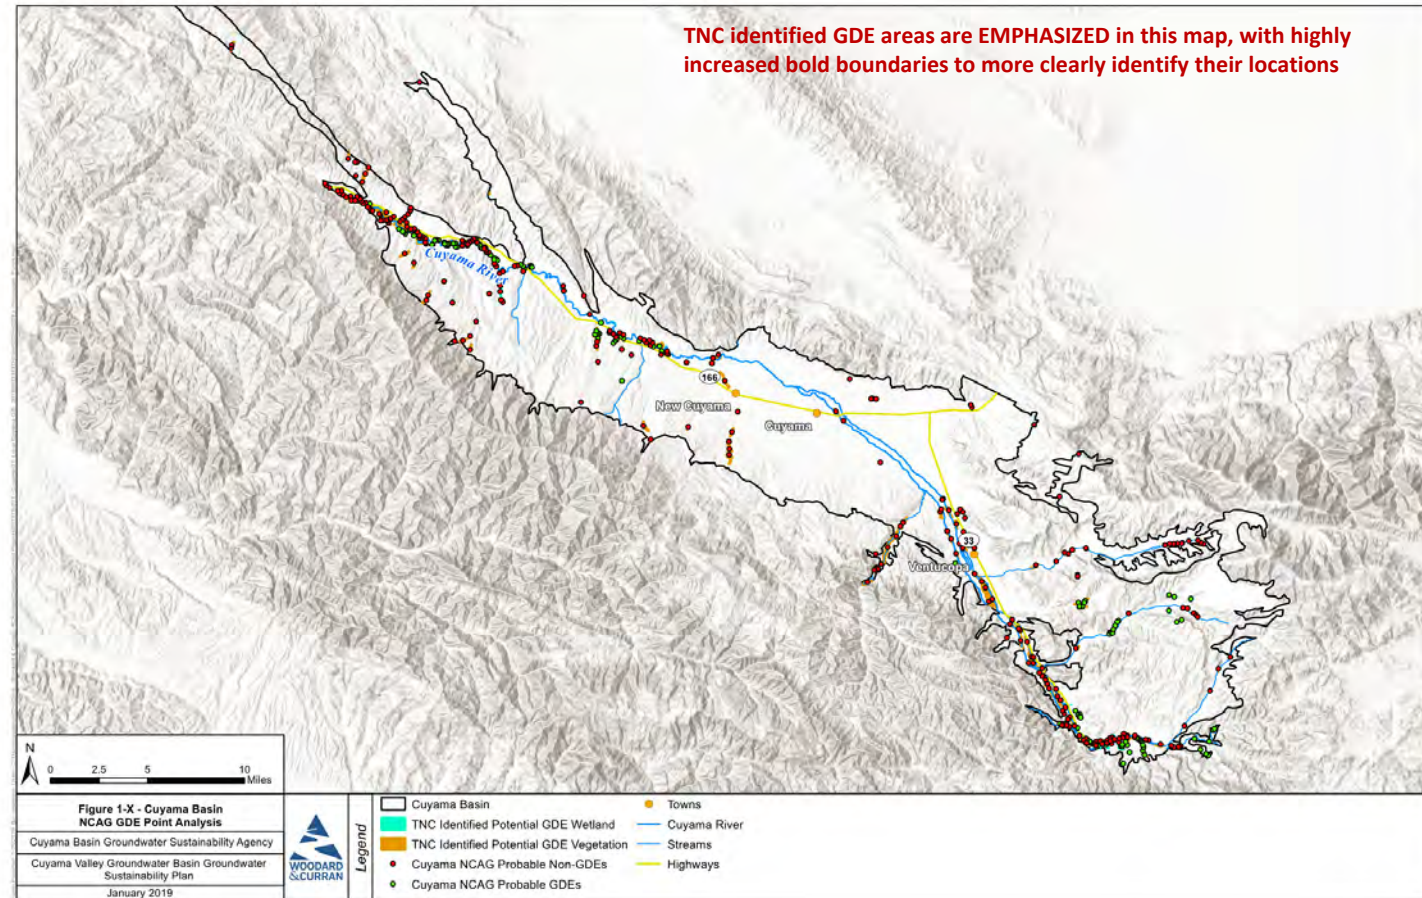


GDEs – Biologist Field Verification

- 2200 Acres removed
- 497 Acres of remaining verified GDEs

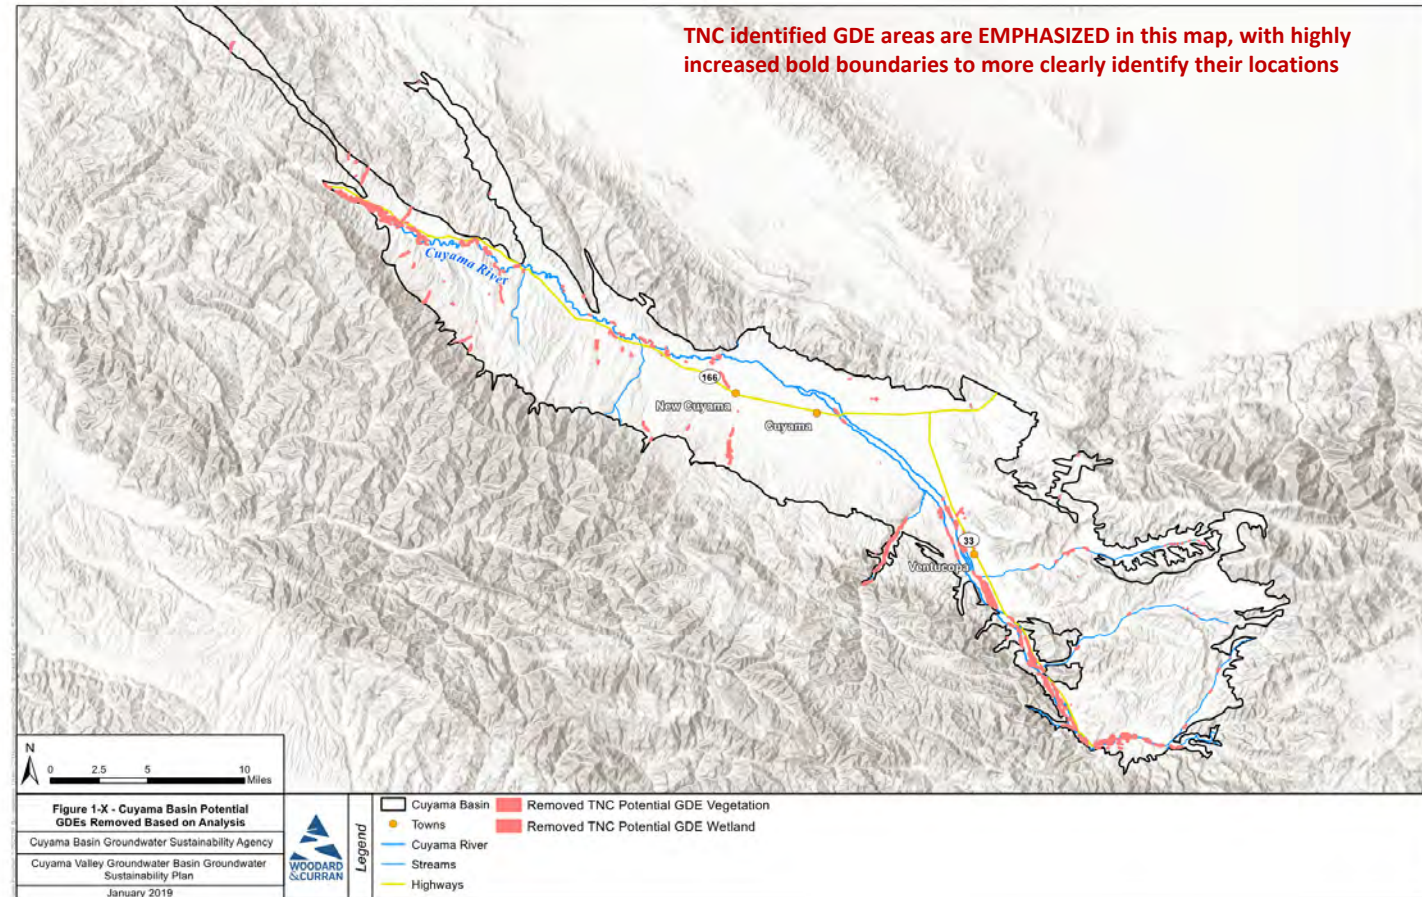


GDEs – Verified

- 497 Acres of verified GDEs
- GDEs occur near the river, and near faults and canyons

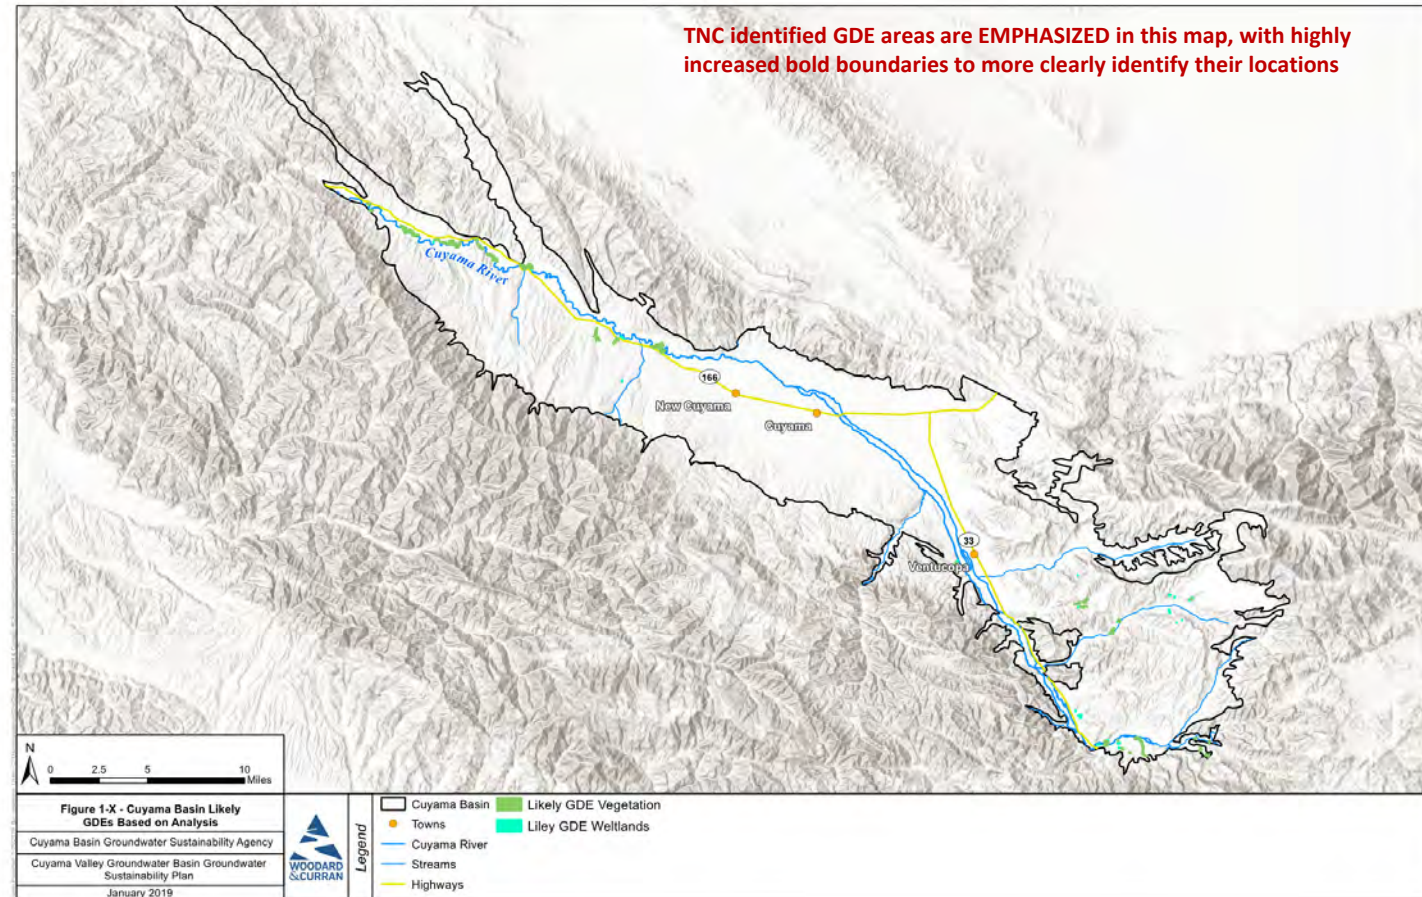

GDEs – Comparison to Regional Monitoring

- Areas where regional monitoring and contouring indicate Depth to Water is over 40 feet

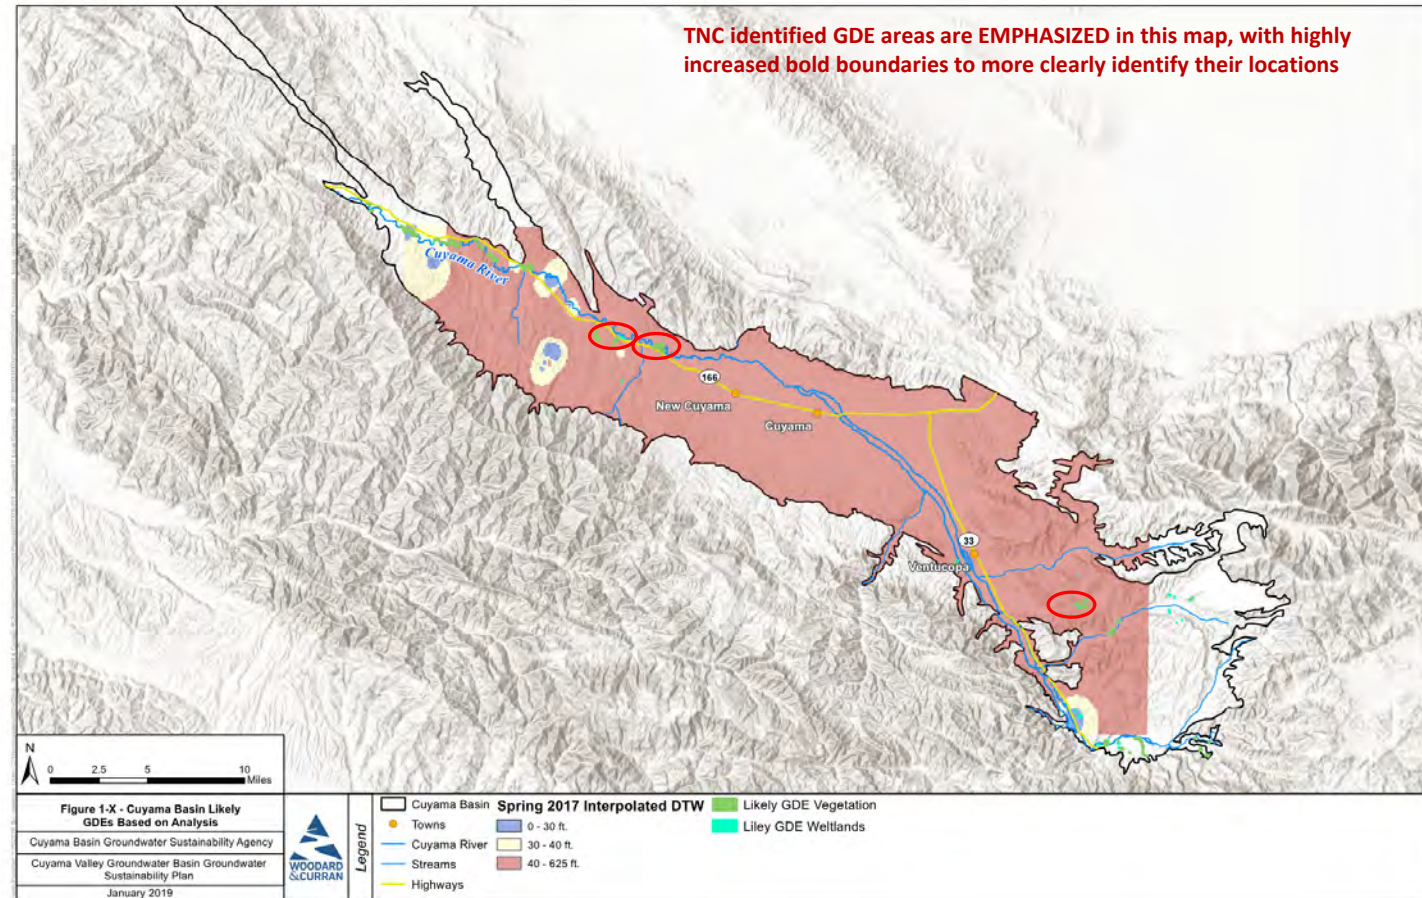

GDEs – Conclusions

- Nature Conservancy dataset is recommended by DWR as basis for evaluation
- Biologist field verified 497 Acres of GDEs
- GDEs occur in canyons and along faults and waterways
- Regional monitoring is not suitable for GDEs
- Recommend installing piezometers as part of monitoring network at representative GDE sites



TO: Board of Directors
Agenda Item No. 7b

FROM: Lyndel Melton, Woodard & Curran

DATE: February 6, 2019

SUBJECT: Monitoring Networks Adoption

Issue

Recommend adoption of the Monitoring Networks section.

Recommended Motion

Adopt the Monitoring Networks section.

Discussion

An overview of the revised Monitoring Networks section is provided as Attachment 1. The comments and responses matrix is provided as Attachment 2, the redline strikeout is provided as Attachment 3, and the revised Monitoring Networks section is provided as Attachment 4.

Cuyama Basin Groundwater Sustainability Agency

Monitoring Networks Chapter Adoption

February 6, 2019



Monitoring Networks GSP Chapter

- Revised GSP Section provided to SAC and Board for review as part of Board Packet on January 25th
- Revised section reflects responses to comments received on September Draft version
- Monitoring Networks section includes:
 - Existing monitoring used
 - Groundwater level and storage monitoring network
 - Degraded water quality monitoring network
 - Land subsidence monitoring network
 - Depletions of interconnected surface water monitoring network (placeholder)
- Seeking approval by CBGSA Board

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
1	Brenton Kelly	Quail Springs Permaculture	General				The Monitoring Networks spatial density around the faults of interest is insufficient.	Comment noted. These areas have been included in the groundwater level data gaps.
2	Brenton Kelly	QSP	General - Well Data with Completion reports				The insufficient Quality Control / Quality Assurance compounds the uncertainty due to the scarcity of data.	Comment noted. Monitoring protocols will be set up to ensure consistent QA/QC for monitoring in the future.
3	Brenton Kelly	QSP	General (Well ID #)				Will any cross reference table for well ID#s be made available?	This can be provided separate from the document.
4	Brenton Kelly	QSP	Global (Salinity)				Please use the term TDS	The text has been changed to note at first usage that salinity is measured in TDS
5	Brenton Kelly	QSP	General				The MN must asses all causal nexus between groundwater quality and groundwater extraction, such as constituents migrating into areas with lower pressure heads due to heavy groundwater extraction.	Comment noted. This can be accomplished in the implementation phase by filling in the monitoring data gaps.
6	Brenton Kelly	QSP	4.2 Basin Conditions (Pg. 4-11)			Fig 4-2 Combined Hydrograph	The text should clearly articulate that groundwater elevations have declined consistently over 500' since pumping started in 1947.	The text has been revised for clarity.
7	Brenton Kelly	QSP	4.3 Existing Monitoring Used (Pg. 4-13)				Other wells that have been monitored by DWR - CASGEM, USGS and/or The Ventura County Watershed Protection District (VCWPD) in the Ventucopa Uplands river corridor should be reconsidered for selection as a monitoring site for the GSP.	Comment noted. Additional wells can be added during the GSP implementation phase.
8	Brenton Kelly	QSP	Table 4-5: Cuyama Basin VCWPD Wells (Pg. 4-22)				Table is mislabeled as; Number of SLOCFC&WCD wells	The table has been corrected.
9	Brenton Kelly	QSP	Table 4-9: Cuyama Basin NWQMC, USGS, IRLP Water Quality Monitoring Sites (Pg. 4-29)				The texts suggests "The NWQMC database provides data on 47 water quality monitoring sites", but the table indicated there are 176 sites.	The text has been revised for clarity.
10	Brenton Kelly	QSP	GAMA / DWR (Pg. 4-31)			age dating and groundwater movement trending	If freshwater recharge is assumed to be happening, then where is it going if not into the productive wells of the area?	Comment noted. This is not relevant to the Monitoring Network section.
11	Brenton Kelly	QSP	4.3.5 Surface Water Monitoring (Pg. 4-37)			Fig 4-14	Not one stream gauge exists on the Cuyama River within the basin. Can we get a Plan to fill this Data Gap? Flow Gauges at the 3 bridges over the Cuyama?	This will be discussed in Section 4.10 when it is developed.
12	Brenton Kelly	QSP	4.5.5 Representative Monitoring (Fig 4-16 thru Fig 4-18)				The major Data Gaps area in Fig 4-18 are also the fault zones of interest and the likely boundaries to proposed Management Areas (or Threshold Regions). What is the plan to solve this uncertainty?	This will need to be addressed during the GSP implementation phase.
13	Brenton Kelly	QSP	4.6 Groundwater Storage Monitoring Network (Pg. 4-53)				All of the data gaps for the groundwater level monitoring network will now compound the uncertainty of the Groundwater Storage calculations. How will calculations made from uncertain data be verified for QA/QC?	Monitoring protocols will be set up to ensure consistent procedures for monitoring in the future.
14	Brenton Kelly	QSP	4.8 Degraded Groundwater Quality Monitoring Network (Pg. 4-53)				The best available science suggests a causal nexus between SGMA related activities like groundwater extraction and the migrations of constituents into areas with lower pressure heads due to unsustainable extraction.(See Appendix A, page 21-29) Boron, Arsenic & Nitrites should be monitored along with age dating to determine the movement of bodies of groundwater and the rates of any freshwater recharge.	The text has been revised to describe the rationale for establishing the monitoring network only for salinity.
15	Brenton Kelly	QSP	4.9 Land Subsidence Monitoring Network (Pg. 4-60)				Is it possible to use other available technologies (like InSAR to match the USGS data set) while we wait for more CGPS installations to come online?	The can be explored by the GSA during the GSP implementation phase.
16	Brenton Kelly	QSP	4.9.5 Monitoring Protocols (Pg. 4-62)			"New stations will require downloading the data as equipment storage..."	Garbled english!	The text has been revised for clarity.
17	Brenton Kelly	QSP	4.10 Depletions of Interconnected Surface Water Monitoring Network (Pg. 4-64)				The last of the Cuyama River Cottonwood trees stand as testament to the depletion of interconnected surface waters. Try to count them before their dead limbs crack and fall to the dry sands of their former wetlands.	Comment noted. No change needed in the Monitoring Network section.
18	Arne Anselm	Ventura County Watershed Protection District	Pg. 4-22				On page 4-22 the first line of the table is incorrect (not SLOCFC&WCD)). It should read VCWPD wells.	The table has been corrected.
19	Arne Anselm	VCWPD	Figure 4-7				The map in Figure 4-7 the title for VC wells in the legend for VCWPD should be more descriptive - Ventura County Watershed Protection District database wells to be consistent with the other maps.	The figure title has been changed.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
20	Cathy Martin	County of San Luis Obispo	Intro			This section was prepared to meet the requirements	Consider listing the GSP regulations for this chapter	The regulation has been added.
21	Cathy Martin	SLO County	4.2 Monitoring Networks Obj.	1	1	This section describes the Cuyama	Consider adding a comment or footnote on seawater intrusion to reinforce why it is not being monitored.	This is discussed in the Undesirable Results GSP Section.
22	Cathy Martin	SLO County	4.2.1 Basin Conditions Relevant	2	3	There are no major stratigraphic aquitards or	Suggest clarifying this sentence. The basin has faults, maybe adding a figure of the Morales Formation.	The text has been revised for clarity. A figure of the Morales Formation is shown in the HCM Section.
23	Cathy Martin	SLO County	4.2.1 Basin Conditions Relevant	2	4	The aquifer ranges from	Consider adding the top and bottom basin range.	The text has been revised for clarity.
24	Cathy Martin	SLO County	4.2.1 Basin Conditions Relevant	3	1	The largest groundwater	Suggest adding a table of the entire basin for land use, square miles, and percentage, such urban, rural, open space, and etc.	This is discussed in the Plan Area section.
25	Cathy Martin	SLO County	4.2.1 Basin Conditions Relevant	4	2	Generally, groundwater elevations	Consider quantifying the decrease in years, such as ... decreasing by approximately XX ft from the 1940s and 1950s to the present	The text has been revised for clarity.
26	Cathy Martin	SLO County	4.2.1 Basin Conditions Relevant	4	2	Generally, groundwater elevations	Suggest verifying if the figure is missing.	The figure is included in the GSP section.
27	Cathy Martin	SLO County	4.3.1 Groundwater Level Monitoring	4	1	CASGEM allows locally	Editorial: "CASGEM allows locally local agencies to be designated"	The text has been revised for clarity.
28	Cathy Martin	SLO County	4.3.1 Groundwater Level Monitoring			There are currently six CASGEM	Clarification - The two SLO County CASGEM wells are volunteer wells (County agreement with private owner)	The text has been revised for clarity.
29	Cathy Martin	SLO County	Figure 4-3			Cuyama Basin DWR/CASGEM Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	These are shown in the Plan Area section and are not needed in this section.
30	Cathy Martin	SLO County	Table 4-2			Cuyama Basin USGS Well Statistics	Suggest verifying if duplicate wells exist between all agencies, such as County, DWR, and USGS.	This is addressed in Section 4.3.2
31	Cathy Martin	SLO County	Figure 4-4			Cuyama Basin USGS Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	These are shown in the Plan Area section and are not needed in this section.
32	Cathy Martin	SLO County	Table 4-3			Cuyama Basin SBCWA Well Statistics	Suggest verifying if duplicate wells exist between all agencies, such as County, DWR, and USGS.	This is addressed in Section 4.3.2
33	Cathy Martin	SLO County	Figure 4-5			Cuyama Basin SBCWA Managed Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	These are shown in the Plan Area section and are not needed in this section.
34	Cathy Martin	SLO County	4.3.1 GW Level Monitoring - SLO	1	2	SLOCFC&WCD also reports the data for	SLO County – the two CASGEM wells are in the County's volunteer program (agreement between the County and owner). If using these 2 wells in the GSP, the CBGSA will need agreements with the owners.	Comment noted. Agreements can be sought during the GSP implementation phase.
35	Cathy Martin	SLO County	Figure 4-6			Cuyama Basin SLOCFC&WCD Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	This is addressed in Section 4.3.2
36	Cathy Martin	SLO County	Figure 4-7			Cuyama Basin VCWPD Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	This is addressed in Section 4.3.2
37	Cathy Martin	SLO County	Figure 4-8			Cuyama Basin Community Services District Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	This is addressed in Section 4.3.2
38	Cathy Martin	SLO County	Figure 4-9			Cuyama Basin Private Landowner Wells	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	This is addressed in Section 4.3.2
39	Cathy Martin	SLO County	4.3.3 GW Quality Monitoring - NWQMC	2	3	Initial water quality data for the Cuyama	Could this data be leveraged for the GSP? If so, please add the regulations pertaining to the IIRLP, such as water quality sampling.	This is included in the monitoring network. Regulations for IRLP program can be found here: https://www.waterboards.ca.gov/centralvalley/water_issues/irrigated_lands/
40	Cathy Martin	SLO County	Multiple figures			Cuyama Basin NWQMC, USGS, IRLP Water Quality Monitoring Sites	Suggest adding the Federal and State areas to the monitoring network to help show why groundwater wells are not located in several basin areas.	These are shown in the Plan Area section and are not needed in this section.
41	Cathy Martin	SLO County	4.3.3 GW Quality Monitoring - Private Landowners	1	1	Private landowners within the	Consider verifying if these owners are in the IRLP, included in GAMA?	Comment noted. This can be done during the GSP implementation phase.

**Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019**

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
42	Cathy Martin	SLO County	4.4 Monitoring Rationales	1	2	Monitoring networks in the Cuyama GSP	Suggest adding – "Cuyama Basin GSP"	The text has been revised for clarity.
43	Cathy Martin	SLO County	4.4 Monitoring Rationales	3	2	The schedule and costs associated	Suggest adding –a period "GSP."	The text has been revised for clarity.
44	Cathy Martin	SLO County	Table 4.13			Number of Wells Selected for Monitoring Network	SBCWA - Suggesting verifying that well are not being counted twice between agencies and verifying that the programs are continuing, if leverage existing programs	The table has been updated to note that the total does not equal the sum of the rows due to wells being duplicated in multiple databases.
45	Cathy Martin	SLO County	Table 4.13			Number of Wells Selected for Monitoring Network	SLOCFC&WCD - Clarification - The two SLO County CASGEM wells are volunteer wells (County agreement with owner), not monitoring wells. The CBGSA will need agreements with the well owners for additional sampling beyond CASGEM	Comment noted. No change needed to text.
46	Cathy Martin	SLO County	4.5.3 Monitoring Frequency	5	1	The Basin is an unconfined aquifer	Where did the 5 inches per year come from?	"5-inches" is based on values provided in Table 4-14, which is from the <i>Monitoring Networks and Identification of Data Gaps Best Management Practices</i> . "5-inches" refers to the quantitative value of annual recharge. This value is output from the model, which currently models an annual recharge of # inches. Although this value is subject to change based on model calibration efforts, it is not expect to increase above 5-inches per year.
47	Cathy Martin	SLO County	4.5.3 Monitoring Frequency	5	2	Based on the data in Table 4-14	Suggest that the CBGSA Board review the consultant economic benefit cost analysis on monthly, quarterly, and semi-annual groundwater sampling to determine what is feasible? Suggest the Consultant reviews the sampling timeframe with the CBGSA Board.	Comment noted. The specific time frame will need to be selected by the CBGSA Board going forward.
48	Cathy Martin	SLO County	4.5.4 Spatial Density	3		Based on Hopkins well density	Suggest adding reference	The reference has been added to the text.
49	Cathy Martin	SLO County	4.5.4 Spatial Density	3		Based on Heath	Suggest adding reference	The reference has been added to the text in the section and to the references at the end of the section.
50	Cathy Martin	SLO County	4.5.6 GW Level Monitoring Network	1	1	The Groundwater Level Monitoring Network	Suggesting verifying that well are not being counted twice between agencies and verifying that the programs are continuing, if leverage existing programs.	Entities with current monitoring programs were attempted to be contacted. Of those that responded to our inquiries, most were non-committal with the continuation of their programs, however, this non-committal response was a result of not knowing specifics about the wells in Cuyama and not wanting to be responsible for misinformation. This is also why criteria for inclusion in the monitoring network is so broad. In the event some wells are discontinued, it is the hope that other wells will be able to provide sufficient data. If this is not the case, the GSA will have to determine if additional wells will need to be constructed. A review of the monitoring network was conducted and no duplicates were found. Wells that appear in Figure 4-17: Cuyama GW Basin Groundwater level and Storage Monitoring Network Wells that have multiple labels for what appears to be the same site are actually multi-completion (aka multi-depth) wells. Each individual casing is considered an independent well due to the output of GWL measurements. Note: Due to revisions to the Monitoring Network and Representative Wells through Board direction, the Table and List of wells has been updated.
51	Cathy Martin	SLO County	4.5.6 GW Level Monitoring Network	1	1	The Groundwater Level Monitoring Network	Does the CBGSA have to form agreements with the well owners for volunteer programs?	Yes, this will need to be done going forward during the GSP implementation phase.
52	Cathy Martin	SLO County	4.5.6 GW Level Monitoring Network	3	1	The proposed monitoring frequency	Suggest that the CBGSA Board review the consultant economic benefit cost analysis on monthly, quarterly, and semi-annual groundwater sampling to determine what is feasible? Suggest the Consultant reviews the sampling timeframe with the CBGSA Board.	Comment noted. The specific time frame will need to be selected by the CBGSA Board going forward.
53	Cathy Martin	SLO County	Appendix K	1	1	General	Suggesting verifying that this follows SGMA GSP protocols.	Appendix K is <i>Best Management Practices for the Sustainable Management of Groundwater Monitoring Protocols, Standards, and Sites</i> published by DWR and provided on the SGMA website.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
54	Cathy Martin	SLO County	4.5.8 Data Gaps	3	1	Well construction information is not	Suggesting verifying if there is a SGMA GSP standard for well construction. If so, does this monitoring network meet these standards?	Article 3, Section 352.4, (c) describes the standards to apply to the wells. Although it outlines the information that should be included under Part (1), Part (2) states that either the GSA create a schedule for acquiring the necessary information, or describe why the information is not necessary to understand and manage groundwater in the basin. Due to the extremely limited amount of data within the Cuyama Basin, an attempt to use all valuable data was made. To understand the limitations of the data, the Tiering System was utilized and discussed within the section. Additionally, within Project and Management Actions, there will be additional information about pursuing projects to obtain additional well information.
55	Cathy Martin	SLO County	4.5.9 Plan to fill data gaps	3	3	New wells drilled by DWR's	Suggest updating this section when DWR approves the TSS for new wells	Comment noted. This will be considered if DWR approves the TSS before completion of the GSP.
56	Cathy Martin	SLO County	4.8 Degraded GW Quality	1	1	Due to the relationship of undesirable	This needs to be vetted by the CBGSA Board for any constituent to be monitored and sampled. Is sampling for salinity meeting SGMA GSP regulations? Suggest providing a discuss of why other constituent are not being monitored	The text has been revised to describe the rationale for establishing the monitoring network only for salinity.
57	Cathy Martin	SLO County	4.8.2 Monitoring Sites Selected	1	4	Note that due to duplication of wells	Consider updating the table (4-17) with the correct values.	The table has been updated.
58	Cathy Martin	SLO County	4.8.3 Monitoring Frequency	2	3	The Basin, in coordination	This needs to be vetted by the CBGSA Board for any constituent to be monitored, sampled, and frequency of sampling.	Comment noted. The specific time frame will need to be selected by the CBGSA Board going forward.
59	Cathy Martin	SLO County	4.8.6 GW Quality Monitoring Network	1	3	All 64 wells are representative	Suggest verifying if these are duplicate wells and if leveraging data from existing programs to verify that the program is continuing.	Comment noted. This will be done during the implementation phase going forward.
60	Cathy Martin	SLO County	4.8.8 Data Gaps	4	3	All management entities are	Suggest verifying that this assumption is true	The text has been revised for clarity.
61	Cathy Martin	SLO County	4.8.9 Plan to fill data gaps	3	2	Downhole video logging	Suggest verifying that you can perform downhole video logging in existing wells with casings.	This will be verified as specific wells are identified for video logging by the DWR TSS.
62	Cathy Martin	SLO County	4.9.7 Plan to fill data gaps	1	3	Although there are multiple	Suggest reviewing the pros/cons and cost associated with recommendation	The rationale for this recommendation is provided in the text.
63	Matt Y., Matt S., & Fray C.	Santa Barbara County Water Agency	General				It is quite difficult to determine the appropriateness of the proposed monitoring network without know what the management areas will be. Suggest revising/recirculating once they have been identified.	Comment noted. This can be considered by the GSA Board.
64	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4.1			Well completion diagram	Depth to Bottom of Well should/could be reworded to match the what is written under useful terms - Total Well Depth	Updated Figure
65	Matt Y., Matt S., & Fray C.	SBCWA	4.1 Useful Terms			Subsidence (refer to appendix Z	Suggest deleting appendix Z for reasons described in comments to Groundwater Conditions Section	Comment noted. The appendix is included because some readers are interested in this content.
66	Matt Y., Matt S., & Fray C.	SBCWA	4.2.1 Basin Conditions Relevant	2	3	There are no major stratigraphic aquitards	Fault lines?	The text has been revised for clarity.
67	Matt Y., Matt S., & Fray C.	SBCWA	4.2.1 Basin Conditions Relevant	2		The aquifer ranges from 10's to 100's of feet	Not a very useful, give #s.	Specific values are unavailable in this summary sentence. Therefore, numbers have been removed. For details on aquifer thickness, refer to the HCM section.
68	Matt Y., Matt S., & Fray C.	SBCWA	4.2.1 Basin Conditions Relevant	2		Median reported hydraulic	Median or a range?	Median, as shown in Table 2.1-1.
69	Matt Y., Matt S., & Fray C.	SBCWA	4.2.1 Basin Conditions Relevant	2		Figure 2.1-2 shows the extent	Do we have that?	This figure is in the HCM section.
70	Matt Y., Matt S., & Fray C.	SBCWA	4.2.1 Basin Conditions Relevant	3		Based on the most recent data from 2016,	Sentence is somewhat confusing.	The text has been revised for clarity.
71	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-2			Central Basin with Combined	Label wells on map	The figure has too many wells to effectively label them.
72	Matt Y., Matt S., & Fray C.	SBCWA	4.3 Existing Monitoring Used	1	1	This section discusses current groundwater	As mentioned in comments to the groundwater conditions section, this is a list of databases from which W&C pulled data, it is not a list of monitoring programs.	The text has been revised for clarity.
73	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring				I like how each monitoring entity is mentioned in a separate section below. A general summary of how these data were collected should be included for each entity to include information such as: 1-protocols 2-accuracy 3-equipment used 4-QA/QC	Users can refer to the metadata provided by each data source for this information. This level of detail is not needed in this GSP section.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
74	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - DWR, Statewide...			CASGEM Wells – Wells with well	Many of the voluntary wells have publically available well construction info. This distinction is not correct.	The text has been revised for clarity.
75	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - DWR, Statewide...			Most wells were measured on a semi-annual	This is not correct, most wells are measured annually. Some were measured semi-annually during the USGS study.	The text has been revised for clarity.
76	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-1			Summary Statistics for CASGEM Wells	No CASGEM program in 1946. It started in 2000. No big deal. These wells are now CASGEM.	The table header has been revised for clarity.
77	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-3			Cuyama Basin DWR/CASGEM	As commented on the groundwater conditions section, these are not DWR wells.	The figure title has been changed.
78	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - USGS	5	1	USGS has approximately 25 approved	Needs to be much clearer. USGS doesn't "have" these wells. They happen to appear in the USGS database.	The text has been revised for clarity.
79	Matt Y., Matt S., & Fray C.	SBCWA	Table 4.2			Cuyama Basin USGS Well Statistics	# of provisional wells - This is unclear. There may be some provisional data from the last few months that re currently not approved. Standard to approve data within 150 days. This statement leads one to believe that these data are not useable.	The distinction between provisional and approved USGS wells has been removed.
80	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-4			Cuyama Basin USGS Wells	These are not USGS wells. They are wells that are in the USGS database.	The text has been revised for clarity.
81	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - SBCWA	1	1	The Santa Barbara County Water Agency (SBCWA) manages	Summary of SBCWA monitoring programs: USGS network for entire basin was 32 wells. •About 14 of these 32 wells are overlapped on the west-end with our quarterly network. •Our quarterly network is 36 wells but could be considered as large as 47 if we want to count the Harvard production wells which they self-monitor and we periodically verify. •Mandatory CASGEM is 3 and Voluntary CASGEM is 13. These are also part of the USGS total of 32 wells. • The USGS has stopped monitoring wells in the basin. The entire network we will start to monitor will be about 52 in total (or 63 if we want to consider the 11 Harvard production wells).	Text and Table has been updated
82	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - SBCWA	1	3	Many of these wells are included in the DWR	I didn't see any in the DWR database. Some are in NWIS. Important to clarify that wells may be in database and maps, but our data for the last couple of years is not located in the database.	Unecessary detail removed from document
83	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-3			Number of SBCWA-wells	29 should be 55	Numbers reflect data provided by SBCWA. Numbers have been updated to reflect this.
84	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-3			Number of SBCWA wells included in the Monitoring Network	30 is ?	Numbers have been updated.
85	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-5			Cuyama Basin SBCWA	As mentioned, this does not include all the wells monitored by SBCWA	Figure has been updated
86	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - Private Landowners	1	1	Private landowners within the Basin	Nearly all the wells mentioned previously are owned and "managed" by private landowners. The terminology is very confusing.	The text has been revised for clarity.
87	Matt Y., Matt S., & Fray C.	SBCWA	4.3.1 Groundwater Level Monitoring - Private Landowners	1	3	Summary statistics for these	Are these private wells that are measured by USGS, Ventura, SLO, and SBCWA? Or are these overlap wells found in separate databases? Hard to tell without shapefiles. If there are 99 wells measured by private landowners, there would a serious issue with data quality and accuracy and should not be the foundation of the model.	The text has been clarified to note that these are additional wells beyond those included in the previously described datasets.
88	Matt Y., Matt S., & Fray C.	SBCWA	4.3.2 Overlapping and Duplicate Data	2	1	Duplicates were identified and then	Were similar MP elevations, accuracy standards, and methodology used?	Well data was not altered during this duplicate identification processing. Sources were either combined (i.e. one source had GSE and another had RPE) or the source with the more accurate information was utilized (i.e. once dsource only had ID and general coordinates whereas another may have had well construction info and general coordinates). Sources where there were conflicting data, such as Well Depth, were addressed one by one and researched and professional determination was made. All elevation values were ultimately corrected using a singular DEM dataset to standardize all elevation values.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
89	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-8			MSC column	Explain how Local Name is different from Name? Explain how is USGS ID different from MSC?	Some wells had two names. For example, OPTI Well 834 has a state well number, a well name of "Mustang Production" and local well name of "Spanish WM-1". In an effort to include as much well information as possible "two" well name categories were included. The USGS ID and MSC are two unique identification serial numbers. For example, OPTI well 134 has a SWN of 07N23W20M001S and a USGS Site Code of 344115119202001.
90	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-8			SBCWA row	The table needs to include all SBCWA-monitored wells, which includes all of the CASGEM Wells in the basin within SB County.	Data provided by the SBCWA in individual spreadsheets did not include CASGEM ID, and thus a check mark was not included in the CASGEM ID column for the SBCWA row in Table 4-8. Table 4-8 is intended to show what information was included in the original data provided to W&C to illustrate the necessity of finding duplicates and data processing. Although those wells may have CASGEM IDs, these were associated with the wells during data processing.
91	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-8			Managing Entity column	Change heading to Database	The heading has been changed to "Data Maintaining Entity"
92	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring	1	1	This section discusses existing groundwater	Confusingly worded – the programs were "collected"?	The text has been revised for clarity.
93	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - NWQMC				Why is NWIS not mentioned?extensive water quality data available.	The data downloaded from the NWQMC includes NWIS data. The text has been revised for clarification.
94	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - NWQMC				What sample constituents and parameters?	Text has been edited for clarity.
95	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - NWQMC	2	3	IRLP was initiated in 2003	Are these data collected by the landowner? Explain in text who does this data collection?	Who collects this data is unknown and not included in the data provided by the management entities
96	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-9			Median period of record	Is this accurate?	Yes. A considerable number of sites only took 1-2 samples during a single year.
97	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - GAMA/DWR				Explain in text what sample constituents and parameters.	Clarification has been added to the text, detail about constituents was not added due to nexus of causality in water quality result.
98	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - GAMA/DWR			Earliest measurement date year	GAMA started in 2000 Many of these data are historic USGS data from NWIS. The database W&C pulled the data from is not indicative of what program or agency collected the data.	While this comment is correct, the intent of this section is to summarize the data that is available, and was downloaded, and could be downloaded, from each of these sources and to show the processes W&C took to processes and collect data for the Cuyama Basin.
99	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - Ventura County Watershed				Need to add a section on the CSD.	A new section has been added to include data provided by the CSD.
100	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - Ventura County Watershed				What sample constituents and parameters?	Clarification has been added to the text, detail about constituents was not added due to nexus of causality in water quality result.
101	Matt Y., Matt S., & Fray C.	SBCWA	4.3.3 GW Quality Monitoring - Private Landowners				What sample constituents and parameters?	The text addresses that only TDS is utilized by this data source.
102	Matt Y., Matt S., & Fray C.	SBCWA	4.3.4 Subsidence Monitoring			Appendix Z, a subsidence white	As commented on groundwater conditions section, suggest deleting this white paper.	Comment noted. The appendix is included because some readers are interested in this content.
103	Matt Y., Matt S., & Fray C.	SBCWA	4.3.5 Surface Water Monitoring				Perhaps assess whether there is more needed? Where?	This will be addressed in Section 4.10
104	Matt Y., Matt S., & Fray C.	SBCWA	4.4 Monitoring Rationales	2	1	The monitoring networks were	Be specific - levels? Storage?	The text has been revised for clarity.
105	Matt Y., Matt S., & Fray C.	SBCWA	4.5.2 Monitoring Wells Selected for Monitoring Network				SBCWA knows of currently available wells to fill these data gaps for monitoring. Also, a few wells, which are also currently available, should be monitored in the Ventucopa Uplands and east uplands. We don't need the network density here, but maintaining a baseline dataset is important. It is unwise to completely overlook these areas because there's currently little to no and use. Please contact Matt Scrudato for information on wells available	Comment noted. In the GSP implementation phase, the GSA should coordinate with SBCWA staff to identify appropriate wells to fill data gaps.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
106	Matt Y., Matt S., & Fray C.	SBCWA	4.5.2 Monitoring Wells Selected for Monitoring Network	2	1	Tier 1 encompasses wells with the most	Are there any in the Basin? None show up on the figure	No, there are no Tier 1 wells in the Basin.
107	Matt Y., Matt S., & Fray C.	SBCWA	4.5.2 Monitoring Wells Selected for Monitoring Network			Table 4-13 & following paragraph	This is not useful and unnecessarily confusing due to the overlap between the top three monitoring groups. The database that W&C found the well in is irrelevant.	The paragraph has been removed.
108	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-16			Cuyama Basin Groundwater Level and Storage Monitoring	No Tier 1 Wells?	No, there are no Tier 1 wells in the Basin.
109	Matt Y., Matt S., & Fray C.	SBCWA	4.5.3 Monitoring Frequency	5	1	The Basin is an unconfined aquifer	Large withdrawals are not consistent across the basin. Mention where the large withdrawals occur.	The text has been revised for clarity.
110	Matt Y., Matt S., & Fray C.	SBCWA	4.5.3 Monitoring Frequency	5	2	Based on the data in Table 4-14	If there are management areas, may not need monthly monitoring this across all areas. A good reason to wait until MAs have been decided.	Comment noted. This can potentially be updated in the Public Draft if the GSA Board provides direction on management areas.
111	Matt Y., Matt S., & Fray C.	SBCWA	4.5.4 Spatial Density				Should be done by management area.	The monitoring wells correspond to the wells used to develop thresholds, which have been selected by threshold region.
112	Matt Y., Matt S., & Fray C.	SBCWA	4.5.4 Spatial Density	1	5	Monitoring wells in close proximity	Many of the wells in the basin are themselves pumped. There are very few dedicated monitoring wells.	Comment noted. No change needed to text.
113	Matt Y., Matt S., & Fray C.	SBCWA	4.5.5 Representative Monitoring				The GSA will need access agreements with private landowners to monitor nearly all of these wells. These ability to get these agreements may drastically alter which wells are selected.	Comment noted. No change needed to text.
114	Matt Y., Matt S., & Fray C.	SBCWA	4.5.5 Representative Monitoring			Monitoring Well – Other wells are	"Supplemental wells" may be a less confusing description.	The text has been changed accordingly.
115	Matt Y., Matt S., & Fray C.	SBCWA	4.5.5 Representative Monitoring			Adequate Spatial Distribution – Representative monitoring	Awkward phrasing, please restate for clarity	The text has been revised for clarity.
116	Matt Y., Matt S., & Fray C.	SBCWA	4.5.6 GW Level Monitoring Network	1	1	The Groundwater Level Monitoring Network is comprised	Sum of Table 4.13 is 151 wells. Not useful.	Paragraph was removed.
117	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-16			Column: Managing Agency as of 2018	These are not the managing agency. This is the database W&C pulled the data from	The column has been renamed "Data Maintaining Agency"
118	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-16			OPTI ID	Add Bittercreek. Appears to be a discrepancy between managing agency mentioned here and monitoring agency mentioned on the OPTI webpage.	We are unclear what "Add Bittercreek" means. With more clarification, we can make a change in the Public Draft.
119	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-16			2* SB County	This well appears to be located in Ventura in OPTI	Table has been updated
120	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-16			105 - confidential	This data is published in NWIS. Not confidential. Depth of well 600 feet. Depth of hole 750 feet.	The table has been updated.
121	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-16			109	Plots in the ocean near Channel Islands.	Data provided to W&C was plotted in the Ocean. This well has been removed, and the correct well/lat/long was added to the network as OPTI Well 833
122	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-16			120	Collapsed well. Not a good choice.	Data provided to W&C did not indicate the well was collapsed. Instances like recent collapses that happened after data collection will be addressed in the GSP implementation phase.
123	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-17			Groundwater Level and Storage Representative	Big data gaps in this map. SBCWA can assist in providing better spatial coverage.	Comment noted. In the GSP implementation phase, the GSA should coordinate with SBCWA staff to identify appropriate wells to fill data gaps.
124	Matt Y., Matt S., & Fray C.	SBCWA	4.5.7 Monitoring Protocols	1	1		LSD accuracy standard? What is the required accuracy for the WL data? May want to refer to USGS publication Groundwater Technical Procedures of the USGS if this is the required standard. https://pubs.er.usgs.gov/publication/tm1A1	As mentioned before about Appendix K (<i>Best Management Practices for the Sustainable Management of Groundwater Monitoring Protocols, Standards, and Sites</i>) the GSP cites DWRs published material for sampling protocols.
125	Matt Y., Matt S., & Fray C.	SBCWA	4.5.7 Monitoring Protocols	1	1	Monitoring protocols for the groundwater	The attached appendix is titled Appendix A.	The text has been revised for clarity.
126	Matt Y., Matt S., & Fray C.	SBCWA	4.5.8 Data Gaps	1	1	Groundwater levels monitoring data gaps	awk - delete sentence and 2 bullet points below	The text has been revised for clarity.
127	Matt Y., Matt S., & Fray C.	SBCWA	4.5.9 Plan to fill data gaps	2	1	The CBGSA has already been	Provide context (Proposition 1, etc)	The text has been revised for clarity.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
128	Matt Y., Matt S., & Fray C.	SBCWA	4.5.9 Plan to fill data gaps	2	2	This task includes identification	Explain where? Why? What will this illustrate and how will it help? Better than discrete monthly measurements?	The text has been revised for clarity.
129	Matt Y., Matt S., & Fray C.	SBCWA	4.5.9 Plan to fill data gaps	3	1	DWR provides Technical Support Services (TSS) to	This needs context and has no basin-specific info.	The text has been revised for clarity.
130	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-18			Groundwater Levels Monitoring Network	See Figures 4.10 and 4-4. There appear to be wells available to fill data gaps. CVCR6 RRU1 and 2	Comment noted. W&C will coordinate with SBCWA staff to identify appropriate wells to fill data gaps.
131	Matt Y., Matt S., & Fray C.	SBCWA	4.8 Degraded GW Quality	1	1	Due to the relationship of undesirable	Elaborate. This need a lot more justification. Why only salinity? What is the standard? What would cause this to change? No other parameters needed at all?	The text has been revised to describe the rationale for establishing the monitoring network only for salinity.
132	Matt Y., Matt S., & Fray C.	SBCWA	4.8.2 Monitoring Sites Selected				Too many in North Fork. Large data gaps. No west end monitoring? Poor distribution when other wells are available.	The monitoring network identified in the document only includes wells that are currently being monitored for salinity. Wells for filling the data gaps identified in the document will be identified in the future during GSP implementation.
133	Matt Y., Matt S., & Fray C.	SBCWA	4.8.2 Monitoring Sites Selected	1	4	Note that due to duplication of wells	Why show this if there are overlaps? What value does it add?	It identifies the role that these entities currently play in managing and maintaining water quality data in the Basin.
134	Matt Y., Matt S., & Fray C.	SBCWA	4.8.3 Monitoring Frequency	1	1	Monitoring agencies such the USGS	USGS always in July, except during the recent basin study. They collect these samples for the SBCWA. The SBCWA will likely discontinue this program once the GSP is submitted.	Text has been edited for clarity. Text reflects the conversation with USGS staff and W&C.
135	Matt Y., Matt S., & Fray C.	SBCWA	4.8.3 Monitoring Frequency	1		Monitoring agencies such the USGS (entire paragraph)	This is irrelevant. Explain what the GSA is going to do first, then explain how it will leverage samples collected by other agencies.	The text has been revised for clarity.
136	Matt Y., Matt S., & Fray C.	SBCWA	4.8.3 Monitoring Frequency	2	2	The Basin, in coordination with partnering	This should come first	The text has been revised for clarity.
137	Matt Y., Matt S., & Fray C.	SBCWA	4.8.3 Monitoring Frequency	2	2	Representative wells, those with sufficient	Not necessary, it was already stated that all are representative wells.	The text has been revised for clarity.
138	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-18			Managing Agency as of 2018	See previous comment.	The text has been revised for clarity.
139	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-18			Department of Water Resources	Wells 710-758 are DWR. This managing agency should stay consistent and use DWR.	The table has been revised for clarity.
140	Matt Y., Matt S., & Fray C.	SBCWA	Table 4-18			Last Measurement Date	Many of these are from the USGS Study, not part of a regular monitoring program. There is no "managing entity as of 2018".	"Managing entity" has been changed to "Data Maintaining Agency"
141	Matt Y., Matt S., & Fray C.	SBCWA	4.8.7 Monitoring Protocols			Existing groundwater quality monitoring	Irrelevant. GSA will be establishing its own network and using its own protocols. Existing programs may not continue.	The text has been revised for clarity.
142	Matt Y., Matt S., & Fray C.	SBCWA	4.8.8 Data Gaps	3		Additional information about how	Use the three wells completed at different depths.	Comment noted. This can be considered during the GSP implementation phase.
143	Matt Y., Matt S., & Fray C.	SBCWA	4.8.8 Data Gaps	4	1	The entire Basin is identified as	??? The basin is the data gap?? Please restate to explain what data is missing.	The text has been revised for clarity.
144	Matt Y., Matt S., & Fray C.	SBCWA	4.8.9 Plan to fill data gaps	1	1	The CBGSA will fill the temporal	Explain (DWR's TSS program. to perform downhole logging....)	The text has been revised for clarity.
145	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-20				Wells are available. SBCWA can help find them. SBCWA are actually measuring them and collecting water quality samples.	Comment noted. The GSA can coordinate with SBCWA to incorporate these wells during the GSP implementation phase.
146	Matt Y., Matt S., & Fray C.	SBCWA	4.9.3 Monitoring Frequency	1	1	Subsidence monitoring frequencies should capture	State clearly in the beginning of the section what the GSA will do.	The text has been revised for clarity.
147	Matt Y., Matt S., & Fray C.	SBCWA	4.9.4 Spatial Density	1	1	The current spatial density of subsidence	With 2 stations within the basin as mentioned in 4.9-2?	Yes, this is based on the 2 stations currently in the Basin.
148	Matt Y., Matt S., & Fray C.	SBCWA	Figure 4-21			Current Subsidence Monitoring	Legend does not include symbols for the sites.	Stations are labeled on map, and thus are not needed in the legend.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
149	Matt Y., Matt S., & Fray C.	SBCWA	4.9.5 Monitoring Protocols				<p>Is there equipment calibration needed? There needs to be a written standard. This needs to be elaborated on.</p> <p>There are some standards already developed which may be useful as a guide and reference. These are as follows: (for GNSS surveys) USGS- https://pubs.usgs.gov/tm/11d1/tm11-D1.pdf NOAA https://www.ngs.noaa.gov/PUBS_LIB/NGS-58.html https://www.ngs.noaa.gov/PUBS_LIB/NGS592008069FINAL2.pdf USGS reports have information about "future monitoring" which may be a useful reference when establishing the standards and protocols. Here's an example: https://pubs.usgs.gov/sir/2014/5075/pdf/sir2014-5075.pdf</p>	Comment noted. This can be considered during the GSP implementation phase.
150	Matt Y., Matt S., & Fray C.	SBCWA	4.9.5 Monitoring Protocols	2	1	Data should be saved on	Where? Central database?	The text has been revised for clarity.
151	Matt Y., Matt S., & Fray C.	SBCWA	4.9.7 Plan to fill data gaps				Should we create a baseline dataset set now since it may take time to establish permanent sites? DGPS biannually?	Comment noted. This can be considered during the GSP implementation phase.
152	Matt Y., Matt S., & Fray C.	SBCWA	4.9.7 Plan to fill data gaps	2	1	Theses stations can be managed	Why USGS? Are they running the current stations or have we determined that they will do this monitoring? If so, M Sneed (USGS) should elaborate on the protocols and methodology.	Comment noted. This can be considered during the GSP implementation phase.
153	EKI	Cuyama Basin Water District	General				Representativeness of wells for water level monitoring. Wells used within a monitoring network must not only meet standards for sufficient well construction and monitoring data, they also must be representative of local hydrogeologic conditions. "The designation of a representative monitoring site shall be supported by adequate evidence demonstrating that the site reflects general conditions in the area." [§ 354.36(c)]. The process for selecting candidate wells for the water level Monitoring Network is explained based on well construction and monitoring frequency criteria, but the chapter is unclear on how selected wells were determined to be representative of certain areas of the basin.	Comment noted. These factors can be considered when the monitoring network is finalized during the GSP implementation phase.
154	EKI	CBWD	General				Representativeness of wells for water quality monitoring. The process used to select wells as representative for water quality monitoring also is not transparent. All available wells apparently were included in the water quality Monitoring Network, but this section (e.g., Page 4-54) lacks discussion of basin groundwater quality characteristics. A Piper diagram with data from all wells, or maps with well-by-well Stiff diagrams could highlight spatial differences (and redundancies) in water quality. If only TDS data are available, a figure showing side-by-side historical TDS data boxplots for all wells would allow identification of wells with statistically-distinct (or redundant) historical data.	Comment noted. The available water quality data is discussed in the Groundwater Conditions chapter. This level of detail is not needed in this chapter.
155	EKI	CBWD	General				General determination process. In general, a systematic process for selecting representative wells is not discussed. The basis used to identify the various wells as representative is not clear.	The criteria used to select representative monitoring wells are given in Section 4.5.5
156	EKI	CBWD	General				Optimization. It also is unclear whether an effort was made to simplify the network to increase efficiency, and reduce cost (i.e., have the same wells be used for water levels, water quality monitoring, etc). The chapter needs a discussion of network optimization, including (a) coordination of monitoring with other agencies or entities to potentially share costs and eliminate redundant monitoring, and (b) identification of clustering and spatial redundancy within the network, via comparison of water level, well construction, and water quality data (see preceding comment #2), to eliminate wells that are not both unique and representative.	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
157	EKI	CBWD	General				Clustering effects. The potential effect of data clustering on conclusions drawn from parts of the network with very high well densities also is not discussed. The well density discussion needs to consider the potential effects of data clustering on conclusions drawn from aggregation of water level data. For example, if Undesirable Results are defined as a certain percentage of monitoring network wells experiencing water levels below their Minimum Thresholds, clustering of wells through intentional "selection of additional wells in heavily pumped areas" may artificially magnify the apparent portion of the basin affected, increasing the likelihood of it being judged as out of compliance with sustainability criteria.	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.
158	EKI	CBWD	General				Sustainability Criteria. The Monitoring Network section does not include "quantitative values for the minimum threshold, measurable objective, and interim milestones that will be measured at each monitoring site", as required [§354.34 (g)(3)]. We understand that these sustainability criteria are currently under development, and anticipate that, when final, the appropriate values will be incorporated into this chapter.	This will be provided in the Sustainability Thresholds GSP chapter.
159	EKI	CBWD	General				Data gaps. Discussion of plans to fill data gaps is very general, with no description of "steps that will be taken to fill data gaps before the next five-year assessment, including the location and purpose of newly added or installed monitoring sites." [§354.38 (d)]. Regulations specify that each GSA identify data gaps wherever the basin does not contain (a) a sufficient number of monitoring sites, (b) does not monitor sites at a sufficient frequency, or (c) utilizes monitoring sites that are unreliable, including those that do not satisfy minimum standards of the monitoring network adopted by the agency. There is no reason therefore to create minimum well acceptance standards to match what is currently available, and instead criteria should emphasize the capacity to reliably monitor and track basin efforts to maintain sustainability.	Comment noted. The specific plan to fill data gaps will be developed during the GSP implementation phase.
160	EKI	CBWD	General				Acquisition of wells to meet network deficiencies. Regulations regarding minimum requirements for monitoring network wells state "If an Agency relies on wells that lack casing perforations, borehole depth, or total well depth information to monitor groundwater conditions as part of a Plan, the Agency shall describe a schedule for acquiring monitoring wells with the necessary information, or demonstrate to the Department that such information is not necessary to understand and manage groundwater in the basin." [§352.4]. Additionally, DWR's Best Management Practices #2 – Monitoring Networks & Identification of Data Gaps states that agricultural or municipal wells may be used in place of monitoring wells, but that "If not using a dedicated monitoring well, the GSA must provide a rationale and a schedule for acquiring one." The Monitoring Network section does not assert that the information available for existing wells is adequate to understand the basin, nor does it support or refute the need for a rationale and schedule for acquiring monitoring wells.	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.
161	EKI	CBWD	General				Access for future monitoring. DWR's Best Management Practices #2 – Monitoring Networks & Identification of Data Gaps also states, "Monitoring wells should be secured by a long-term access agreement to ensure year-round site access." No discussion is provided in the Monitoring Network section regarding negotiation goals or procedures to ensure access to wells on private property for monitoring in the future.	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.
162	EKI	CBWD	General				Implementation. Explanation of how the Monitoring Network will be developed and implemented is deferred to a later GSP section (Projects and Management Actions), although it is required in the Monitoring Network section [§354.34(b)].	This can be revisited for the Public Draft version of this section when the implementation section is available

**Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019**

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
163	EKI	CBWD	General				Areas with known data gaps. Very few wells were selected for the Monitoring Network within the southeastern part of the basin (near and upstream of Ventucopa). Ventura County Watershed Protection District maintains 51 wells in the area (Table 4-11, Figure 4-12), and private landowners have indicated they provided data to WC for additional wells in this area. It may be useful to reconsider inclusion of some of these wells into the network, to obtain better representation in this area of the basin. A pre-existing well with known construction data and some measurements is preferable to nothing, as long as the well is in acceptable condition.	Additional wells have been added to the monitoring network in these region.
164	EKI	CBWD	General				Field confirmation of selected Network wells. Anecdotally, some older historically gauged wells under consideration for inclusion within the network may have failed, allowing annular or aquifer materials into the casing, and altering their effective screened intervals. We recommend field-confirmation of total depths and general condition of wells selected for the network, particularly in areas of sparse well data density where each well represents large areas of the basin.	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.
165	EKI	CBWD	General				Surface water monitoring. Discussion of interconnected surface water monitoring is deferred until after numerical modeling is complete.	Comment noted.
166	EKI	CBWD	Pg. 4-14				Places where the relationships between sets of wells and databases is confusing: The distinction between California State Groundwater Elevation Monitoring (CASGEM) and other Department of Water Resources (DWR) wells is confusing. The text refers to Figure 4-3 as CASGEM wells, but the map labels say "DWR Database Wells." There appear to be 222 wells on the map, not 113. Terminology between text, table, and figure is inconsistent.	The text has been revised for clarity.
167	EKI	CBWD	Pg. 4-28				Places where the relationships between sets of wells and databases is confusing: "IRLP [sic] water quality measurements are sampled from surface locations." Why are Irrigated Lands Regulatory Program (ILRP) sites included in the groundwater quality database (see label and caption for Figure 4-10)? It is unclear whether all the sites in Table 4-9 are groundwater sites.	ILRP stations were utilized in the quality monitoring because surface flows within the basin, except during significantly high flow events, percolate into the groundwater system. These water quality measurements may be useful to provide information to the GSA as to the quality of water that enters the groundwater system.
168	EKI	CBWD	Pg. 4-29				Places where the relationships between sets of wells and databases is confusing: The relationship between databases from ILRP, California Environmental Data Exchange Network (CEDEN), U.S. Geological Survey (USGS), and National Water Quality Monitoring Council (NWQMC) is confusing. We suggest clarifying this point, perhaps using a Venn diagram or a similar graphic.	The text has been revised for clarity.
169	EKI	CBWD	Pg. 4-40				Monitoring network selection issues: Proposed Monitoring Network tiers reflect priorities in the following order: (i) recent data, (ii) frequent data, (iii) known construction information. This is reasonable if monitoring is limited only to acquisition of data from existing programs. However, if the network is selected to meet SGMA requirements and monitor specifically for the GSA, then construction information and future well access is more important than frequency of past measurements and (to an extent) more important than the date of the most recent measurement. Additionally, no discussion was provided of data by which the wells were determined to be representative of the basin.	There is not adequate information on well construction and well access to base well selection on these criteria. These will need to be considered as the monitoring program is developed during the GSP implementation phase.
170	EKI	CBWD	Pg. 4-35				Monitoring network selection issues: How were private landowner TDS values obtained? What was the context of the monitoring? Will landowners be enlisted to continue monitoring? How will this be accomplished if so?	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.
171	EKI	CBWD	Pg. 4-45				Monitoring network selection issues: "Wells with multiple depths..." The vertical distribution of representative wells is not discussed. It appears here as a goal, but there is no indication of the depth distribution of the representative network.	Criteria Updated.
172	EKI	CBWD	Pg. 4-53				Monitoring network selection issues: "...Established to monitor for salinity." What about other constituents from the groundwater conditions GSP chapter?	The text has been revised to describe the rationale for establishing the monitoring network only for salinity.

Cuyama Basin Monitoring Networks Chapter
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
173	EKI	CBWD	Pg. 4-53				Monitoring network selection issues: "...Unlikely to be monitored again by that monitoring agency." Will the GSA rely on the agencies to continue monitoring? Will the GSA attempt to share monitoring activity with the agency, ensure the network is monitored through their own funding?	Comment noted. This can be addressed when the monitoring network is finalized during the GSP implementation phase.
174	EKI	CBWD	Pg. 4-58				Monitoring network selection issues: "Well/measurement depths for three-dimensional constituent mapping." Was this considered in the section discussing groundwater level data gaps?	Not directly. We anticipate that the GSA will first need to focus on filling spatial data gaps in the monitoring network.
175	EKI	CBWD	Pg. 4-37				Text issues: Section 4.3.4 discusses CGPS stations on Figure 2.2-22. The Monitoring Networks section needs its own figure showing subsidence monitoring stations, including CGPS stations. Also, on the same page an unreferenced "subsidence white paper" is attributed to Appendix Z, which likely is a placeholder. The paper needs a complete reference.	The figure in Chapter 2 is sufficient. The white paper is an appendix to the Groundwater Conditions chapter - the reference has been revised for clarity.
176	EKI	CBWD	Pg. 4-39				Text issues: Section 4.5.1, discussing Management Areas, may be out of date. Several other sections discussing Management Areas also may no longer be accurate.	This section will be developed when the Board provides direction on management areas in the Basin.
177	EKI	CBWD	Pg. 4-62				Text issues: The subsidence monitoring network section should at least mention critical or subcritical infrastructure likely to be affected by subsidence. If none exists, it may be helpful to state this and cite as the reason that limited subsidence monitoring will be required.	The data gaps section identifies areas that may be critically affected by subsidence.
178	EKI	CBWD	Pg. 4-18				Table issues: Shouldn't "Number of SBCWA wells included in the Monitoring Network" be less than "Number of SBCWA wells"? The distinction between these categories is unclear. There is no discussion of why some are included, and others are not.	The text has been revised for clarity.
179	EKI	CBWD	Pg. 4-24				Table issues: CCSD well table shows two wells with longest period of record 37 years and median 11 years. This is not possible given only two wells.	Table has been updated
180	EKI	CBWD	Pg. 4-47 - 4-49				Table issues: Suggest adding a table number and identification on each page of the multi-page table.	The table format has been revised
181	EKI	CBWD	General				Figure issues: When map figure discussions in the text name geographic features, those features should be shown and labeled on the map (e.g., Pages 4-14, 4-18).	The text has been revised for clarity.
182	EKI	CBWD	Figure 4-2				Figure issues: Are all the hydrograph wells within this oval? Why focus on such a small part of the basin? This cannot be the extent of agriculture. Wells shown on hydrographs should be labeled on the map.	Yes. A single area was selected for presentation purposes as using all wells within the central basin would create a hydrograph that would not be useful or legible.
183	EKI	CBWD	Figure 4-15				Figure issues: As discussed above, the selection scheme values a monthly monitoring record over knowledge of critical well construction data (screened or perforated interval). We rather suggest swapping the criteria for Tier 2 and Tier 3. Also, text explaining the criteria for each tier needs to be increased in size for readability.	Suggestion noted but not included. Every well with data from 2017-2018 was included in the monitoring network regardless of well construction information or frequency of measurement.
184	EKI	CBWD	Figure 4-17				Figure issues: Faults should be included on this figure (and on most if not all water level monitoring network figures), especially since they were discussed in the monitoring well selection rationale.	Faults have been added to 4-16 and 4-17
185	EKI	CBWD	Figure 4-19				Figure issues: What are "Non-Groundwater Quality Monitoring Network Wells"? This should be explained in the text.	Wells have been removed from figure.
186	EKI	CBWD	Figure 4-20				Figure issues: This map distinguishes between Representative Wells and Active Groundwater Quality Monitoring Network Wells. The text says that all water quality network wells are representative wells.	Figure and text has been updated.
187	EKI	CBWD	Pg. 4-20				Misc/Minor: "East of Highway 33" should be "west of Highway 33."	This has been fixed.
188	EKI	CBWD	Figure 4-2				Misc/Minor: Data series labels on the plot should be clearer or larger.	This has been fixed.
189	EKI	CBWD	Pg. 4-26				Misc/Minor: "Landowners have provided data on 99 wells." Needs discussion of how the data were requested and obtained.	The text has been revised for clarity.
190	EKI	CBWD	Pg. 4-28				Misc/Minor: Throughout the document, Irrigated Lands Regulatory Program is abbreviated as "IRLP" rather than "ILRP."	This has been fixed.
191	EKI	CBWD	Pg. 4-44				Misc/Minor: "Proximity to other prominent features such as faults..." Based on this statement it is unclear - should monitoring wells be near or far from faults?	The text has been revised for clarity.

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan Monitoring Networks Draft

Prepared by:



September January 20198

Chapter 4 Monitoring Networks

This section of the Cuyama Basin Groundwater Sustainability Plan (GSP) discusses the planned monitoring networks needed to guide the GSP's path to sustainability. Monitoring networks need to be established for each sustainability indicator either directly or through monitoring through a proxy. This ~~section was prepared to meet the requirements of DWR's GSP regulations~~ section satisfies Subarticle 4 of the Sustainable Groundwater Management Act Regulations. This section discusses the objectives of the monitoring networks, existing monitoring networks used in the development of each network, and establishes a monitoring network for each sustainability indicator. Data gaps and a plan to fill data gaps if they are present are provided for each monitoring network.

This section does not include information about basin settings, undesirable results, sustainability thresholds, water budget information, or projects and management actions.

Table of Contents

Chapter 4 Monitoring Networks	4-2
Acronyms	4-10
4.1 Useful Terms	4-12
4.2 Monitoring Network Objectives	4-13
4.2.1 Basin Conditions Relevant to Measurement Density and Frequency	4-14
4.3 Existing Monitoring Used	4-17
4.3.1 Groundwater Level Monitoring	4-17
4.3.2 Overlapping and Duplicate Data	4-33
4.3.3 Groundwater Quality Monitoring (Combine Existing Programs)	4-33
4.3.4 Subsidence Monitoring	4-44
4.3.5 Surface Water Monitoring	4-44
4.4 Monitoring Rationales	4-46
4.5 Groundwater Level Monitoring Network	4-46
4.5.1 Management Areas	4-46
4.5.2 Monitoring Wells Selected for Monitoring Network	4-46
4.5.3 Monitoring Frequency	4-50
4.5.4 Spatial Density	4-50
4.5.5 Representative Monitoring	4-51
4.5.6 Groundwater Level Monitoring Network	4-52

4.5.7	Monitoring Protocols.....	4-58
4.5.8	Data Gaps.....	4-58
4.5.9	Plan to fill data gaps.....	4-58
4.6	Groundwater Storage Monitoring Network.....	4-60
4.7	Seawater Intrusion Monitoring Network.....	4-60
4.8	Degraded Groundwater Quality Monitoring Network.....	4-60
4.8.1	Management Areas.....	4-60
4.8.2	Monitoring Sites Selected for Monitoring Network.....	4-60
4.8.3	Monitoring Frequency.....	4-61
4.8.4	Spatial Density.....	4-61
4.8.5	Representative Monitoring.....	4-61
4.8.6	Groundwater Quality Monitoring Network.....	Error! Bookmark not defined.
4.8.7	Monitoring Protocols.....	4-67
4.8.8	Data Gaps.....	4-67
4.8.9	Plan to fill data gaps.....	4-67
4.9	Land Subsidence Monitoring Network.....	4-70
4.9.1	Management Areas.....	4-70
4.9.2	Monitoring Sites Selected for Monitoring Network.....	4-70
4.9.3	Monitoring Frequency.....	4-70
4.9.4	Spatial Density.....	4-70
4.9.5	Monitoring Protocols.....	4-72
4.9.6	Data Gaps.....	4-72
4.9.7	Plan to fill data gaps.....	4-72
4.10	Depletions of Interconnected Surface Water Monitoring Network.....	4-74
Chapter 4	Monitoring Networks.....	4-2
	Acronyms.....	4-64-6
4.1	Useful Terms.....	4-84-8
4.2	Monitoring Network Objectives.....	4-94-10
4.2.1	Basin Conditions Relevant to Measurement Density and Frequency.....	4-104-11
4.3	Existing Monitoring Used.....	4-134-13
4.3.1	Groundwater Level Monitoring.....	4-134-13

4.3.2	Overlapping and Duplicate Data.....	4-284-28
4.3.3	Groundwater Quality Monitoring (Combine Existing Programs).....	4-284-28
4.3.4	Subsidence Monitoring.....	4-394-37
4.3.5	Surface Water Monitoring.....	4-394-37
4.4	Monitoring Rationales.....	4-414-39
4.5	Groundwater Level Monitoring Network.....	4-414-39
4.5.1	Management Areas.....	4-414-39
4.5.2	Monitoring Wells Selected for Monitoring Network.....	4-414-39
4.5.3	Monitoring Frequency.....	4-454-43
4.5.4	Spatial Density.....	4-454-43
4.5.5	Representative Monitoring.....	4-464-44
4.5.6	Groundwater Level Monitoring Network.....	4-474-45
4.5.7	Monitoring Protocols.....	4-534-51
4.5.8	Data Gaps.....	4-534-51
4.5.9	Plan to fill data gaps.....	4-534-51
4.6	Groundwater Storage Monitoring Network.....	4-554-53
4.7	Seawater Intrusion Monitoring Network.....	4-554-53
4.8	Degraded Groundwater Quality Monitoring Network.....	4-554-53
4.8.1	Management Areas.....	4-554-53
4.8.2	Monitoring Sites Selected for Monitoring Network.....	4-554-53
4.8.3	Monitoring Frequency.....	4-564-53
4.8.4	Spatial Density.....	4-564-54
4.8.5	Representative Monitoring.....	4-564-54
4.8.6	Groundwater Quality Monitoring Network.....	4-564-54
4.8.7	Monitoring Protocols.....	4-614-58
4.8.8	Data Gaps.....	4-614-58
4.8.9	Plan to fill data gaps.....	4-614-58
4.9	Land Subsidence Monitoring Network.....	4-634-60
4.9.1	Management Areas.....	4-634-60
4.9.2	Monitoring Sites Selected for Monitoring Network.....	4-634-60
4.9.3	Monitoring Frequency.....	4-634-60

~~4.9.4 Spatial Density 4-634-60~~
~~4.9.5 Monitoring Protocols..... 4-654-62~~
~~4.9.6 Data Gaps..... 4-654-62~~
~~4.9.7 Plan to fill data gaps..... 4-654-62~~
~~4.10 Depletions of Interconnected Surface Water Monitoring Network 4-674-64~~

DRAFT

List of Figures

<u>Figure 4-1: Well Completion Diagram.....</u>	<u>4-13</u>
<u>Figure 4-2: Central Basin with Combined Hydrograph</u>	<u>4-15</u>
<u>Figure 4-3: Cuyama GW Basin Wells with Monitoring Data Provided by DWR</u>	<u>4-19</u>
<u>Figure 4-4: Cuyama GW Basin Wells with Monitoring Data Provided by USGS.....</u>	<u>4-22</u>
<u>Figure 4-5: Cuyama GW Basin Wells with Monitoring Data Provided by SBCWA.....</u>	<u>4-24</u>
<u>Figure 4-6: Cuyama GW Basin Wells with Monitoring Data Provided by SLOCFC&WCD .</u>	<u>4-</u>
<u>26</u>	
<u>Figure 4-7: Cuyama GW Basin Wells with Monitoring Data Provided by VCWPD.....</u>	<u>4-28</u>
<u>Figure 4-8: Cuyama GW Basin Wells with Monitoring Data Provided by CCSD.....</u>	<u>4-30</u>
<u>Figure 4-9: Cuyama GW Basin Wells with Monitoring Data Provided by Private</u>	
<u>Landowners</u>	<u>4-32</u>
<u>Figure 4-10: Cuyama Basin NWQMC, USGS, ILRP Water Quality Monitoring Sites.....</u>	<u>4-35</u>
<u>Figure 4-11: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites.....</u>	<u>4-37</u>
<u>Figure 4-12: Cuyama Basin CCSD Water Quality Monitoring Site.....</u>	<u>4-39</u>
<u>Figure 4-13: Cuyama Basin VCWPD Water Quality Sites</u>	<u>4-41</u>
<u>Figure 4-14: Cuyama Basin Landowner Water Quality Sites</u>	<u>4-43</u>
<u>Figure 4-15: Cuyama Basin Streams and Rivers with Existing Gages.....</u>	<u>4-45</u>
<u>Figure 4-16: Cuyama Well Tiering Criteria</u>	<u>4-47</u>
<u>Figure 4-17: Cuyama Basin Groundwater Level and Storage Monitoring Network Wells by</u>	
<u>Tier</u>	<u>4-49</u>
<u>Figure 4-18: Groundwater Level and Storage Representative Wells and other Monitoring</u>	
<u>Network Wells.....</u>	<u>4-57</u>
<u>Figure 4-19: Groundwater Levels Monitoring Network Data Gap Areas</u>	<u>4-59</u>
<u>Figure 4-20: Cuyama Basin Groundwater Quality Monitoring Network Wells</u>	<u>4-66</u>
<u>Figure 4-21: Identification of Groundwater Quality Monitoring Data Gaps.....</u>	<u>4-69</u>
<u>Figure 4-22: Current Subsidence Monitoring Stations In and Around the Cuyama Basin</u>	<u>4-</u>
<u>71</u>	
<u>Figure 4-23: Subsidence Monitoring Location Data Gap Areas.....</u>	<u>4-73</u>
<u>Figure 4-1: Well Completion Diagram.....</u>	<u>4-94-9</u>
<u>Figure 4-2: Central Basin with Combined Hydrograph</u>	<u>4-114-12</u>
<u>Figure 4-3: Cuyama Basin DWR/CASGEM Wells</u>	<u>4-154-15</u>

<u>Figure 4-4: Cuyama Basin USGS Wells</u>	<u>4-174-17</u>
<u>Figure 4-5: Cuyama Basin SBCWA Managed Wells</u>	<u>4-194-19</u>
<u>Figure 4-6: Cuyama Basin SLOCFC&WCD Wells</u>	<u>4-214-21</u>
<u>Figure 4-7: Cuyama Basin VCWPD Wells</u>	<u>4-234-23</u>
<u>Figure 4-8: Cuyama Basin Community Services District Wells</u>	<u>4-254-25</u>
<u>Figure 4-9: Cuyama Basin Private Landowner Wells</u>	<u>4-274-27</u>
<u>Figure 4-10: Cuyama Basin NWQMC, USGS, IRLP Water Quality Monitoring Sites</u>	<u>4-304-30</u>
<u>Figure 4-11: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites</u> ..	<u>4-324-32</u>
<u>Figure 4-12: Cuyama Basin VCWPD Water Quality Sites</u>	<u>4-364-34</u>
<u>Figure 4-13: Cuyama Basin Landowner Water Quality Sites</u>	<u>4-384-36</u>
<u>Figure 4-14: Cuyama Basin Streams and Rivers with Existing Gages</u>	<u>4-404-38</u>
<u>Figure 4-15: Cuyama Well Tiering Criteria</u>	<u>4-424-40</u>
<u>Figure 4-16: Cuyama Basin Groundwater Level and Storage Monitoring Network Wells by Tier</u>	<u>4-444-42</u>
<u>Figure 4-17: Groundwater Level and Storage Representative Wells and other Monitoring Network Wells</u>	<u>4-524-50</u>
<u>Figure 4-18: Groundwater Levels Monitoring Network Data Gap Areas</u>	<u>4-544-52</u>
<u>Figure 4-19: Cuyama Basin Groundwater Quality Monitoring Network Wells</u>	<u>4-604-57</u>
<u>Figure 4-20: Identification of Groundwater Quality Monitoring Data Gaps</u>	<u>4-624-59</u>
<u>Figure 4-21: Current Subsidence Monitoring Stations In and Around the Cuyama Basin</u>	<u>4-644-61</u>
<u>Figure 4-22: Subsidence Monitoring Location Data Gap Areas</u>	<u>4-664-63</u>

List of Tables

<u>Table 4-1: Cuyama Basin Monitoring Well Information Provided by CASGEM</u>	<u>4-18</u>
<u>Table 4-2: Cuyama Basin Monitoring Well Information Provided by USGS.....</u>	<u>4-20</u>
<u>Table 4-3: Cuyama Basin Monitoring Well Information Provided by SBCWA</u>	<u>4-23</u>
<u>Table 4-4: Cuyama Basin Monitoring Well Information Provided by SLOCFC&WCD</u>	<u>4-25</u>
<u>Table 4-5: Cuyama Basin Monitoring Well Information Provided by VCWPD.....</u>	<u>4-27</u>
<u>Table 4-6: Cuyama Basin Monitoring Well Provided Information by CCSD.....</u>	<u>4-29</u>
<u>Table 4-7: Cuyama Basin Monitoring Well Information Provided by Private Landowners</u>	<u>4-</u>
31	
<u>Table 4-8: Well Identification Matrix</u>	<u>4-33</u>
<u>Table 4-9: Cuyama Basin NWQMC, USGS, ILRP Water Quality Monitoring Sites Summary Statistics</u>	<u>4-34</u>
<u>Table 4-10: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites Summary Statistics</u>	<u>4-36</u>
<u>Table 4-11: Cuyama Basin CCSD Water Quality Site Summary Data.....</u>	<u>4-38</u>
<u>Table 4-12: Cuyama Basin VCWPD Water Quality Sites Summary Data.....</u>	<u>4-40</u>
<u>Table 4-13: Cuyama Basin Landowner Water Quality Sites Summary Data</u>	<u>4-42</u>
<u>Table 4-14: Number of Wells Selected for Monitoring Network</u>	<u>4-48</u>
<u>Table 4-15: Monitoring frequency Based on Aquifer Properties and Degree of Use</u>	<u>4-50</u>
<u>Table 4-16: Monitoring Well Density Considerations</u>	<u>4-51</u>
<u>Table 4-17: Wells included in the Groundwater Levels and Storage Monitoring Network.</u>	<u>4-</u>
56	
<u>Table 4-18: Groundwater Quality Monitoring Sites by Source.....</u>	<u>4-61</u>
<u>Table 4-19: Wells Included in the Groundwater Quality Monitoring Network.....</u>	<u>4-63</u>
<u>Table 4-1: Summary Statistics for CASGEM Wells within Cuyama Basin.....</u>	<u>4-144-14</u>
<u>Table 4-2: Cuyama Basin USGS Well Statistics.....</u>	<u>4-164-16</u>
<u>Table 4-3: Cuyama Basin SBCWA Well Statistics.....</u>	<u>4-184-18</u>
<u>Table 4-4: Cuyama Basin SLOCFC&WCD Wells Statistics</u>	<u>4-204-20</u>
<u>Table 4-5: Cuyama Basin VCWPD Wells</u>	<u>4-224-22</u>
<u>Table 4-6: Cuyama Basin CCSD Well Statistics.....</u>	<u>4-244-24</u>
<u>Table 4-7: Cuyama Basin Private Landowner Well Statistics</u>	<u>4-264-26</u>

<u>Table 4-8: Well Identification Matrix</u>	<u>4-284-28</u>
<u>Table 4-9: Cuyama Basin NWQMC, USGS, IRLP Water Quality Monitoring Sites Summary Statistics</u>	<u>4-294-29</u>
<u>Table 4-10: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites Summary Statistics</u>	<u>4-314-31</u>
<u>Table 4-11: Cuyama Basin VCWPD Water Quality Sites Summary Data</u>	<u>4-354-33</u>
<u>Table 4-12: Cuyama Basin Landowner Water Quality Sites Summary Data</u>	<u>4-374-35</u>
<u>Table 4-13: Number of Wells Selected for Monitoring Network</u>	<u>4-434-41</u>
<u>Table 4-14: Monitoring frequency Based on Aquifer Properties and Degree of Use ..</u>	<u>4-454-43</u>
<u>Table 4-15: Monitoring Well Density Considerations</u>	<u>4-464-44</u>
<u>Table 4-16: Wells included in the Groundwater Levels and Storage Monitoring Network.</u>	<u>4-514-49</u>
<u>Table 4-17: Groundwater Quality Monitoring Sites by Source.....</u>	<u>4-564-53</u>
<u>Table 4-18: Wells Included in the Groundwater Quality Monitoring Network</u>	<u>4-594-56</u>

Acronyms

ACWI	Advisory Committee on Water Information
AFY	Acre feet per year
ARS	Agricultural Research Service
Basin	Cuyama Valley Groundwater Basin
BMP	Best Management Practices
CA	California
CASGEM	California Statewide Groundwater Elevation Monitoring
CBGSA	Cuyama Basin Groundwater Sustainability Agency
CBWD	Cuyama Basin Water District
CCSD	Cuyama Community Services District
CEDEN	California Environmental Data Exchange Network
CGPS	CGPS
DWR	California Department of Water Resources
EPA	Environmental Protection Agency
GAMA	Groundwater Ambient Monitoring and Assessment
GICIMA	Groundwater Information Center Interactive Map
GSA	Groundwater Sustainability Agency
<u>ILRRLP</u>	Irrigated Lands <u>Regulatory</u> Program
MSC	Master Site Code
msl	mean sea level
NWIS	National Water Information System
NGWMN	National Ground-Water Monitoring Network
NWQMC	National Water Quality Monitoring Council
SBCWA	Santa Barbara County Water Agency
SLOCFC&WCD	San Luis Obispo County Flood Control & Water Conservation District
SWN	State Well Number
TSS	Technical Services Support
USGS	United States Geological Survey
VCWPD	Ventura County Water Protection District

DRAFT

4.1 Useful Terms

The monitoring networks section includes descriptions of groundwater wells, water quality measurements, subsidence stations, and other related components. A list of technical terms and a description of the terms are listed below. Figure 4-1 shows a diagram of a monitoring well with well related terms identified on the diagram. The terms and their descriptions are identified here to guide readers through the section and are not a definitive definition of each term:

- Well related terms:
 - **Ground Surface Elevation** – The elevation in feet above mean sea level (msl) at the well’s location.
 - **Total Well Depth** – The depth that a well is installed to. This is often deeper than the bottom of the screened interval.
 - **Screened interval** – The portion of a well casing that is screened to allow water from the surrounding soil into the well pipe. There can be several screened intervals within the same well. Screened interval is usually reported in feet below ground surface elevation for both the upper most limit and lower most limit of the screen.
 - **Top Perforation** – The distance to the top of the perforation from the ground surface elevation.
 - **Bottom Perforation** – The distance to the bottom of the perforation from the ground surface elevation.
 - **Water Surface Elevation** – The elevation above mean sea level (msl) that water is encountered inside the well
 - **Depth to Water** – The distance from the ground surface or the well’ to where water is encountered inside the well
- **Historical high groundwater elevations** – This is the highest measurement of static groundwater elevation (closest to the ground surface) in a monitoring well that was recorded. Measurements of groundwater elevation are used to indicate the elevation of groundwater levels in the area near the monitored well.
- **Historical low groundwater elevations** – This is the lowest measurement of static groundwater elevation (furthest from the ground surface) in a monitoring well that was recorded. Measurements of groundwater elevation are used to indicate the elevation of groundwater levels in the area near the monitored well.
- **Depth to Groundwater** – This is the distance from the ground surface to groundwater, typically reported at a well.
- **Hydrograph** – A hydrograph is a graph that shows the changes in groundwater elevation over time for each monitoring well. Hydrographs show how groundwater elevations change over the years and indicate whether groundwater is rising or descending over time.



Figure 4-14-1: Well Completion Diagram

- **Constituent** – Refers to a water quality parameter measured to assess groundwater quality.
- **Subsidence** (refer to appendix Z which was included with Groundwater Conditions) – Refers to the sinking or downward settling of the earth’s surface, not restricted in rate, magnitude, or area involved, and is often the result of over-extraction of subsurface water.
- **Best Management Practice** – Refers to a practice, or combination of practices, that are designed to achieve sustainable groundwater management and have been determined to be technologically and economically effective, practicable, and based on best available science (California (CA) Code of Regulations, Title 23, Article 2).
- **Data Gap** – Refers to a lack of information that significantly affects the understanding of the basin setting or evaluation of the efficacy of Plan implementation and could limit the ability to assess whether a basin is being sustainably managed (CA Code of Regulations, Title 23, Article 2).
- **Representative Monitoring** – Refers to a monitoring site within a broader network of sites that typifies one or more conditions within the basin or an area of the basin (CA Code of Regulations, Title 23, Article 2).

4.2 Monitoring Network Objectives

This section describes the Cuyama Valley Groundwater Basin (Basin) Monitoring Networks for the five sustainability indicators that apply to the Basin. The objective of these monitoring networks is to detect undesirable results in the basin as described in Section 3 of this Groundwater Sustainability Plan (GSP) using the sustainability thresholds described in Section 5 of this GSP. Other, related objectives of the monitoring network were defined by the GSP regulations promulgated by the Department of Water Resources (DWR):

- Demonstrate progress toward achieving measurable objectives described in the Plan
- Monitor impacts to the beneficial uses or users of groundwater
- Monitor changes in groundwater conditions relative to measurable objectives and minimum thresholds
- Quantify annual changes in water budget components

The monitoring network plan provided to the Basin is intended to monitor:

- Chronic lowering of groundwater levels

- Reduction in groundwater storage
- Degraded water quality
- Land subsidence
- Depletions of interconnected surface water

The monitoring networks described in this section were designed by evaluating data provided by DWR, USGS, participating counties, and private landowners. Wells currently used for such activity are included and considered based on criteria further described below.

4.2.1 Basin Conditions Relevant to Measurement Density and Frequency

This section summarizes key basin conditions that influence the development of monitoring networks. The key conditions include hydrogeologic considerations, land use considerations, and historical groundwater conditions considerations.

The Basin, as described in the Section 2.1, is composed of one principal aquifer comprised of three geologic groups: Younger Alluvium, Older Alluvium, and Morales Formation. The majority of groundwater in the aquifer is stored in the younger and older alluvium. While there are many faults in the Basin, there are no major stratigraphic aquitards or barriers to vertical groundwater movement amongst the alluvium and Morales Formation. The aquifer has a wide range of thicknesses that vary spatially, with median reported hydraulic conductivity ranges from 1.22 – 72.1 ft/day (see Table 2.1-1 for detailed values). Figure 2.1-2 shows the extent of these formations throughout the basin.

The largest groundwater use within the Basin is for agriculture and irrigation. Figures 1-6 through 1-13 show the extent of land used for irrigated agriculture within the Basin. Based on the most recent data from 2016, there is approximately 53 square miles of agricultural land in the Basin out of a total of approximately 378 square miles, or of the Basin totaling roughly 14%.

Data provided in Section 2.2 shows the historical declining trend of groundwater levels within the central portion of the basin. Generally, groundwater elevations in this portion of the basin have been decreasing decreased by more than 400 feet from the 1940s and 1950s to the present, as shown in Figure 4-2.

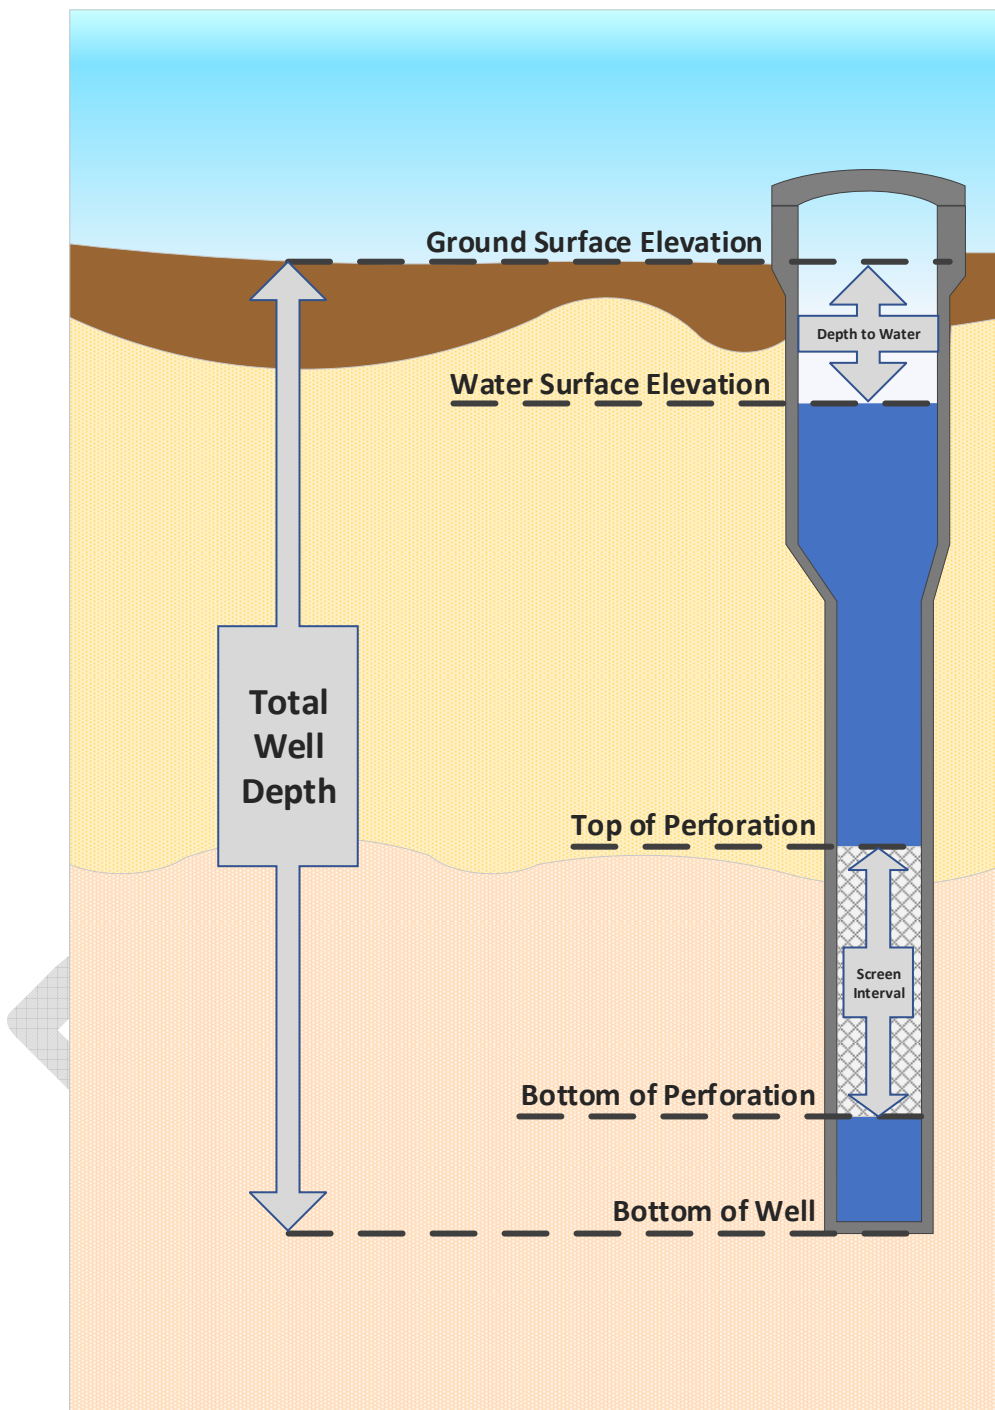


Figure 4-24-2: Central Basin with Combined Hydrograph

DRAFT

4.3 Existing Monitoring Used

This section discusses current groundwater level monitoring with the Basin.

4.3.1 Groundwater Level Monitoring

This section describes the groundwater level monitoring that has been conducted by agencies and private land owners in the Basin.

Department of Water Resources, Statewide Dataset / CASGEM

The State of California has several water-related database portals accessible online. These include, but are not limited to, the California Statewide Groundwater Elevation Monitoring (CASGEM) Program, Water Data Library (WDL), and the Groundwater Information Center Interactive Map Application (GICIMA). The data for these portals is organized and saved in one master database, where each portal accesses and displays the intended data dependent on the search criteria and portal being used.

In an attempt to include all available data related to the Basin, DWR was contacted directly and they provided a link ~~to~~ for Groundwater Sustainability Agency (GSA) representatives to download the entire State's database. Cuyama Basin data was then extracted from this dataset.

Although the master dataset was used to collect the initial data, the CASGEM portal was utilized throughout the planning process to verify data (DWR CASGEM Online System, 2018). CASGEM is tasked with tracking seasonal and long-term groundwater elevation trends in groundwater basins throughout the state. CASGEM was initialized by Senate Bill x7-6 passed by the legislature in 2009 to establish collaboration between local monitoring parties and DWR to collect groundwater elevations (DWR Groundwater Monitoring [CASGEM] 2018).

CASGEM allows locally agencies to be designated as CASGEM monitoring entities for groundwater basins throughout the state (CASGEM Brochure 2018). CASGEM monitoring entities can measure groundwater elevation or compile data from other agencies to fulfill a monitoring plan and each is responsible for submitting that data to DWR. Three monitoring entities operate as CASGEM monitoring entities in the Cuyama Basin; the Santa Barbara County Water Agency (SBCWA), Ventura County Watershed Protection District (VCWPD), and San Luis Obispo Flood Control & Water Conservation District (SLOFC&WCD).

CASGEM includes two kinds of wells in its database:

- CASGEM Wells – All of these wWells with include well construction information
- Voluntary Wells – Wells included in the CASGEM database on a volunteer basis where the well construction has may not been identified or made public

There are currently six CASGEM wells and 107 voluntary wells in the Basin. Figure 4-3 shows the locations of these wells.

Most wells were measured on either a semi-annual or annual schedule. Summary data about the wells reported through CASGEM can be seen in Table 4-1.

CASGEM Wells	
Number of CASGEM wells	6
Number of voluntary wells	107
Total number of DWR and CASGEM wells	222
Earliest measurement year	1946
Longest period of record	68 years
Median period of record	12 years
Median number of records for a single well	19

Table 4-14-1: ~~Cuyama Basin Monitoring Well Information Provided by CASGEM Summary Statistics for CASGEM Wells within Cuyama Basin~~

Spatial distribution of the wells is best suited to capture groundwater trends in the central portion of the Basin, and around the Ventucopa area. There are also several monitoring wells in the south eastern portion of the Basin ~~near the junction of Highway 33 and Lockwood Valley Road upstream of Ventucopa.~~ CASGEM data is sparser along the north facing slopes of the main Cuyama Valley and the western portion of the Basin, as can be seen in Figure 4-3.

Figure 4-34-3: Cuyama GW Basin Wells with Monitoring Data Provided by DWR/CASGEM Wells

DRAFT

United States Geological Survey

The United States Geological Survey (USGS) has the most groundwater elevation monitoring locations within the Basin. Many of these wells were installed for a 1966 groundwater study and have since been retired.

It should be noted that there are significant overlaps between the DWR provided datasets and the USGS provided datasets. Approximately 106 wells appeared in both downloaded datasets. Discussion about overlapping data is provided in Section 4.3.2 below.

USGS data may be accessed through their online portals for the National Ground-Water Monitoring Network (NGWMN), Groundwater Watch, and National Water Information System (NWIS).

The USGS online data portals provide “Approved” data which has been quality-assured and fit to be published, and “Provisional” data which is unverified and subject to revision. The USGS was contacted directly and coordinated download of their monitoring records in the Basin, and to obtain all available data, the USGS URL Generation tool was used to download all provisional and approved data within the Basin.

USGS has approximately ~~25 approved~~476 wells within the basin, ~~but many more that have data that is provisional~~. Summary statistics of this data may be found in Table 4-2 below.

USGS Wells	
Number of Approved wells	25
Number of Provisional wells	451
Total number of USGS wells	476
Earliest measurement date	1946
Longest period of record	68 years
Median period of record	2 years
Median number of records for a single well	2 years

Table 4-24-2: Cuyama Basin Monitoring Well Information Provided by USGS Cuyama Basin USGS Well Statistics

A significant portion of the wells included in the USGS wells-dataset are located near the Cuyama River and in the central portion of the Basin. Wells are also found along many of the tributaries that feed the Cuyama River during large precipitation events. Well locations ~~are included in the USGS dataset are shown in~~ Figure 4-4.

DRAFT

Figure 4-44-4: Cuyama GW Basin Wells with Monitoring Data Provided by Cuyama Basin USGS
Wells

DRAFT

Santa Barbara County Water Agency

The Santa Barbara County Water Agency (SBCWA) ~~manages-maintains~~ data for ~~3629~~ wells within the Cuyama Basin. Some of those wells are owned by private land owners, while others owned by local agencies such as Caltrans and the California Department of Fish and Wildlife. ~~Many of these wells are included in the DWR statewide dataset.~~ Summary statistics for these wells are included in Table 4-3 below.

SBCWA Wells	
Number of SBCWA- monitored wells	3629
Earliest measurement date year	1950 1988
Longest period of record	6830 years
Median period of record	21.4 years
Median number of records for a single well	89
Number of SBCWA wells included in the Monitoring Network	230

Table 4-34-3: Cuyama Basin Monitoring Well Information Provided by SBCWA Cuyama Basin SBCWA Well Statistics

Wells ~~managed by~~included in the SBCWA dataset are located within Santa Barbara County near the Cuyama River and ~~Miranda Canyon, as well as between Cottonwood Canyon and Aliso Canyon in the hills to the south of the river.~~ Figure 4-5 shows the locations of these wells~~the SBCWA managed wells.~~

**Figure 4-54-5: Cuyama GW Basin Wells with Monitoring Data Provided by Cuyama Basin SBCWA
Managed Wells**

DRAFT

San Luis Obispo County Flood Control & Water Conservation District

San Luis Obispo County Flood Control & Water Conservation District (SLOCFC&WCD) ~~manages~~ ~~maintains data for~~ two wells within the Basin. SLOCFC&WCD also reports the data for the two wells to DWR, thus all data is for the wells is incorporated through the DWR dataset.

The wells are located in the central portion of the Basin, north of the Cuyama River and ~~east-west~~ of Highway 33. Both wells meet the minimum requirements to be included in the monitoring network, and summary statistics are provided in Table 4-4 below.

SLOCFC&WCD Wells	
Number of SLOCFC&WCD monitored -wells	2
Earliest measurement date year	1990
Longest period of record	28 years
Median period of record	18 years
Median number of records for a single well	35

Table 4-44-4: Cuyama Basin Monitoring Well Information Provided by SLOCFC&WCD Cuyama Basin SLOCFC&WCD Wells Statistics

Locations for the two ~~wells included in the~~ SLOCFC&WCD ~~managed wells are provided~~ dataset are ~~shown~~ in Figure 4-6.

Figure 4-64-6: Cuyama GW Basin Wells with Monitoring Data Provided by Cuyama Basin SLOCFC&WCD Wells

DRAFT

Ventura County Watershed Protection District

The Ventura County Watershed Protection District (VCWPD) manages 22 groundwater elevation monitoring wells within the Basin. Twenty of those wells are incorporated in the DWR dataset.

The majority of wells managed by VCWPD are discontinued and no longer measure groundwater elevations. Five of the 22 wells have measured elevation data within the last decade and are currently active. A summary of the wells statistics is provided in Table 4-5 below.

VCWPD Wells	
Number of SLOCFC&WCD VCWPD-monitored wells	22
Earliest measurement date year	1971
Longest period of record	46 years
Median period of record	5.8 years
Median number of records for a single well	21.5

Table 4-5: Cuyama Basin Monitoring Well Information Provided by VCWPD Cuyama Basin
VCWPD Wells

The wells included in the VCWPD wells-dataset are located in the south eastern portion of the Basin that intersects with Ventura County. The wells are primarily found near the Cuyama River close to agricultural lands. Locations for the wells are provided in Figure 4-7.

Figure 4-74-7: Cuyama GW Basin Wells with Monitoring Data Provided by Cuyama Basin VCWPD
Wells

DRAFT

Cuyama Community Services District

The Cuyama Community Services District (CCSD) ~~manages-performs monitoring on its~~ two production wells, one of which has been retired. The CCSD wells are located just south of the CCSD. Data for these wells is included in the SBCWA dataset, as well as the DWR and USGS datasets. Summary statistic for the wells is included in Table 4-6. Locations for these wells can be found in Figure 4-8.

CCSD Wells	
Number of CCSD- monitoring wells	2
Earliest measurement date year	1981
Longest period of record	37 years
Median period of record	26.54 years
Median number of records for a single well	79

Table 4-64-6: Cuyama Basin Monitoring Well Provided Information by CCSD Cuyama Basin CCSD Well Statistics

**Figure 4-84-8: Cuyama GW Basin Wells with Monitoring Data Provided by CCSDCuyama Basin
Community Services District Wells**

DRAFT

Private Landowners

Private landowners within the Basin own and operate large numbers of wells, primarily for irrigation and domestic use. Many wells owned by private landowners are included in the databases described above. In addition, these landowners have provided additional monitoring data on 99 wells at the request of the GSA. Summary statistics for ~~these wells~~this additional data is provided in Table 4-7.

Private Landowner Wells	
Number of Private Landowner wells <u>with monitoring data</u>	99
Earliest measurement date year	1975
Longest period of record	42 years
Median period of record	15 years
Median number of records for a single well	16

Table 4-7-7: Cuyama Basin Monitoring Well Information Provided by Private Landowners Cuyama Basin Private Landowner Well Statistics

The private landowner wells with for which provided monitoring information was provided are distributed throughout the Basin. The majority of wells are located within the central portion of the Basin near the Cuyama River and Highway 166. There is an additional cluster towards the western portion of the basin that runs along the Cuyama River. Private landowner wells are shown in Figure 4-9.

Figure 4-94-9: Cuyama GW Basin Wells with Monitoring Data Provided by Cuyama Basin Private Landowners - Wells

DRAFT

4.3.2 Overlapping and Duplicate Data

Many of the data sources used to compile and create the Cuyama Basin Database contain duplicate entries for wells, metadata, groundwater level measurements, and groundwater quality measurements. Much of the well information managed by the counties within the Basin is also provided and incorporated into the DWR dataset. Many of the USGS wells and DWR wells overlap between datasets.

To avoid duplicate entries when compiling the Cuyama Basin Database, wells were organized by their State Well Number (SWN), Master Site Code (MSC), USGS ID, Local Name, and Name. Duplicates were identified and then removed or combined as necessary. Each unique well was then assigned an OPTI ID which was used as the primary identification number for all other processes and mapping exercises.

OPTI IDs were used to identify wells in the database within the Basin because not all data sources use similar identification methods, as shown in Table 4-8 below.

<u>Managing Entity Data</u> <u>Maintaining Entity</u>	SWN	CASGEM ID	USGS ID	MSC	Local Name	Name
DWR	✓	✓		✓		
USGS	✓		✓		✓	
SLOCFC&WCD	✓					
SBCWA	✓		✓		✓	
VCWPD	✓					
Private Landowners					✓	✓

✓ = All wells had this information, ✓ = Some wells had the information, ✓ = Few wells had the information

Table 4-84-8: Well Identification Matrix

4.3.3 Groundwater Quality Monitoring (Combine Existing Programs)

This section discusses existing groundwater quality monitoring programs collected for GSP development in the Cuyama Basin.

NWQMC / USGS / IRLPILRP

The National Water Quality Monitoring Council (NWQMC) was created in 1997 to provide a collaborative, comparable, and cost-effective approach for monitoring and assessing the United State’s water quality. Several organizations contribute to the database including the Advisory Committee on Water Information (ACWI), the Agricultural Research Service (ARS), the Environmental Protection Agency (EPA), and USGS (NWQMC, 2018).

A single online portal provides access to data from the contributing agencies. Data is included from the USGS national Water Information System (NWIS) the EPA STORAGE and RETRIEVAL (STORET) Data Warehouse, and the USDA ARS Sustaining The Earth’s Watersheds – Agricultural Research Database System (STEWARDS). Data incorporates hundreds of different water quality constituents from the

different contributing agencies. Initial water quality data for the Cuyama Basin was downloaded through NWQMC and included data for USGS monitoring sites and Irrigated Land Regulatory Program (IRLP-ILRP) monitoring sites. IRLP-ILRP was initiated in 2003 to prevent agricultural runoff from impairing surface waters, and in 2012, groundwater regulations were added to the program. IRLP-ILRP water quality measurements are sampled from surface locations (DWR IRLP-ILRP, 2018). There are currently five IRLP-ILRP measurement sites within the Cuyama Basin. IRLP-ILRP uses the California Environmental Data Exchange Network (CEDEN) to manage the data associated with the program. CEDEN data is then incorporated with USGS data, and thus included in the NWQMC database (DWR CEDEN, 2018).

The NWQMC database provides TDS data on 18047 water quality monitoring sites. This database also provided data for a wide variety of constituents not included here.

-Summary statistics for this the NWQMC, USGS and ILRP monitoring sites information is shown in Table 4-9.

NWQMC, USGS, and <u>IRLP-ILRP</u> Water Quality Monitoring Sites	
Number of measurement sites	<u>176180</u>
Earliest measurement date year	1940
Longest period of record	53 years
Median period of record	<1 year
Median number of records for a single site	2

Table 4-94-9: Cuyama Basin NWQMC, USGS, IRLP-ILRP Water Quality Monitoring Sites Summary Statistics

The majority of the water quality monitoring sites included in the NWQMC database are located in the central portion of the basin and along the Cuyama River as it follows Highway 33. These monitoring sites can be seen in Figure 4-10.

Figure 4-104-10: Cuyama Basin NWQMC, USGS, ~~IRLP-ILRP~~ Water Quality Monitoring Sites

DRAFT

GAMA / DWR

The Groundwater Ambient Monitoring and Assessment (GAMA) Program is the State of California's groundwater quality monitoring program created by the State Water Resources Control Board in 2000, and later expanded by Assembly Bill 599, the Groundwater Quality Monitoring Act of 2001 (DWR GAMA 2018). The purpose of GAMA is to improve statewide comprehensive groundwater monitoring and increase the availability of information to the general public about groundwater quality and contamination information. Additionally, GAMA aims to establish groundwater quality on basin wide scales, continue with groundwater quality sampling and studies, and centralize the information and data for the public and decision makers to enhance groundwater resource protection.

DWR also publishes statewide water quality data via the California Natural Resources Agency. Access to DWR and GAMA information and data is accessible through separate online portals.

There are 213 GAMA and DWR groundwater quality monitoring sites within the Basin. Summary statistics for these sites is included in Table 4-10.

GAMA / DWR Water Quality Monitoring Sites	
Number of measurement sites	213
Earliest measurement date year	1942
Longest period of record	41 years
Median period of record	<1 year
Median number of records for a single site	2

Table 4-10-10: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites Summary Statistics

The GAMA / DWR groundwater quality monitoring locations are spread throughout the Basin, loosely following the Cuyama River. There are currently 60 water quality monitoring sites per 100 miles² within the Basin. These locations can be seen in Figure 4-11.

Figure 4-114-14: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites

DRAFT

Cuyama Community Services District

The Cuyama Community Services District (CCSD) currently operates one production well for residential distribution within the Basin. Although some data for this well is included in the NWQMC dataset, annual Consumer Confidence Reports from 2011 to 2017 were processed for additional water quality data measurements. Summary Statistics for the CCSD well are included in Table 4-11 and the location is shown in Figure 4-12.

<u>CCSD/CWPD Water Quality Monitoring Sites</u>	
<u>Number of measurement sites</u>	<u>1</u>
<u>Earliest measurement date</u>	<u>2008</u>
<u>Period of record</u>	<u>10 years</u>
<u>Number of records</u>	<u>21</u>

Table 4-11: Cuyama Basin CCSD Water Quality Site Summary Data

Figure 4-12: Cuyama Basin CCSD Water Quality Monitoring Site

DRAFT

Ventura County Watershed Protection District

VCWPD has 51 groundwater wells that have been utilized for groundwater quality monitoring within the Basin. All of the wells are incorporated into the DWR, GeoTracker, or USGS datasets. Sampling data includes numerous water quality constituents, however, this GSP only addresses TDS. Summary statistics for the wells are included in Table 4-12, and locations of these wells are included in Figure 4-13.

VCWPD Water Quality Monitoring Sites	
Number of measurement sites	51
Earliest measurement date	1957
Longest period of record	45
Median period of record	7
Median number of records for a single site	5

Table 4-124-11: Cuyama Basin VCWPD Water Quality Sites Summary Data

Figure 4-134-12: Cuyama Basin VCWPD Water Quality Sites

DRAFT

Private Landowners

Private landowners within the Basin conducted groundwater quality testing, which has been incorporated into this document and associated analysis. Eleven wells measured Total Dissolved Solids in 2015. Summary statistics for these sites can be included in Table 4-13 and locations are included in Figure 4-14.

Private Landowner Water Quality Monitoring Sites	
Number of measurement sites	11
Earliest measurement date	1/12/2015
Longest period of record	N/A
Median period of record	N/A
Median number of records for a single site	1

Table 4-13-12: Cuyama Basin Landowner Water Quality Sites Summary Data

Figure 4-144-13: Cuyama Basin Landowner Water Quality Sites

DRAFT

4.3.4 Subsidence Monitoring

Subsidence is the sinking or downward settling of the earth's surface and is often the result of over-extraction of subsurface water. Subsidence can be directly measured in a few different methods such as with LiDAR or InSAR, Continuous Geographic Positioning System (CGPS), Extensometers, and Spirit Leveling. F

or more information, see Appendix Z in the Groundwater Conditions chapter, Appendix Z, which is a subsidence white paper contains further information about these methods and the physics behind land subsidence. The subsidence monitoring network currently described below for the Cuyama Basin assumes the use of extensometers to monitor subsidence in the Basin. However, the GSA should evaluate other methods, including LiDAR and InSAR as well during the implementation phase to identify the optimal approach.

The Basin hosts two CGPS stations with three others just outside the Basin's boundary, as shown in Figure 2.2-22. CGPS stations measure surface movement in all three axis directions; up/down, east/west, and north/south. CGPS stations are placed in the center of the Cuyama Valley to measure subsidence, while other are placed on ridges around the valley to also measure tectonic movements.

4.3.5 Surface Water Monitoring

Surface water monitoring within the Basin is conducted through stream and river gages placed along the Cuyama River or one of its tributaries. USGS manages most flow gages in California, and currently operates one active stream gage along Santa Barbara Creek. There is an additional gage (ID 11136800) along the Cuyama River downstream of the Basin before Twitchell Reservoir, however, this gage also receives water from non-Cuyama Basin watershed areas. Data for surface flow gages is obtained through the NWIS Mapping portal (USGS NWIS 2017). Existing and discontinued gages are included in Figure 4-15.

USGS has operated three additional gages within the Basin, however, two of those gages were discontinued in the 1970's. Gage ID 11136500 operated from 1945 to 1958 and was brought back into service from 2009 to 2014.

Figure 4-154-14: Cuyama Basin Streams and Rivers with Existing Gages



4.4 Monitoring Rationales

This section discusses the reasoning behind monitoring network selection. Monitoring networks in the Cuyama Basin GSP were developed to ensure that they were able to detect changes in basin conditions so that the Cuyama Basin Groundwater Sustainability Agency (CBGSA) can manage the basin to ensure the basin's sustainability goal is met, and that no undesirable results are present after 20 years of sustainable management.

The monitoring networks were selected specifically to detect short term, seasonal, and long term trends in groundwater levels and storage. The monitoring networks have been selected to include an adequate amount of temporal frequency and spatial density to evaluate information about groundwater conditions that are necessary to evaluate the effectiveness of projects and management actions undertaken by the GSA.

Explanations of how each monitoring network will be developed and implemented will be described in the projects and management actions section of the GSP as individual projects that the GSA will undertake as part of GSP implementation. The schedule and costs associated with developing and implementing each network will be discussed in the Implementation Section of the GSP.

4.5 Groundwater Level Monitoring Network

Groundwater level monitoring is conducted through a groundwater well monitoring network. This section will provide information on how the level monitoring network was developed, criteria for selecting representative wells, monitoring frequency, spatial density, summary protocols, and identification and strategies to fill data gaps.

4.5.1 Management Areas

Management Areas have not been selected at the time of writing this GSP section. Management Areas allow flexibility in establishing monitoring networks both spatially and temporally to match conditions and use in the management area. At this time, it is recommended due to the sparsity of monitored wells to use the same monitoring network selection criteria across all management areas in the basin.

4.5.2 Monitoring Wells Selected for Monitoring Network

A set of well tiering criteria were created to rank existing groundwater level measuring sites within the basin into six different tiers, shown in Figure 4-16.

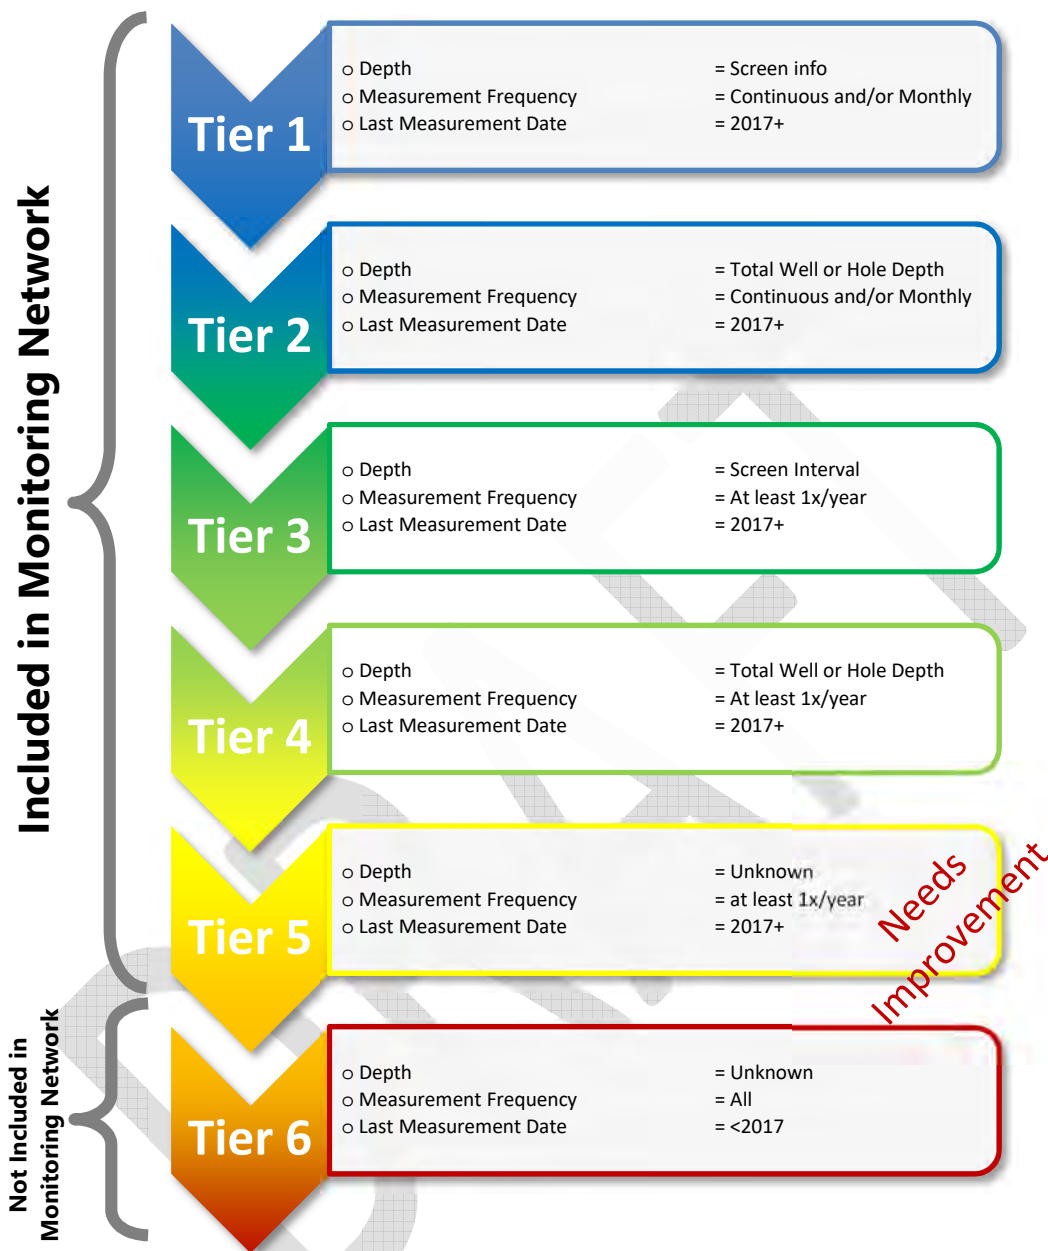


Figure 4-164-15: Cuyama Well Tiering Criteria

Tier 1 encompasses wells with the most amount of metadata as well as consistent water elevation data that are still operating and functional. As tiering levels increase, requirements around well metadata and frequency of monitoring decrease, but all the wells are still active and functioning. Tier 5 captures the remaining “active” wells, but the metadata and/or frequency of monitoring would benefit from improvement.

Tier 6 includes all other wells that are no longer operational, which are categorized as those who do not have recorded data from January 1, 2017 to August 1, 2018. This approximate two-year cut off was determined as being a reasonable amount of time for a monitoring agency or organization to obtain, log, and report well information and measurements, and as an indicator of whether a well was currently monitored or not.

Table 4-13 shows the number of monitoring wells selected from each existing monitoring ~~program data~~ maintaining entity.

Monitoring Group Data Maintaining Entity	Number of Wells Selected for Monitoring Network
CASGEM	28
USGS	43
SBCWA	30
SLOCFC&WCD	2
VCWPD	5
CCSD	1
<u>Private Landowner</u>	<u>43</u>
<u>Private Landowner Total</u>	<u>4389</u>

Note: Total does not equal sum of rows due to duplicate entries in multiple databases

Table 4-14: Number of Wells Selected for Monitoring Network

~~Thirteen percent of the CASGEM wells meet the minimum requirements for inclusion in the Cuyama Basin Monitoring Network (monitoring network) based on the metadata and the groundwater elevation measurements available for each well. Nine percent of the USGS wells meet the minimum requirements for inclusion in the Monitoring Network based on the metadata and the groundwater elevation measurements available for each well. Ninety six percent of the SBCWA wells meet the minimum requirements for inclusion in the Monitoring Network based on the metadata and the groundwater elevation measurements available for each well, included in the Monitoring Network, as can be seen in Figure 4-16. Forty three percent of the private landowner operated wells are active and included in the monitoring network. Figure 4-17 shows the Monitoring Network wells by their Tier level.~~

Figure 4-174-16: Cuyama Basin Groundwater Level and Storage Monitoring Network Wells by Tier



4.5.3 Monitoring Frequency

A successful monitoring frequency and schedule should allow the monitoring network to adequately interpret the fluctuations over time of the groundwater system based on shorter-term and long-term trends and conditions. These changes may be the result of storm events, droughts or other climatic variations, seasons, and anthropogenic activities such as pumping.

Monitoring frequency must, at a minimum, occur within the same designated time-period for all wells to ensure that measurements represent the same condition for the aquifer.

The *Monitoring Networks and Identification of Data Gaps Best Management Practices (BMP)* published by DWR provides guidance for the monitoring frequency based on the discussion presented in the *National Framework for Ground-water Monitoring in the United States (ACWI, 2013)*. This analysis and discussion provide guidance on monitoring frequency based on aquifer properties and degree of use, as shown in Table 4-15.

The guidance recommends that initial characterization of monitoring locations use frequent measurements to establish the dynamic range at each monitoring site and to identify external stresses affecting groundwater levels. An understanding of these conditions based on professional judgement should be reached before normal monitoring frequencies are followed.

Aquifer Type	Nearby Long-Term Aquifer Withdrawals		
	<i>Small Withdrawals</i>	<i>Moderate Withdrawals</i>	<i>Large Withdrawals</i>
<i>Unconfined Aquifer</i>			
“low” recharge (<5 inches/year)	Quarterly	Quarterly	Monthly
“high” recharge (>5 inches/year)	Quarterly	Monthly	Daily
<i>Confined Aquifer</i>			
“low” hydraulic conductivity (<200 feet/day)	Quarterly	Quarterly	Monthly
“high” hydraulic conductivity (>200 feet/day)	Quarterly	Monthly	Daily

Table 4-15-14: Monitoring frequency Based on Aquifer Properties and Degree of Use

The Basin is an unconfined aquifer with large withdrawals, with a “low” recharge rate of less than 5-inches per year. Based on the data in Table 4-15 provided by DWR, the Basin’s groundwater monitoring frequency should be on a monthly basis. This GSP recommends monitoring the groundwater level network monthly for the first three years of GSP implementation and consideration of reducing the monitoring frequency to quarterly measurements after that. Ideally, the monitoring network would be monitored simultaneously to gain a ‘snapshot’ of groundwater conditions. Since that is not practical monitoring of the level network should be conducted within one week for each measurement period.

4.5.4 Spatial Density

Spatial density of the monitoring network was considered both for the selection of the entire monitoring network, and for the selection of representative wells (Section 4.5.5) The goal of the groundwater level monitoring network is to provide adequate coverage of the entire aquifer within the Basin. This includes the ability to monitor and identify groundwater changes across the basin through time. Consideration of the spatial location of monitoring wells should include proximity to other monitoring wells and ~~proximity~~

ensuring adequate coverage near other prominent features such as faults or production wells. Monitoring wells in close proximity to active pumping wells could be influenced by groundwater withdrawals, thus skewing static level monitoring.

The *Monitoring Networks and Identification of Data Gaps BMP* published by DWR provides different sources and condition dependent densities to guide monitoring network implementation (Table 4-16). This information was adapted from the *CASGEM Groundwater Elevation Monitoring Guidelines* (DWR, 2010). While these estimates provide guidance to monitoring well site spatial densities, monitoring points should primarily be influenced by local geology, groundwater use, and GSP defined undesirable rates. Professional judgement is essential to determine final locations.

Reference	Monitoring Well Density (wells per 100 miles ²)
Heath (1976)	0.2-10
Sophocleous (1983)	6.3
Hopkins (1994)	
Basins pumping more than 10,000 AFY per 100 miles ²	4.0
Basins pumping between 1,000 and 10,000 AFY per 100 miles ²	2.0
Basins pumping between 250 and 1,000 AFY per 100 miles ²	1.0
Basins pumping between 100 and 250 AFY per 100 miles ²	0.7

Table 4-164-15: Monitoring Well Density Considerations

PRELIMINARY AND WILL BE UPDATED WHEN WATER BUDGET INFORMATION IS COMPLETE, it is estimated that the basin pumps approximately over 10,000 AFY per 100 square miles. The basin has 378 square miles of area. Based on Hopkins (1994), well density estimate guidelines, the Basin should have 4 monitoring wells per 100 square miles. Sophocleous (1983) recommends 6.3 monitoring wells per 100 square miles. Based on Heath (1976), the basin should have between 0.2 and 10 monitoring wells per 100 square miles. Due to the geologic and topographic variability within the basin, as well as the severity of groundwater declines and hydrogeologic uncertainty in various portions of the basin, this GSP recommends a density greater than the most conservative estimate of 10 wells per 100 square miles, which is over 38 monitoring wells.

4.5.5 Representative Monitoring

There are two categories of wells were identified within the monitoring network:

- **Representative Wells** – These wells will be used to monitor sustainability in the basin. Minimum thresholds and measurable objectives will also be calculated for these wells.
- **Monitoring Supplemental Wells** – Other wells are included in the monitoring network to provide redundancy for representative wells, and to maintain a robust network for evaluation as part of five-year GSP updates.

Representative monitoring wells were selected as part of monitoring network development. Representative monitoring wells are wells that represent conditions in the basin, and in locations that allow monitoring on the well to indicate the long term, regional changes in its vicinity.

Representative groundwater level and groundwater storage sites within each management area were selected by several different criteria. These include:

1. **Adequate Spatial Distribution** – Representative monitoring does not ~~usually~~ require the use of all wells ~~to be~~ that are spatially “clumped” together within ~~the a portion of the~~ Basin. Adequately spaced wells will provide greater Basin coverage with fewer monitoring sites.
2. **Robust and Extensive Historical Data** – representative monitoring sites with longer and more robust historical data provide insight into long-term trends that can provide information about groundwater conditions through varying climatic periods such as droughts and wet periods. Historical data may also show changes in groundwater conditions through anthropogenic effects as well. While some sites chosen may not have extensive historical data, they may still be selected because there are no wells nearby with longer records.
3. **Increased Density in Heavily Pumped Areas** – Selection of additional wells in heavily pumped areas such as in the central portion of the Basin and other agriculturally intensive areas will provide additional data where the most groundwater change occurs.
4. **Increased Density near Areas of Geologic, Hydrologic, or Topologic Uncertainty** – Having a greater density of representative wells in areas of uncertainty, such as around faults or large elevation gradients may provide insightful information about groundwater dynamics to improve management practices and strategies.
5. **Wells with Multiple Depths** – The utilization of wells with different screen intervals is important to collect data on the groundwater conditions at different elevations within the aquifer. This can be achieved by using wells with different screen depths that are close to one another, or by using multi-completion wells.
6. **Consistency with BMPs** – Using published Best Management Practices (BMPs) provided by DWR will ensure consistency across all basins and ensure compliance with established regulations.
7. **Adequate Well Construction Information** – Well information such as perforation depths, construction date, and well depth should be considered and encouraged when considering wells to be included.
8. **Professional Judgement** – Professional judgement is used to make the final decision about each well, particularly when more than one suitable well exists in an area of interest.
- 8.9. **Maximum Coverage** – Any monitoring network well that was suitable for use in the representative network was used to maximize spatial and vertical density of monitoring.

4.5.6 Groundwater Level Monitoring Network

The Groundwater Level Monitoring Network is comprised of 88 of wells within the Basin. Forty-nine of those wells are representative wells. Overall well density is 23.3 wells per 100 square miles. Figure 4-18 shows the locations of the groundwater level monitoring network monitoring wells and representative wells.

Table 4-17 includes the wells in the Groundwater Level Monitoring Network. Representative wells, those with sufficient data and representative trends within the Basin, are identified with the asterisk (*) next to the OPTI ID and are sorted first. Metadata for the wells is also included.

The proposed monitoring frequency is monthly for the first three years of GSP implementation with an option to reduce to quarterly monitoring if the CBGSA Board decides that it is appropriate. This monitoring frequency captures short term, seasonal, and long-term trends in groundwater levels. The well density of 23.3 wells per 100 square miles in the monitoring network provides a spatial density that adequately covers the primary aquifer in the Basin, and is useful for determining flow directions and hydraulic gradients as well as change in storage calculations for use in future water budgeting efforts in portions of the basin with significant land use.

DRAFT

OPTI ID	Managing Agency Data Maintaining Entity as of 2018	Well Construction Date	Well Depth (ft.)	Hole Depth (ft.)	Screen Interval	Well Elevation (ft. above MSL)	Reference Point Elevation (ft. above MSL)	First Measurement Year	Last Measurement Year	Measurement Period (yrs)	Measurement Count
2*	County of Ventura		73.0			3720		2011	2017	6	17
62*	SBCWA		212			2921		1966	2018	52	65
72*	SBCWA	1/1/1980	790	820	350 - 340 ft.	2171		1981	2018	37	114
74*	SBCWA					2193		2008	2018	10	45
77*	SBCWA	12/4/2008	980	1003.5	980 - 960 ft.	2286		2009	2018	9	47
84	SBCWA		200			2923		2008	2018	10	28
85*	SBCWA		233			3047		1950	2018	68	282
89*	VWPD	1/1/1965	125			3461		1965	2017	52	68
91*	SBCWA	9/29/2009	980	1000	980 - 960 ft.	2474		2009	2018	9	47
93*	SBCWA	10/18/1967	151	165		2928		1971	2018	47	36
95*	SBCWA	4/9/2009	805.	825.		2449		2009	2018	9	32
96*	SBCWA	2/1/1980	500			2606		1983	2018	35	61
98*	SBCWA		750.			2688		2008	2018	10	32
99*	SBCWA	9/10/2009	750	906	750 - 730 ft.	2513		2009	2018	9	43
100*	SBCWA	11/1/1988	284.	302.		3004		2010	2018	8	28
101*	SBCWA		200	220		2741		2008	2018	10	42
102*	SBCWA					2046		2010	2018	8	22
103*	SBCWA	7/23/2010	1030.	1040.		2289		2012	2018	6	25
104	Unknown		640		638.64 - 478.64 ft.	2299	2301	2008	2017	9	32
105	SLOCFCWC		Confidential 750			2374	2375	1990	2017	27	38
106*	Unknown		227.5			2327	2327	2016	2018	2	9
107*	Unknown	1/1/1950	200			2482		1950	2018	68	12
108*	Private Landowner		328.75			2629	2630	2016	2018	2	8
110	Unknown	1/1/1948	603			2046		1950	2018	68	17
112*	Unknown		441			2139		1966	2018	52	10
114*	DWR	1/1/1947	58.0			1925		1967	2017	50	9
115	Private Landowner		1200			2276	2278	2016	2018	2	4
116	Private Landowner	10/1/1980	700		700 - 240 ft.	2329	2329	1980	2018	38	6
117*	Private Landowner		212			2098	2095	2016	2018	2	10
118*	Private Landowner		500			2270	2271	2016	2018	2	11
119	DWR		92.0			1713		1955	2017	62	10
120	Private Landowner		15.4			1705	1707	2016	2017	1	2
121	Private Landowner		98.25			1984	1985	2016	2018	2	16
122	Private Landowner		63.2			2129	2131	2016	2018	2	16
123*	Private Landowner		138			2165	2167	2016	2018	2	14
124*	Private Landowner		160.55			2287	2288	1988	2018	30	22
125	Private Landowner		26			2283	2284	2016	2018	2	9
127*	Private Landowner		100.25			2364	2365	2016	2018	2	14

OPTI ID	<u>Managing Agency Data</u> <u>Maintaining Entity</u> as of 2018	Well Construction Date	Well Depth (ft.)	Hole Depth (ft.)	Screen Interval	Well Elevation (ft. above MSL)	Reference Point Elevation (ft. above MSL)	First Measurement Year	Last Measurement Year	Measurement Period (yrs)	Measurement Count
128	Unknown	3/15/1990	140.	150.		3721		2014	2017	3	8
316*	Unknown	9/29/2009	830	1000		2474		2009	2018	9	27
317*	Unknown	9/29/2009	700	1000		2474		2009	2018	9	28
322*	Unknown	4/9/2009	850	906		2513		2009	2018	9	27
324*	Unknown	9/10/2009	560	906		2513		2009	2018	9	26
325*	Unknown	9/10/2009	380	906		2513		2009	2018	9	26
420*	Unknown	12/4/2008	780	1003.5		2286		2009	2018	9	29
421*	Unknown	12/4/2008	620	1003.5		2286		2009	2018	9	29
422*	Unknown	12/4/2008	460	1003.5		2286		2009	2018	9	28
467	Unknown	1/1/1963	1140.	1215.		2224					
474*	Unknown		213			2369		1955	2017	62	6
564	Unknown	1/1/1920				2172		2017	2017	0	1
566	Unknown		500	520		2263					
568*	Unknown	1/1/1948	188	188		1905		1967	2018	51	22
571*	Private Landowner	1/1/1951	280			2307		2016	2018	3	14
573*	Unknown		404			2084		1950	2018	68	12
584	Unknown		450	606		1753		2018	2018	0	1
586	Unknown		620	622		1761					
587	Unknown	12/29/2014	900	960		1713		2018	2018	0	1
591	Unknown		720	740		1715		2017	2018	1	2
597	Unknown		390	670		1694		2017	2018	1	2
601	Private Landowner	6/14/1905	723		723 - 338 ft.	2074		1993	2017	24	32
602	Private Landowner	6/12/1905	725		725 - 325 ft.	2114		1992	2017	25	29
603	Private Landowner	6/15/1905	800		800 - 398 ft.	2097		1994	2017	23	33
604*	Private Landowner		924		924 - 454 ft.	2125		1995	2017	22	28
608*	Private Landowner	6/10/1905	745		745 - 440 ft.	2224		1995	2017	22	26
609*	Private Landowner	6/15/1905	970		970 - 476 ft.	2167		1995	2017	22	31
610*	Private Landowner		780		780 - 428 ft.	2442		1995	2017	22	27
612*	Private Landowner		1070		1070 - 657 ft.	2266		1995	2017	22	24
613*	Private Landowner		830		830 - 330 ft.	2330		1995	2017	22	24
614	Private Landowner		745		745 - 405 ft.	2337		1995	2017	22	25
615*	Private Landowner		865		865 - 480 ft.	2327		1995	2017	22	22
618	Private Landowner	6/18/1905	927		927 - 496 ft.	2163		1996	2017	21	31
619	Private Landowner	6/19/1905	1040		1040 - 569 ft.	2307		1997	2017	20	28
620*	Private Landowner	6/19/1905	1035		1035 - 550 ft.	2432		1997	2017	20	25
621	Private Landowner	6/19/1905	974		974 - 540 ft.	2126		1998	2017	19	30
623	Private Landowner	6/21/1905	1040		1040 - 530 ft.	2288		1999	2017	18	29
627	Private Landowner	6/23/1905	960		960 - 460 ft.	2279		2001	2017	16	19
628	Private Landowner	5/31/1905	941		941 - 593 ft.	2388		1978	2017	39	32

OPTI ID	<u>Managing Agency Data</u> <u>Maintaining Entity</u> as of 2018	Well Construction Date	Well Depth (ft.)	Hole Depth (ft.)	Screen Interval	Well Elevation (ft. above MSL)	Reference Point Elevation (ft. above MSL)	First Measurement Year	Last Measurement Year	Measurement Period (yrs)	Measurement Count
629*	Private Landowner		1000		1000 - 500 ft.	2379		2005	2017	12	13
630	Private Landowner		900		900 - 360 ft.	2371		1991	2017	26	22
631	Private Landowner	5/31/1905	960		960 - 600 ft.	2367		1986	2017	31	22
633*	Private Landowner		1000		1000 - 500 ft.	2364		1998	2017	19	23
635	Private Landowner		1050		1050 - 549 ft.	2356		2003	2017	14	10
636	Private Landowner	5/27/1905	924		924 - 474 ft.	2348		1975	2017	42	15
637	Private Landowner	6/30/1905	980		980 - 540 ft.	2110		2009	2017	8	10
638	Private Landowner	6/30/1905	1006		1006 - 526 ft.	2437		2008	2017	9	9
640	Private Landowner	6/30/1905	840		840 - 400 ft.	2239		2008	2017	9	16
641	Private Landowner	7/2/1905	800		800 - 360 ft.	2204		2010	2017	7	7
642	Private Landowner	7/2/1905	1000		1000 - 550 ft.	2232		2010	2017	7	8
644	Private Landowner	7/5/1905	950		950 - 490 ft.	2143		2013	2017	4	10

Table 4-174-16: Wells included in the Groundwater Levels and Storage Monitoring Network

Figure 4-17: Groundwater Level and Storage Representative Wells and other Monitoring Network Wells



4.5.7 Monitoring Protocols

Monitoring protocols for the groundwater level monitoring network are included in Appendix K.

4.5.8 Data Gaps

Groundwater levels monitoring data gaps ~~are result from poor~~ ~~the result of two monitoring characteristics:~~ Spatial distribution of ~~the available~~ wells and a lack of well construction information.

The spatial distribution of the groundwater levels monitoring network provides coverage of the majority of the Basin. ~~However, T~~there are several areas, identified by the red ovals in Figure 4-19, that do not have adequate monitoring. Additional monitoring wells added in these areas ~~would~~ provide more information that can be used to detect changes in conditions in the basin.

Well construction information is not available for many wells within the Basin. Monitoring wells with construction information featuring total depth and screened interval are preferred, because that information is useful in understanding what monitoring measurements mean in terms of basin conditions at different depths.

4.5.9 Plan to fill data gaps

This GSP ~~has identified~~ identifies a number of activities to increase the robustness of the groundwater level monitoring network.

The CBGSA has ~~already~~ been awarded a Proposition 1 Category 1 Grant ~~Fund~~, which includes a task to expand the groundwater level monitoring network. This task includes identification of additional monitoring wells for hand measurements as well as installation of continuous monitoring equipment into ten existing wells, which can be used to augment the existing monitoring network. This task will both increase the spatial coverage of the monitoring network and the temporal coverage in the wells with additional continuous monitoring.

The Cuyama Basin GSA has applied for assistance from DWR's ~~provides~~ Technical Support Services (TSS), which ~~provides to~~ support GSAs as they develop GSPs. Opportunities within the TSS include the installation of new monitoring wells and downhole video logging. New wells drilled by DWR's TSS will improve the density and sampling frequency for level monitoring within the Basin. Downhole video logging will provide more well construction information to better utilize well data within the Basin. As of this writing, the DWR TSS program has not provided any TSS services for the Cuyama Basin.

Figure 4-194-18: Groundwater Levels Monitoring Network Data Gap Areas



4.6 Groundwater Storage Monitoring Network

Groundwater in storage is monitored through the measurement of groundwater levels. Therefore, the ~~Groundwater-groundwater~~ storage monitoring network will use the groundwater level monitoring network. Thresholds for groundwater storage will be discussed in Section 5.

4.7 Seawater Intrusion Monitoring Network

The Cuyama Groundwater Basin is geographically and geologically isolated from the Pacific Ocean and any other large source of saline water. Thus, the Basin is not at risk for seawater intrusion. ~~salinity~~ Salinity is monitored as part of the groundwater quality network, but seawater intrusion is not a concern for the Basin.

4.8 Degraded Groundwater Quality Monitoring Network

~~Salinity (measured as TDS), arsenic, and nitrates have all been identified by local stakeholders as potentially being of concern for water quality in the Basin. However, as noted in the Groundwater Conditions section, there have only been two nitrate measurements and three fewer than ten arsenic measurements in recent years that exceeded MCLs. In the case of arsenic, all of the high concentration measurements have been taken either at CCSD Well #2 (which is no longer in operation) or at groundwater depths of greater than 700 feet, outside of the range of pumping for drinking water. Furthermore, unlike with salinity, there is no evidence to suggest a causal nexus between potential-GSP actions under the GSA's authority and arsenic or salinity. Therefore~~ Due to the relationship of undesirable results for water quality and the causal nexus of groundwater quality and GSP actions, the groundwater quality network ~~is~~ has been established to monitor for salinity ~~(measured as TDS)~~ but does not include arsenic or nitrates at this time.

4.8.1 Management Areas

Management Areas have not been selected at the time of writing this GSP section. Management Areas allow flexibility in establishing monitoring networks both spatially and temporally to match conditions and use in the management area. At this time, it is recommended due to the sparsity of monitored sites to use the same monitoring network selection criteria across all management areas in the basin.

4.8.2 Monitoring Sites Selected for Monitoring Network

Table 4-17 lists the monitoring sites selected for the groundwater quality monitoring network by monitoring group. Monitoring sites selected for inclusion into the network were monitored within the years of 2008-2018. Many additional monitoring sites have been monitored for salinity, however, they were not monitored in the last 10 years, indicating that they are unlikely to be monitored again by that monitoring agency. Note that due to duplication of wells being in both USGS and DWR's networks, the total number of selected groundwater quality networks wells (64) is less than the sum of wells shown in Note: Total does not equal sum of rows due to duplicate entries in multiple databases

Table 4-18.

Monitoring Data Maintaining Entity Group	Number of Wells Selected for Monitoring Network
NWQC, USGS, IRLPILRP	43
GAMA, DWR	20
BCWPD	7
Private Landowner	11
Total	64

Note: Total does not equal sum of rows due to duplicate entries in multiple databases

Table 4-18: Groundwater Quality Monitoring Sites by Source

4.8.3 Monitoring Frequency

The Basin, in coordination with partnering agencies, will compile salinity samples once a year, as is consistently practiced by USGS.

Monitoring agencies such as the USGS and DWR were contacted to inquire about when they would next monitor their sites for groundwater quality, including salinity. The agencies communicated that they ‘usually’ monitor annually, but the timing of that monitoring is not set and changes from year to year. Additionally, depending on funding and staff availability, there may be years where no groundwater quality monitoring is conducted by an agency.

Although DWR does not provide specific recommendations on the frequency of monitoring in relationship to aforementioned groundwater characteristics, however, concentrations of groundwater quality, especially salinity, do not fluctuate significantly throughout a year to require multiple samples per year. The Basin, in coordination with partnering agencies, will compile salinity samples once a year, as is consistently practiced by USGS.

4.8.4 Spatial Density

DWR’s *Monitoring Networks and Identification of Data Gaps BMP* states “The spatial distribution must be adequate to map or supplement mapping of known contaminants.” Using this guidance, professional judgement was used to identify representative wells within each management area. Heavily pumped areas, such as the central portion of the Basin, require additional monitoring sites, while areas of lower pumping or less agricultural or municipal groundwater use need less monitoring.

Any well measured since from -2008 to June 2018 was included in the Monitoring Network. The entire Monitoring Network was selected as representative monitoring. The selected groundwater quality representative and monitoring wells provide adequate coverage of the Basin’s aquifer. The groundwater quality monitoring network is composed of 64 of wells within the Basin. Providing a monitoring site density of 17 sites per 100 square miles. This significantly exceeds the density recommended by reference materials for groundwater level density shown in Table 4-16.

4.8.5 Representative Monitoring

Representative monitoring sites were selected for groundwater quality using the considerations used to select representative groundwater level monitoring wells (Section 4.5.5). Due to the uncertainty of the monitoring frequency, all monitoring network wells were selected to be representative wells in the Groundwater Quality Monitoring Network.

DRAFT

4.8.6 Groundwater Quality Monitoring Network

Figure 4-20 shows the groundwater quality monitoring network and representative and monitoring sites. The Groundwater Quality Monitoring Network is comprised of 64 wells within the Basin, all of which are representative wells.

Table 4-19 shows the wells in the groundwater quality monitoring network. Metadata for the wells is also included.

DRAFT

OPTI ID	Managing Agency as of 2018	Well Construction Date	Well Depth	Hole Depth	Screen Interval	Well Elevation	First Measurement Date	Last Measurement Date	Measurement Period (years)	Measurement Count
61*	Department of Water Resources		357.		Unknown	3681	2008-09-25	2008-09-25	0	3
72*	Santa Barbara County Water Agency	1/1/1980	790	820	340 to 350 ft.	2171	2008-09-15	2017-07-14	9	13
73*	Santa Barbara County Water Agency	8/26/1982	880.	1021.	Unknown	2252	2010-08-03	2011-07-12	1	2
74*	Santa Barbara County Water Agency				Unknown	2193	2008-09-17	2017-07-13	9	11
76*	USGS	9/1/1960	720		Unknown	2277	1960-09-22	2008-09-17	48	10
77*	Santa Barbara County Water Agency	12/4/2008	980	1003.5	960 to 980 ft.	2286	2009-04-08	2009-04-08	0	1
79*	USGS		600	750	Unknown	2374	2008-07-08	2011-08-11	3	7
81*	USGS		155.		Unknown	2698	2011-08-16	2011-08-16	0	1
83*	Santa Barbara County Water Agency	1/1/1972	198.		Unknown	2858	2011-08-16	2011-08-16	0	1
85*	Santa Barbara County Water Agency		233		Unknown	3047	1964-02-07	2011-07-12	47	46
86*	USGS	1/1/1995	230.		Unknown	3141				0
87*	USGS		232.		Unknown	3546				0
88*	USGS	9/4/2007	400	400.	Unknown	3549	2011-08-18	2011-08-18	0	1
90*	Santa Barbara County Water Agency	8/8/2006	800	800	Unknown	2552	2008-09-17	2012-09-20	4	6
91*	Santa Barbara County Water Agency	9/29/2009	980	1000	960 to 980 ft.	2474	2009-11-05	2009-11-05	0	1
94*	USGS		550	720	Unknown	2456	2008-07-29	2010-07-29	2	6
95*	Santa Barbara County Water Agency	4/9/2009	805.	825.	Unknown	2449	2011-08-19	2011-08-19	0	1
96*	Santa Barbara County Water Agency	2/1/1980	500		Unknown	2606	2011-08-19	2011-08-19	0	1
98*	Santa Barbara County Water Agency		750.		Unknown	2688	2011-08-16	2011-08-16	0	1
99*	Santa Barbara County Water Agency	9/10/2009	750	906	730 to 750 ft.	2513	2009-11-04	2009-11-04	0	1
101*	Santa Barbara County Water Agency		200	220	Unknown	2741	2008-09-25	2008-09-25	0	3
102*	Santa Barbara County Water Agency				Unknown	2046	2011-08-15	2017-07-13	6	7
130*	USGS				Unknown	3536	2011-08-19	2011-08-19	0	1
131*	USGS				Unknown	2990	2011-08-17	2011-08-17	0	1
157*	USGS		71.0		Unknown	3755				0
196*	USGS		741	755	Unknown	3117				
204*	USGS	1/1/1935			Unknown	3693	2011-08-18	2011-08-18	0	1
226*	USGS	1/1/1971		220.	Unknown	2945	2011-08-18	2011-08-18	0	1
227*	USGS				Unknown	3002	1966-07-01	2011-08-17	45	2
242*	USGS		155	187	Unknown	2933	2012-07-18	2012-07-18	0	1
269*	USGS	1/1/1951			Unknown	2756	2008-09-16	2008-09-16	0	3
309*	USGS	2/2/1980	1100	1100	Unknown	2513	2011-08-11	2011-08-11	0	1
316*	USGS	9/29/2009	830	1000	Unknown	2474	2009-11-05	2009-11-05	0	1
317*	USGS	9/29/2009	700	1000	Unknown	2474	2009-11-05	2009-11-05	0	1
318*	USGS	9/29/2009	610	1000	Unknown	2474	2009-11-04	2009-11-04	0	1
322*	USGS	4/9/2009	850	906	Unknown	2513	2009-11-03	2009-11-03	0	1
324*	USGS	9/10/2009	560	906	Unknown	2513	2009-11-04	2009-11-04	0	1
325*	USGS	9/10/2009	380	906	Unknown	2513	2009-11-04	2009-11-04	0	1
400*	USGS		2120.	2200.	Unknown	2298	1958-05-26	2011-08-15	53	8
420*	USGS	12/4/2008	780	1003.5	Unknown	2286	2009-04-07	2009-04-07	0	1
421*	USGS	12/4/2008	620	1003.5	Unknown	2286	2009-04-07	2009-04-07	0	1
422*	USGS	12/4/2008	460	1003.5	Unknown	2286	2009-04-08	2009-04-08	0	1
424*	USGS		1000.	1020.	Unknown	2291	2011-08-15	2011-08-15	0	1
467*	USGS	1/1/1963	1140.	1215.	Unknown	2224	2012-07-18	2017-07-13	5	6
568*	USGS	1/1/1948	188	188	Unknown	1905	2008-09-15	2008-09-15	0	3

OPTI ID	Managing Agency as of 2018	Well Construction Date	Well Depth	Hole Depth	Screen Interval	Well Elevation	First Measurement Date	Last Measurement Date	Measurement Period (years)	Measurement Count
702*	USGS				Unknown	3539				
703*	USGS				Unknown	1613				
710*	DWR				Unknown	2942				
711*	DWR				Unknown	1905				
712*	DWR				Unknown	2171				
713*	DWR				Unknown	2456				
721*	DWR				Unknown	2374				
758*	DWR				Unknown	3537				
840*	Private Landowner	11/21/2014	900		200 to 880 ft.	1713				
841*	Private Landowner	12/12/2014	600		170 to 580 ft.	1761				
842*	Private Landowner	12/19/2014	450		60 to 430 ft.	1759				
843*	Private Landowner	1/5/2015	620		60 to 600 ft.	1761				
844*	Private Landowner	7/17/2015	730		100 to 720 ft.	1713				
845*	Private Landowner	7/12/2015	380		100 to 360 ft.	1712				
846*	Private Landowner	6/15/2015	610		130 to 590 ft.	1715				
847*	Private Landowner	7/26/2015	600		180 to 580 ft.	1733				
848*	Private Landowner	6/30/2015	390		110 to 370 ft.	1694				
849*	Private Landowner	6/23/2015	570		150 to 550 ft.	1713				
850*	Private Landowner	8/13/2015	790		180 to 780 ft.	1759				

Table 4-194-18: Wells Included in the Groundwater Quality Monitoring Network

Figure 4-204-19: Cuyama Basin Groundwater Quality Monitoring Network Wells

4.8.7 Monitoring Protocols

~~Existing groundwater quality monitoring programs use their agency's specific monitoring protocols.~~

For recommended additional monitoring recommended in Section 4.8.9, the monitoring protocols will use DWR's *Monitoring Networks and Identification of Data Gaps BMP* which cites the USGS's 1995 publication *Ground-Water Data-Collection Protocols and Procedures for the National Water-Quality Assessment Program: Collection and Documentation of Water-Quality Samples and Related Data* (Appendix A) for the groundwater quality sampling protocols. This publication includes protocols for equipment selection, setup, use, field evaluation, sample collection techniques, sample handling, and sample testing, and is included in Appendix L.

4.8.8 Data Gaps

Groundwater quality monitoring data gaps have three components:

- Spatial distribution of the wells
- Well/measurement depths for three-dimensional constituent mapping
- Temporal sampling

The spatial distribution of the groundwater quality monitoring network provides coverage of several portions of the Basin. There are several areas, identified by the red ovals in Figure 4-21, that do not have adequate monitoring. Additional sampling taken within these identified areas will provide more information about salinity in the indicated locations.

Well construction of wells used in existing salinity sampling efforts is mostly unknown, and the depth of the water used for sampling is not known at most monitoring sites. Additional information about how salinity may change at different depths in the aquifer would be valuable, and requires samples from wells with construction information.

Water quality sampling is currently performed at an insufficient time interval throughout tThe entire Basin, and therefore the entire Basin is identified as a groundwater quality monitoring temporal data gap. Management entities within the Basin responsible for groundwater quality sampling were contacted by a GSA representative in September 2018, to understand the timing of current monitoring schedules, and whether those management entities were intending to continue quality monitoring in the future. The GSP assumes that aAll management entities are anticipating continuing with groundwater quality sampling within the Basin, but this will need to be confirmed, as well as the anticipated schedule of the sampling was unknown by each entity.

4.8.9 Plan to fill data gaps

The CBGSA will fill the temporal and spatial data gaps by implementing its own salinity sampling program, and will fill the well construction knowledge gap at least partially by using DWR's TSS program to perform downhole logging of a subset of wells.

The CBGSA will develop and perform a project to perform annual monitoring of salinity in the basin. This new monitoring program will focus on using wells that have both construction information and pumps installed. Details of the new monitoring program, such as the targeted number and distribution of sampling sites will be detailed as a project in the projects and management actions section of this GSP (Section 6).

DWR provides Technical Support Services (TSS) to support GSAs as they develop GSPs. Downhole video logging performed by the TSS program in existing salinity monitoring wells ~~will~~ could provide more well construction information to better utilize well data within the Basin.

Figure 4-214-20: Identification of Groundwater Quality Monitoring Data Gaps

4.9 Land Subsidence Monitoring Network

4.9.1 Management Areas

Management Areas have not been selected at the time of writing this GSP section. Management Areas allow flexibility in establishing monitoring networks both spatially and temporally to match conditions and use in the management area. At this time, it is recommended due to the sparsity of monitored sites to use the same monitoring network selection criteria across all management areas in the basin.

4.9.2 Monitoring Sites Selected for Monitoring Network

There are currently two subsidence monitoring stations within the Basin, and three outside of the Basin. Figure 4-22 shows the locations of existing subsidence monitoring stations, which make up the current subsidence monitoring network. The two stations within the Basin, Sites CUHS and VCST are both included in the monitoring network because they are active and provide Basin specific data. The three stations located outside of the Basin, Sites P521, BCWR, and OZST, are also included in the monitoring network. These stations are important to understand the general dynamic movement trends of the Basin because they detect tectonic movement in the area of the Basin.

4.9.3 Monitoring Frequency

Subsidence monitoring frequencies should capture long-term and seasonal fluctuations in ground level changes. DWR's *Monitoring Networks and Identification of Data Gaps BMP* does not provide specific monitoring frequency or interval guidance. However, CGPS stations allow for data sampling to be taken several times a minute, more than enough for seasonal fluctuations to be captured in the data. Long-term trends are easily compiled from continuous data. Therefore, the GSA will utilize the same monitoring frequency currently used by the CGPS stations.

4.9.4 Spatial Density

Because there are currently only two monitoring stations, the current spatial density of subsidence monitoring stations within the basin is 0.5 stations per 100 miles². These stations are included in Figure 4-22. DWR's *Monitoring Networks and Identification of Data Gaps BMP* does not provide specific spatial density guidelines for subsidence monitoring networks, and thus relies on professional judgment on site identification. Current stations, in and outside of the basin, do not adequately cover the Basin to capture subsidence variations. Potential areas for new stations are discussed further in the following sections.

Figure 4-224-24: Current Subsidence Monitoring Stations In and Around the Cuyama Basin

4.9.5 Monitoring Protocols

DWR's provided *Monitoring Networks and Identification of Data Gaps GMP* does not provide specific monitoring protocols for subsidence monitoring networks. CGPS station measurements are logged digitally, and depending on the station and network setup, either require downloading at the physical station site or are uploaded automatically to a server. Data management will also depend on the monitoring agency. Current operating stations will continue to be managed by their current entity, and the GSA will be responsible for downloading data on a fixed schedule. The additional of nNew stations will require procedures for downloading and storing the data as ~~equipment storage or need requires and~~ and for providing quality assurance review of the data.

Data should be saved in the Cuyama Basin data management system on a regular annual schedule. All data should be reviewed for quality and logged appropriately.

4.9.6 Data Gaps

New subsidence monitoring sites should be chosen to provide data on areas most at risk for land subsidence. Six potential new site locations were identified within the Basin, as shown in Figure 4-23. These locations were identified by focusing on the areas with significant or new groundwater pumping that did not currently have subsidence monitoring nearby.

- A. Identified as an area with relatively new and increased agricultural activity and pumping with no nearby stations.
- B. Identified because there are currently no nearby stations and the Russell Fault bisects this area.
- C. Identified because of the CCSD and proximity to the heavily pumped central portion of the Basin.
- D. Identified because this is the most heavily pumped portion of the Basin and there are currently no nearby stations.
- E. Identified because of its proximity to the heavily pumped portion of the Basin, on the north facing slope of the valley. Additionally, there are currently no stations nearby.
- F. Identified because this is the transition into the heavily pumped central portion of the Basin near current agricultural pumping. This is also an area with faults.

4.9.7 Plan to fill data gaps

New monitoring sites should be located near areas with the greatest groundwater pumping, or where pumping is new. This is because pumping is the primary driving force for subsidence with the Basin. Although there are multiple ways to measure subsidence, CGPS stations are likely the best option for the Basin. CGPS stations are relatively low cost when compared to labor intensive land surveys, construction of borehole extensometers, and frequent satellite data processing. CGPS stations require comparatively little maintenance and provide continuous information allowing detailed land subsidence analysis.

Increasing data collection on subsidence for the Basin requires the addition of several new CGPS stations. These stations can be managed solely by the GSA or can be incorporated into CORS via coronation with USGS. Site selection, equipment, and management will require coordination with USGS

Figure 4-234-22: Subsidence Monitoring Location Data Gap Areas

4.10 Depletions of Interconnected Surface Water Monitoring Network

Monitoring Networks for depletions of surface water cannot be developed until the numerical modeling effort can inform the GSP about the amounts and locations of depletions. This section will be added prior to plan completion.

References

- Belitz, Kenneth, Dubrovsky, N.M., Burow, Karen, Jurgens, Bryant, and Johnson, Tyler, 2003, Framework for a ground-water quality monitoring and assessment program for California: U.S. Geological Survey Water-Resources Investigations Report 03-4166, 78 p.
<https://pubs.usgs.gov/wri/wri034166/pdf/wri034166.pdf>
- California Department of Water Resources (DWR), 2010. *California statewide groundwater elevation monitoring (CASGEM) groundwater elevation monitoring guidelines*, December, 36 p.
<http://www.water.ca.gov/groundwater/casgem/documents.cfm>
- California Department of Water Resources, *CASGEM Online System*. Last modified date 7/19/2018. Accessed 1/19/2018.
[https://www.casgem.water.ca.gov/OSS/\(S\(231avqzxyuptks5zc1sgaalp\)\)/Default.aspx?ReturnUrl=%2fOSS%2fGIS%2fPopViewMap.aspx%3fPublic%3dY&Public=Y](https://www.casgem.water.ca.gov/OSS/(S(231avqzxyuptks5zc1sgaalp))/Default.aspx?ReturnUrl=%2fOSS%2fGIS%2fPopViewMap.aspx%3fPublic%3dY&Public=Y)
- California Department of Water Resources, *CASGEM: What is CASGEM?*. Accessed 8/29/2018.
<https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/CASGEM/Files/CASGEM-Brochure---What-is-CASGEM.pdf>
- California Department of Water Resources (DWR), *Groundwater Ambient Monitoring and Assessment Program (GAMA)*. 2018, Accessed 8/29/2018.
https://www.waterboards.ca.gov/water_issues/programs/gama/about.html
- California Department of Water Resources (DWR), *Groundwater Monitoring (CASGEM)*. 2018.
<https://water.ca.gov/Programs/Groundwater-Management/Groundwater-Elevation-Monitoring--CASGEM>
- California Department of Water Resources (DWR), *Irrigated Land Regulatory Program (IRLP/ILRP)*, Accessed 8/29/2018. https://www.waterboards.ca.gov/centralvalley/water_issues/irrigated_lands/
- California Department of Water Resources (DWR), *Irrigated Land Regulatory Program (ILRRLP)-Surface Water Quality, Data: California Environmental Data Exchange Network (CEDEN)*, Accessed 8/29/2018.
https://www.waterboards.ca.gov/centralvalley/water_issues/irrigated_lands/water_quality/surface_water_quality_data/
- Heath, R.C., 1976. *Design of ground-water level observation-well programs: Ground Water, V. 14, no. 2, p. 71-77.*

- Hopkins, J., 1994. *Explanation of the Texas Water Development Board groundwater level monitoring program and water-level measuring manual*: UM-52, 53 p.
<http://www.twdb.texas.gov/groundwater/docs/UMs/UM-52.pdf>
- Koterba, M.T., Wilde, F.D., and Lapham, W.W., 1995, Ground-water data-collection protocols and procedures for the National Water-Quality Assessment Program: Collection and documentation of water-quality samples and reload data: U.S. Geological Survey Open-File Report 95-399, 113 p.
<https://pubs.usgs.gov/of/1995/ofr-95-399/pdf/of95-399.pdf>
- National Water Quality Monitoring Council (NWQMC), *About Us*. Accessed 8/29/2018.
https://acwi.gov/monitoring/about_the_council.html
- Sophocleous, M., 1983, *Groundwater observation network design for the Kansas groundwater management districts. USA*: Journal of Hydrology, vol.61, pp 371-389. Heath, R.C., 1976.
Design of ground-water level observation-well programs: Ground Water, V. 14, no. 2, p. 71-77.
- Subcommittee on groundwater of the advisory committee on water information, 2013. A national Framework for Ground-Water Monitoring in the United States, 168 p.
http://acwi.gov/sogw/ngwmn_framework_report_july2013.pdf
- United States Geological Survey (USGS) National Water Information System (NWIS), 2012, Last Updated: 9 November 2017. Downloaded: 16 July 2018.
<https://maps.waterdata.usgs.gov/mapper/index.html>

Appendix A - Monitoring Protocols BMP

Appendix B - Water Quality Monitoring Standards From USGS

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan Monitoring Networks Draft

Prepared by:



January 2019

Chapter 4 Monitoring Networks

This section of the Cuyama Basin Groundwater Sustainability Plan (GSP) discusses the planned monitoring networks needed to guide the GSP’s path to sustainability. Monitoring networks need to be established for each sustainability indicator either directly or through monitoring through a proxy. This section satisfies Subarticle 4 of the Sustainable Groundwater Management Act Regulations. This section discusses the objectives of the monitoring networks, existing monitoring networks used in the development of each network, and establishes a monitoring network for each sustainability indicator. Data gaps and a plan to fill data gaps if they are present are provided for each monitoring network.

This section does not include information about basin settings, undesirable results, sustainability thresholds, water budget information, or projects and management actions.

Table of Contents

Chapter 4 Monitoring Networks	4-2
Acronyms.....	4-6
4.1 Useful Terms.....	4-8
4.2 Monitoring Network Objectives.....	4-9
4.2.1 Basin Conditions Relevant to Measurement Density and Frequency.....	4-10
4.3 Existing Monitoring Used.....	4-12
4.3.1 Groundwater Level Monitoring.....	4-12
4.3.2 Overlapping and Duplicate Data.....	4-27
4.3.3 Groundwater Quality Monitoring (Combine Existing Programs).....	4-27
4.3.4 Subsidence Monitoring.....	4-38
4.3.5 Surface Water Monitoring.....	4-38
4.4 Monitoring Rationales.....	4-40
4.5 Groundwater Level Monitoring Network.....	4-40
4.5.1 Management Areas.....	4-40
4.5.2 Monitoring Wells Selected for Monitoring Network.....	4-40
4.5.3 Monitoring Frequency.....	4-44
4.5.4 Spatial Density.....	4-44
4.5.5 Representative Monitoring.....	4-45
4.5.6 Groundwater Level Monitoring Network.....	4-46
4.5.7 Monitoring Protocols.....	4-52

4.5.8	Data Gaps.....	4-52
4.5.9	Plan to fill data gaps.....	4-52
4.6	Groundwater Storage Monitoring Network.....	4-54
4.7	Seawater Intrusion Monitoring Network.....	4-54
4.8	Degraded Groundwater Quality Monitoring Network.....	4-54
4.8.1	Management Areas.....	4-54
4.8.2	Monitoring Sites Selected for Monitoring Network.....	4-54
4.8.3	Monitoring Frequency.....	4-55
4.8.4	Spatial Density.....	4-55
4.8.5	Representative Monitoring.....	4-55
4.8.6	Groundwater Quality Monitoring Network.....	4-56
4.8.7	Monitoring Protocols.....	4-60
4.8.8	Data Gaps.....	4-60
4.8.9	Plan to fill data gaps.....	4-60
4.9	Land Subsidence Monitoring Network.....	4-62
4.9.1	Management Areas.....	4-62
4.9.2	Monitoring Sites Selected for Monitoring Network.....	4-62
4.9.3	Monitoring Frequency.....	4-62
4.9.4	Spatial Density.....	4-62
4.9.5	Monitoring Protocols.....	4-64
4.9.6	Data Gaps.....	4-64
4.9.7	Plan to fill data gaps.....	4-64
4.10	Depletions of Interconnected Surface Water Monitoring Network.....	4-66

List of Figures

Figure 4-1: Well Completion Diagram.....	4-9
Figure 4-2: Central Basin with Combined Hydrograph	4-11
Figure 4-3: Cuyama GW Basin Wells with Monitoring Data Provided by DWR	4-14
Figure 4-4: Cuyama GW Basin Wells with Monitoring Data Provided by USGS.....	4-16
Figure 4-5: Cuyama GW Basin Wells with Monitoring Data Provided by SBCWA.....	4-18
Figure 4-6: Cuyama GW Basin Wells with Monitoring Data Provided by SLOCFC&WCD .	4-20
Figure 4-7: Cuyama GW Basin Wells with Monitoring Data Provided by VCWPD.....	4-22
Figure 4-8: Cuyama GW Basin Wells with Monitoring Data Provided by CCSD.....	4-24
Figure 4-9: Cuyama GW Basin Wells with Monitoring Data Provided by Private Landowners	4-26
Figure 4-10: Cuyama Basin NWQMC, USGS, ILRP Water Quality Monitoring Sites.....	4-29
Figure 4-11: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites.....	4-31
Figure 4-12: Cuyama Basin CCSD Water Quality Monitoring Site.....	4-33
Figure 4-13: Cuyama Basin VCWPD Water Quality Sites	4-35
Figure 4-14: Cuyama Basin Landowner Water Quality Sites	4-37
Figure 4-15: Cuyama Basin Streams and Rivers with Existing Gages.....	4-39
Figure 4-16: Cuyama Well Tiering Criteria	4-41
Figure 4-17: Cuyama Basin Groundwater Level and Storage Monitoring Network Wells by Tier	4-43
Figure 4-18: Groundwater Level and Storage Representative Wells and other Monitoring Network Wells.....	4-51
Figure 4-19: Groundwater Levels Monitoring Network Data Gap Areas	4-53
Figure 4-20: Cuyama Basin Groundwater Quality Monitoring Network Wells	4-59
Figure 4-21: Identification of Groundwater Quality Monitoring Data Gaps.....	4-61
Figure 4-22: Current Subsidence Monitoring Stations In and Around the Cuyama Basin	4-63
Figure 4-23: Subsidence Monitoring Location Data Gap Areas.....	4-65

List of Tables

Table 4-1: Cuyama Basin Monitoring Well Information Provided by CASGEM	4-13
Table 4-2: Cuyama Basin Monitoring Well Information Provided by USGS.....	4-15
Table 4-3: Cuyama Basin Monitoring Well Information Provided by SBCWA	4-17
Table 4-4: Cuyama Basin Monitoring Well Information Provided by SLOCFC&WCD	4-19
Table 4-5: Cuyama Basin Monitoring Well Information Provided by VCWPD.....	4-21
Table 4-6: Cuyama Basin Monitoring Well Provided Information by CCSD	4-23
Table 4-7: Cuyama Basin Monitoring Well Information Provided by Private Landowners	4-25
Table 4-8: Well Identification Matrix	4-27
Table 4-9: Cuyama Basin NWQMC, USGS, ILRP Water Quality Monitoring Sites Summary Statistics	4-28
Table 4-10: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites Summary Statistics	4-30
Table 4-11: Cuyama Basin CCSD Water Quality Site Summary Data	4-32
Table 4-12: Cuyama Basin VCWPD Water Quality Sites Summary Data	4-34
Table 4-13: Cuyama Basin Landowner Water Quality Sites Summary Data	4-36
Table 4-14: Number of Wells Selected for Monitoring Network	4-42
Table 4-15: Monitoring frequency Based on Aquifer Properties and Degree of Use	4-44
Table 4-16: Monitoring Well Density Considerations	4-45
Table 4-17: Wells included in the Groundwater Levels and Storage Monitoring Network.	4-50
Table 4-18: Groundwater Quality Monitoring Sites by Source.....	4-55
Table 4-19: Wells Included in the Groundwater Quality Monitoring Network	4-56

Acronyms

ACWI	Advisory Committee on Water Information
AFY	Acre feet per year
ARS	Agricultural Research Service
Basin	Cuyama Valley Groundwater Basin
BMP	Best Management Practices
CA	California
CASGEM	California Statewide Groundwater Elevation Monitoring
CBGSA	Cuyama Basin Groundwater Sustainability Agency
CBWD	Cuyama Basin Water District
CCSD	Cuyama Community Services District
CEDEN	California Environmental Data Exchange Network
CGPS	CGPS
DWR	California Department of Water Resources
EPA	Environmental Protection Agency
GAMA	Groundwater Ambient Monitoring and Assessment
GICIMA	Groundwater Information Center Interactive Map
GSA	Groundwater Sustainability Agency
ILRP	Irrigated Lands Regulatory Program
MSC	Master Site Code
msl	mean sea level
NWIS	National Water Information System
NGWMN	National Ground-Water Monitoring Network
NWQMC	National Water Quality Monitoring Council
SBCWA	Santa Barbara County Water Agency
SLOCFC&WCD	San Luis Obispo County Flood Control & Water Conservation District
SWN	State Well Number
TSS	Technical Services Support
USGS	United States Geological Survey
VCWPD	Ventura County Water Protection District

WDL

Water Data Library

4.1 Useful Terms

The monitoring networks section includes descriptions of groundwater wells, water quality measurements, subsidence stations, and other related components. A list of technical terms and a description of the terms are listed below. Figure 4-1 shows a diagram of a monitoring well with well related terms identified on the diagram. The terms and their descriptions are identified here to guide readers through the section and are not a definitive definition of each term:

- Well related terms:
 - **Ground Surface Elevation** – The elevation in feet above mean sea level (msl) at the well’s location.
 - **Total Well Depth** – The depth that a well is installed to. This is often deeper than the bottom of the screened interval.
 - **Screened interval** – The portion of a well casing that is screened to allow water from the surrounding soil into the well pipe. There can be several screened intervals within the same well. Screened interval is usually reported in feet below ground surface elevation for both the upper most limit and lower most limit of the screen.
 - **Top Perforation** – The distance to the top of the perforation from the ground surface elevation.
 - **Bottom Perforation** – The distance to the bottom of the perforation from the ground surface elevation.
 - **Water Surface Elevation** – The elevation above mean sea level (msl) that water is encountered inside the well
 - **Depth to Water** – The distance from the ground surface or the well’ to where water is encountered inside the well
- **Historical high groundwater elevations** – This is the highest measurement of static groundwater elevation (closest to the ground surface) in a monitoring well that was recorded. Measurements of groundwater elevation are used to indicate the elevation of groundwater levels in the area near the monitored well.
- **Historical low groundwater elevations** – This is the lowest measurement of static groundwater elevation (furthest from the ground surface) in a monitoring well that was recorded. Measurements of groundwater elevation are used to indicate the elevation of groundwater levels in the area near the monitored well.
- **Depth to Groundwater** – This is the distance from the ground surface to groundwater, typically reported at a well.
- **Hydrograph** – A hydrograph is a graph that shows the changes in groundwater elevation over time for each monitoring well. Hydrographs show how groundwater elevations change over the years and indicate whether groundwater is rising or descending over time.



Figure 4-1: Well Completion Diagram

- **Constituent** – Refers to a water quality parameter measured to assess groundwater quality.
- **Subsidence** (refer to appendix Z which was included with Groundwater Conditions) – Refers to the sinking or downward settling of the earth’s surface, not restricted in rate, magnitude, or area involved, and is often the result of over-extraction of subsurface water.
- **Best Management Practice** – Refers to a practice, or combination of practices, that are designed to achieve sustainable groundwater management and have been determined to be technologically and economically effective, practicable, and based on best available science (California (CA) Code of Regulations, Title 23, Article 2).
- **Data Gap** – Refers to a lack of information that significantly affects the understanding of the basin setting or evaluation of the efficacy of Plan implementation and could limit the ability to assess whether a basin is being sustainably managed (CA Code of Regulations, Title 23, Article 2).
- **Representative Monitoring** – Refers to a monitoring site within a broader network of sites that typifies one or more conditions within the basin or an area of the basin (CA Code of Regulations, Title 23, Article 2).

4.2 Monitoring Network Objectives

This section describes the Cuyama Valley Groundwater Basin (Basin) Monitoring Networks for the five sustainability indicators that apply to the Basin. The objective of these monitoring networks is to detect undesirable results in the basin as described in Section 3 of this Groundwater Sustainability Plan (GSP) using the sustainability thresholds described in Section 5 of this GSP. Other, related objectives of the monitoring network were defined by the GSP regulations promulgated by the Department of Water Resources (DWR):

- Demonstrate progress toward achieving measurable objectives described in the Plan
- Monitor impacts to the beneficial uses or users of groundwater
- Monitor changes in groundwater conditions relative to measurable objectives and minimum thresholds
- Quantify annual changes in water budget components

The monitoring network plan provided to the Basin is intended to monitor:

- Chronic lowering of groundwater levels

- Reduction in groundwater storage
- Degraded water quality
- Land subsidence
- Depletions of interconnected surface water

The monitoring networks described in this section were designed by evaluating data provided by DWR, USGS, participating counties, and private landowners. Wells currently used for such activity are included and considered based on criteria further described below.

4.2.1 Basin Conditions Relevant to Measurement Density and Frequency

This section summarizes key basin conditions that influence the development of monitoring networks. The key conditions include hydrogeologic considerations, land use considerations, and historical groundwater conditions considerations.

The Basin, as described in the Section 2.1, is composed of one principal aquifer comprised of three geologic groups: Younger Alluvium, Older Alluvium, and Morales Formation. The majority of groundwater in the aquifer is stored in the younger and older alluvium. While there are many faults in the Basin, there are no major stratigraphic aquitards or barriers to vertical groundwater movement amongst the alluvium and Morales Formation. The aquifer has a wide range of thicknesses that vary spatially, with median reported hydraulic conductivity ranges from 1.22 – 72.1 ft/day (see Table 2.1-1 for detailed values). Figure 2.1-2 shows the extent of these formations throughout the basin.

The largest groundwater use within the Basin is for agriculture and irrigation. Figures 1-6 through 1-13 show the extent of land used for irrigated agriculture within the Basin. Based on the most recent data from 2016, there is approximately 53 square miles of agricultural land in the Basin out of a total of approximately 378 square miles, or roughly 14%.

Data provided in Section 2.2 shows the historical declining trend of groundwater levels within the central portion of the basin. Groundwater elevations in this portion of the basin have decreased by more than 400 feet from the 1940s to the present, as shown in Figure 4-2.

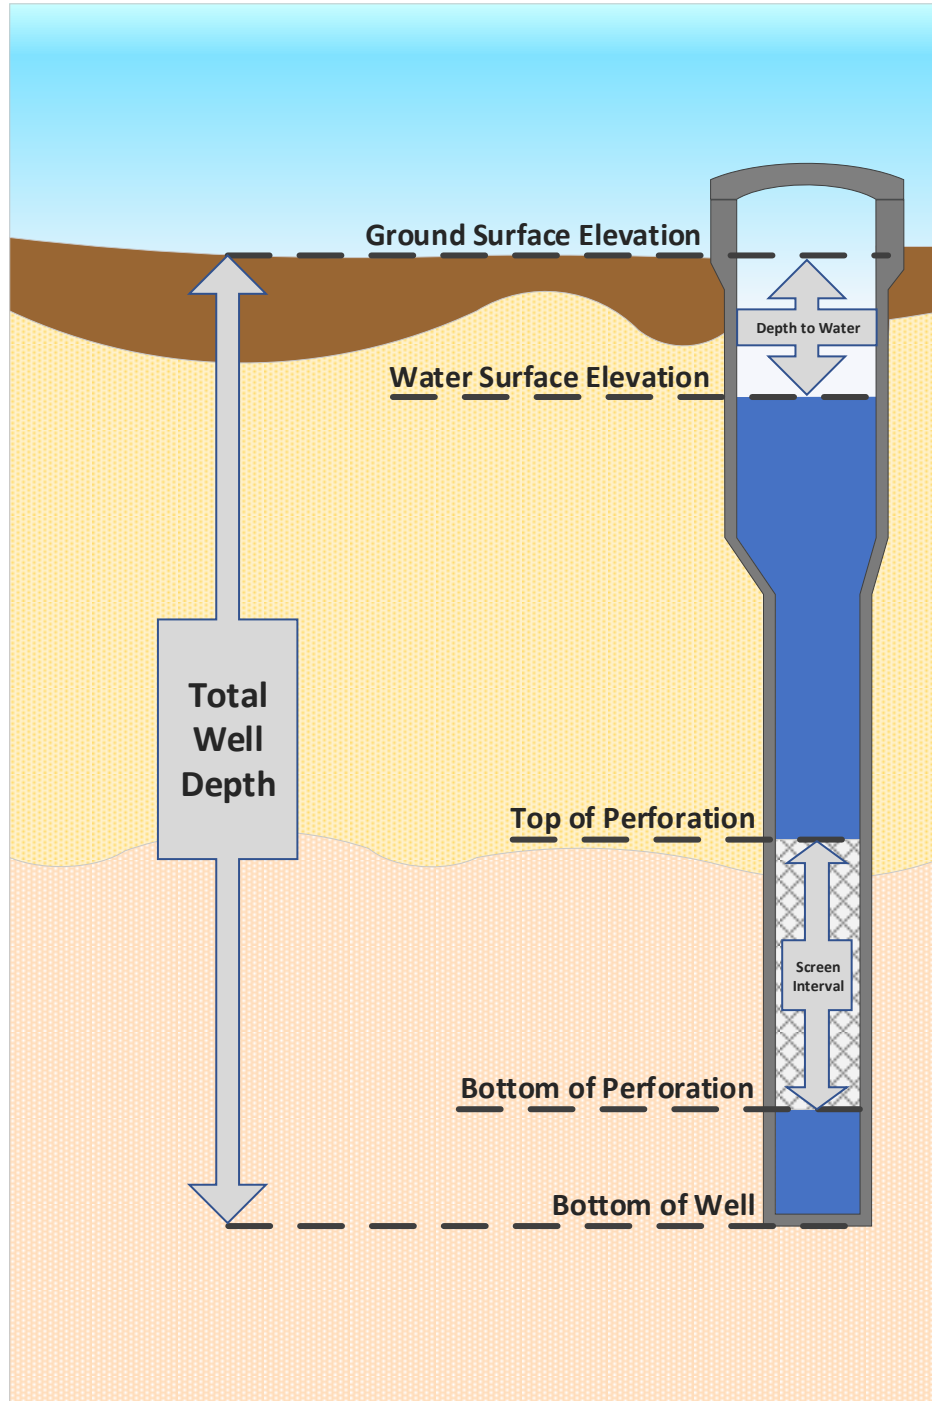


Figure 4-2: Central Basin with Combined Hydrograph

4.3 Existing Monitoring Used

This section discusses current groundwater level monitoring with the Basin.

4.3.1 Groundwater Level Monitoring

This section describes the groundwater level monitoring that has been conducted by agencies and private land owners in the Basin.

Department of Water Resources, Statewide Dataset / CASGEM

The State of California has several water-related database portals accessible online. These include, but are not limited to, the California Statewide Groundwater Elevation Monitoring (CASGEM) Program, Water Data Library (WDL), and the Groundwater Information Center Interactive Map Application (GICIMA). The data for these portals is organized and saved in one master database, where each portal accesses and displays the intended data dependent on the search criteria and portal being used.

In an attempt to include all available data related to the Basin, DWR was contacted directly and they provided a link for Groundwater Sustainability Agency (GSA) representatives to download the entire State's database. Cuyama Basin data was then extracted from this dataset.

Although the master dataset was used to collect the initial data, the CASGEM portal was utilized throughout the planning process to verify data (DWR CASGEM Online System, 2018). CASGEM is tasked with tracking seasonal and long-term groundwater elevation trends in groundwater basins throughout the state. CASGEM was initialized by Senate Bill x7-6 passed by the legislature in 2009 to establish collaboration between local monitoring parties and DWR to collect groundwater elevations (DWR Groundwater Monitoring [CASGEM] 2018).

CASGEM allows local agencies to be designated as CASGEM monitoring entities for groundwater basins throughout the state (CASGEM Brochure 2018). CASGEM monitoring entities can measure groundwater elevation or compile data from other agencies to fulfill a monitoring plan and each is responsible for submitting that data to DWR. Three monitoring entities operate as CASGEM monitoring entities in the Cuyama Basin; the Santa Barbara County Water Agency (SBCWA), Ventura County Watershed Protection District (VCWPD), and San Luis Obispo Flood Control & Water Conservation District (SLOFC&WCD).

CASGEM includes two kinds of wells in its database:

- CASGEM Wells – All of these wells include well construction information
- Voluntary Wells – Wells included in the CASGEM database on a volunteer basis where the well construction may not be identified or made public

There are currently six CASGEM wells and 107 voluntary wells in the Basin. Figure 4-3 shows the locations of these wells.

Most wells were measured on either a semi-annual or annual schedule. Summary data about the wells reported through CASGEM can be seen in Table 4-1.

Number of CASGEM wells	6
Number of voluntary wells	107
Total number of DWR and CASGEM wells	222
Earliest measurement year	1946
Longest period of record	68 years
Median period of record	12 years
Median number of records for a single well	19

Table 4-1: Cuyama Basin Monitoring Well Information Provided by CASGEM

Spatial distribution of the wells is best suited to capture groundwater trends in the central portion of the Basin, and around the Ventucopa area. There are also several monitoring wells in the south eastern portion of the Basin upstream of Ventucopa. CASGEM data is sparser along the north facing slopes of the main Cuyama Valley and the western portion of the Basin, as can be seen in Figure 4-3.

Figure Exported: 1/25/2019, By: ceagleton, Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\ PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4-3 DWRCASGEM_Wells.mxd


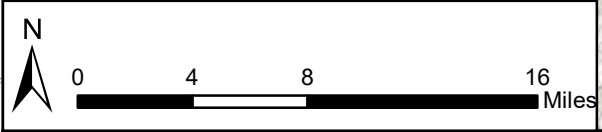


Figure 4-3: Cuyama GW Basin Wells with Monitoring Data Provided by DWR

Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 January 2019

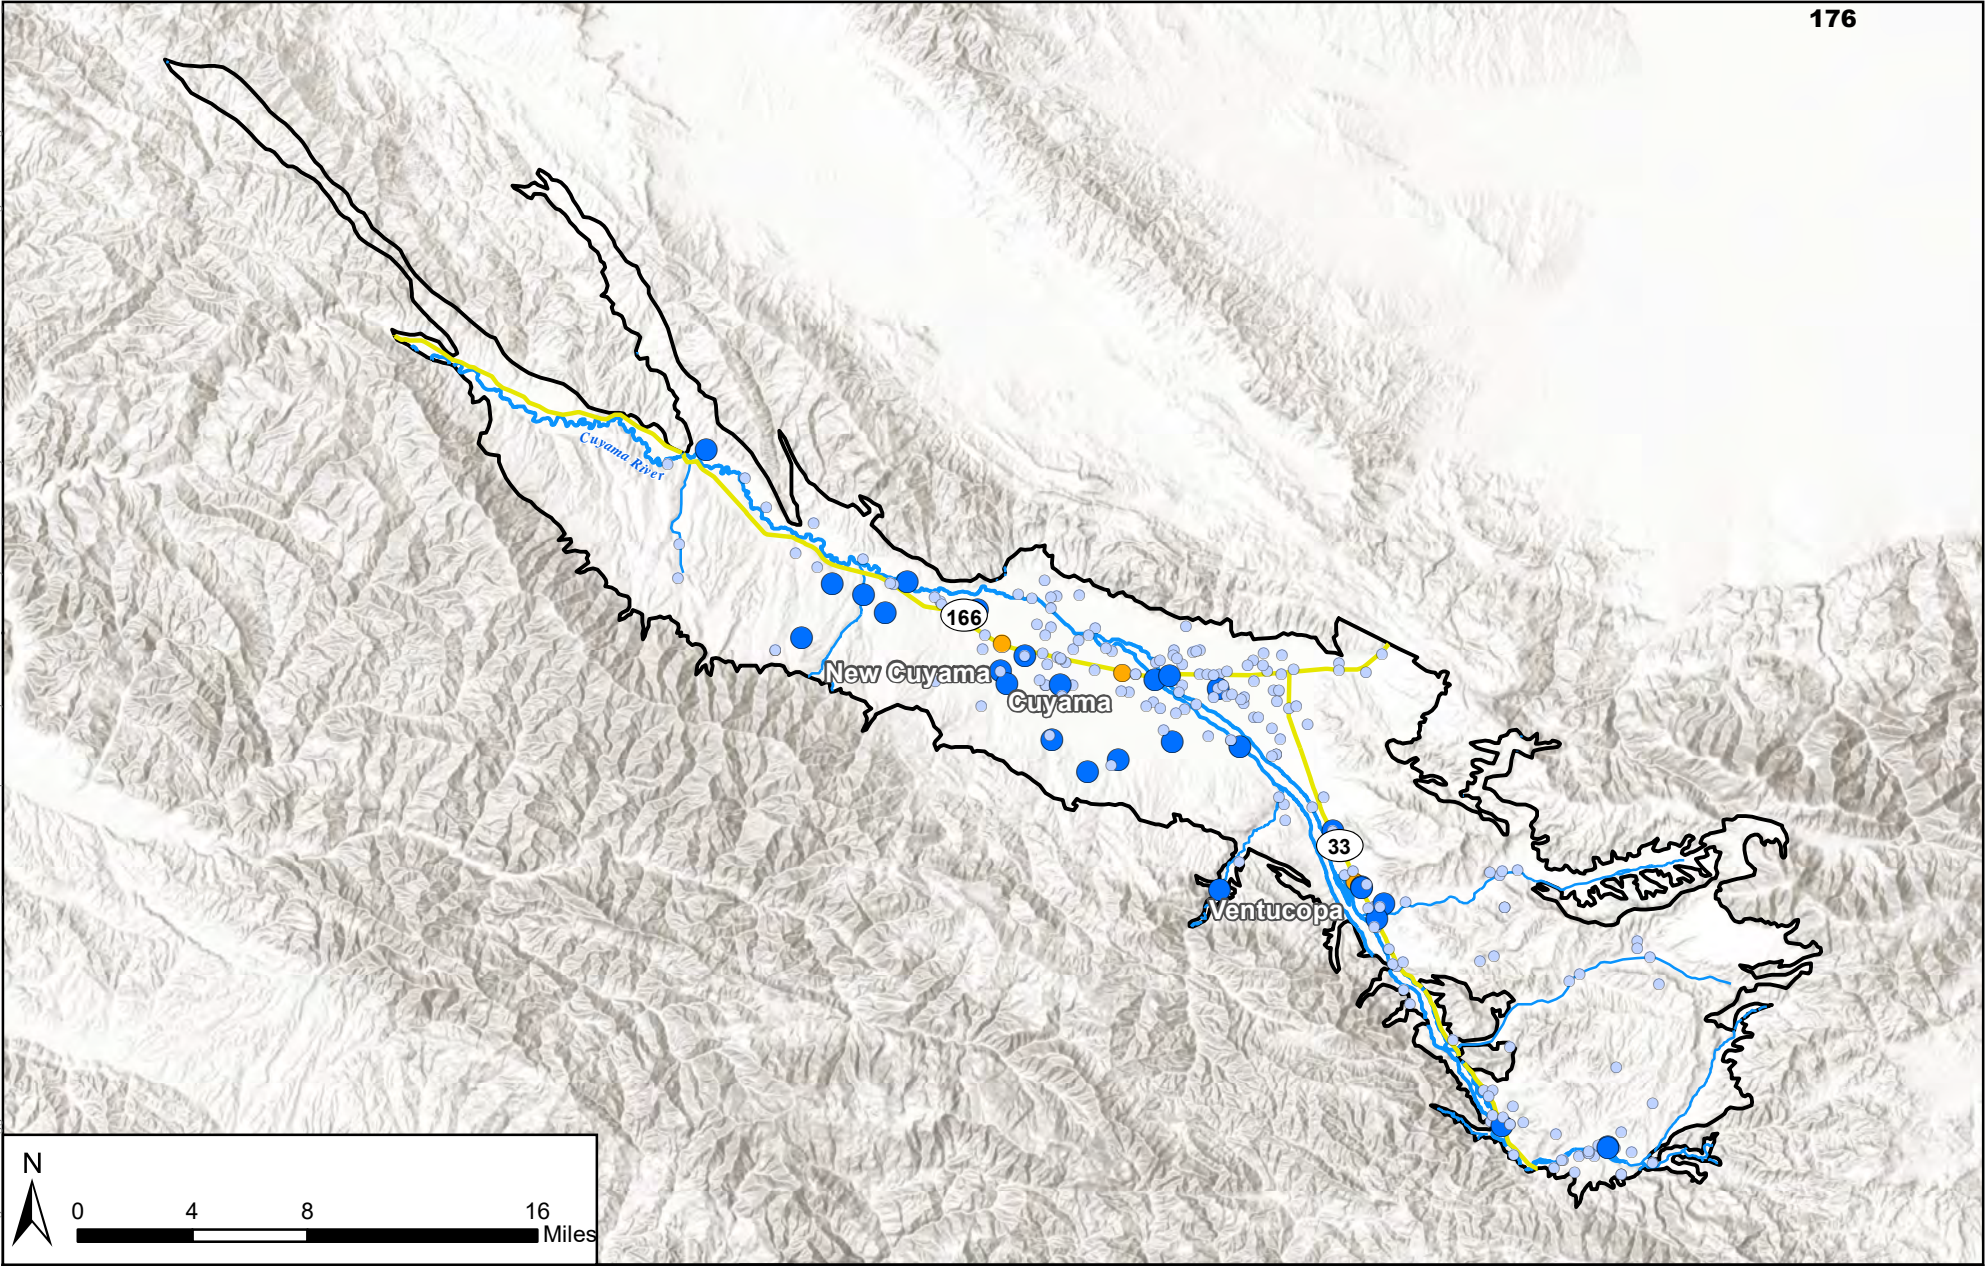

Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- DWR Database Wells Last Measured in 2017-2018
- DWR Database Wells Last Measured 2016 and Earlier

United States Geological Survey

The United States Geological Survey (USGS) has the most groundwater elevation monitoring locations within the Basin. Many of these wells were installed for a 1966 groundwater study and have since been retired.

It should be noted that there are significant overlaps between the DWR provided datasets and the USGS provided datasets. Approximately 106 wells appeared in both downloaded datasets. Discussion about overlapping data is provided in Section 4.3.2 below.

USGS data may be accessed through their online portals for the National Ground-Water Monitoring Network (NGWMN), Groundwater Watch, and National Water Information System (NWIS).

The USGS online data portals provide “Approved” data which has been quality-assured and fit to be published, and “Provisional” data which is unverified and subject to revision. The USGS was contacted directly and coordinated download of their monitoring records in the Basin, and to obtain all available data, the USGS URL Generation tool was used to download all provisional and approved data within the Basin.

USGS has approximately 476 wells within the basin. Summary statistics of this data may be found in Table 4-2 below.

Total number of USGS wells	476
Earliest measurement date	1946
Longest period of record	68 years
Median period of record	2 years
Median number of records for a single well	2 years

Table 4-2: Cuyama Basin Monitoring Well Information Provided by USGS

A significant portion of the wells included in the USGS dataset are located near the Cuyama River and in the central portion of the Basin. Wells are also found along many of the tributaries that feed the Cuyama River during large precipitation events. Well locations included in the USGS dataset are shown in Figure 4-4.

Figure Exported: 1/25/2019 10:25:19 AM By: ceagleton Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4.4 USGS Wells.mxd


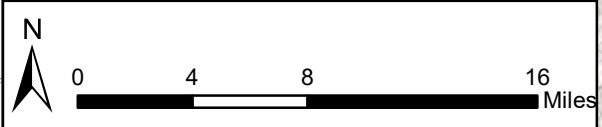


Figure 4-4: Cuyama GW Basin Wells with Monitoring Data Provided by USGS

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018

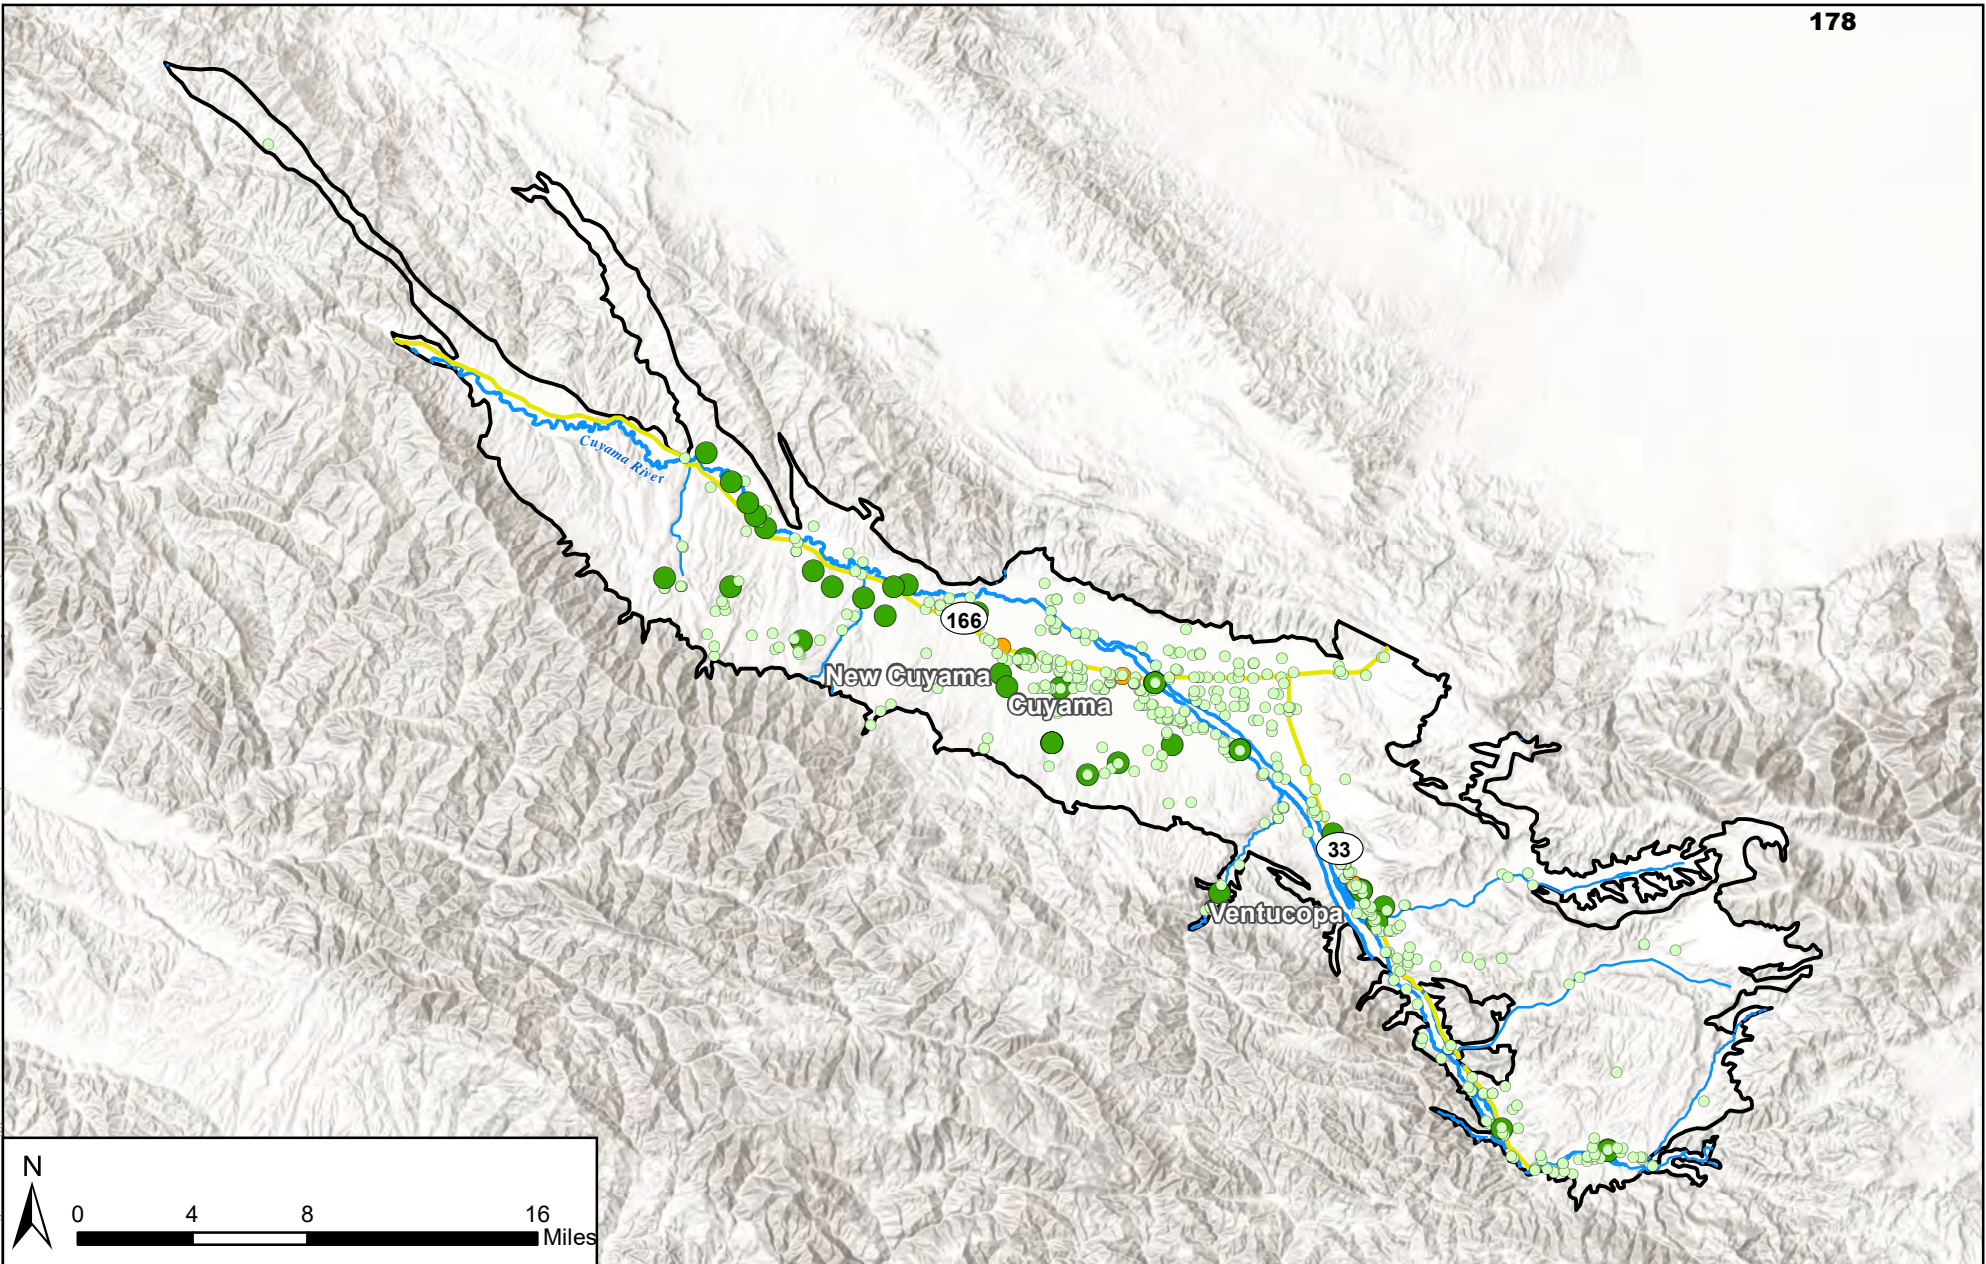

Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- USGS Database Wells Last Measured in 2017-2018
- USGS Database Wells Last Measured 2016 or Earlier

Santa Barbara County Water Agency

The Santa Barbara County Water Agency (SBCWA) maintains data for 36 wells within the Cuyama Basin. Some of those wells are owned by private land owners, while others owned by local agencies such as Caltrans and the California Department of Fish and Wildlife. Summary statistics for these wells are included in Table 4-3 below.

Number of SBCWA-monitored wells	36
Earliest measurement date year	1950
Longest period of record	68 years
Median period of record	2 years
Median number of records for a single well	8
Number of SBCWA wells included in the Monitoring Network	20

Table 4-3: Cuyama Basin Monitoring Well Information Provided by SBCWA

Wells included in the SBCWA dataset are located within Santa Barbara County near the Cuyama River and in the hills to the south of the river. Figure 4-5 shows the locations of these wells.

Figure Exported: 1/25/2019, By: ceagleton, Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\ PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4-5_SBCWA_Wells.mxd



Figure 4-5: Cuyama GW Basin Wells with Monitoring Data Provided by SBCWA

Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 January 2019



Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- Santa Barbara County Database Wells Last Measured in 2017-2018
- Santa Barbara County Database Wells Last Measured 2016 or Earlier

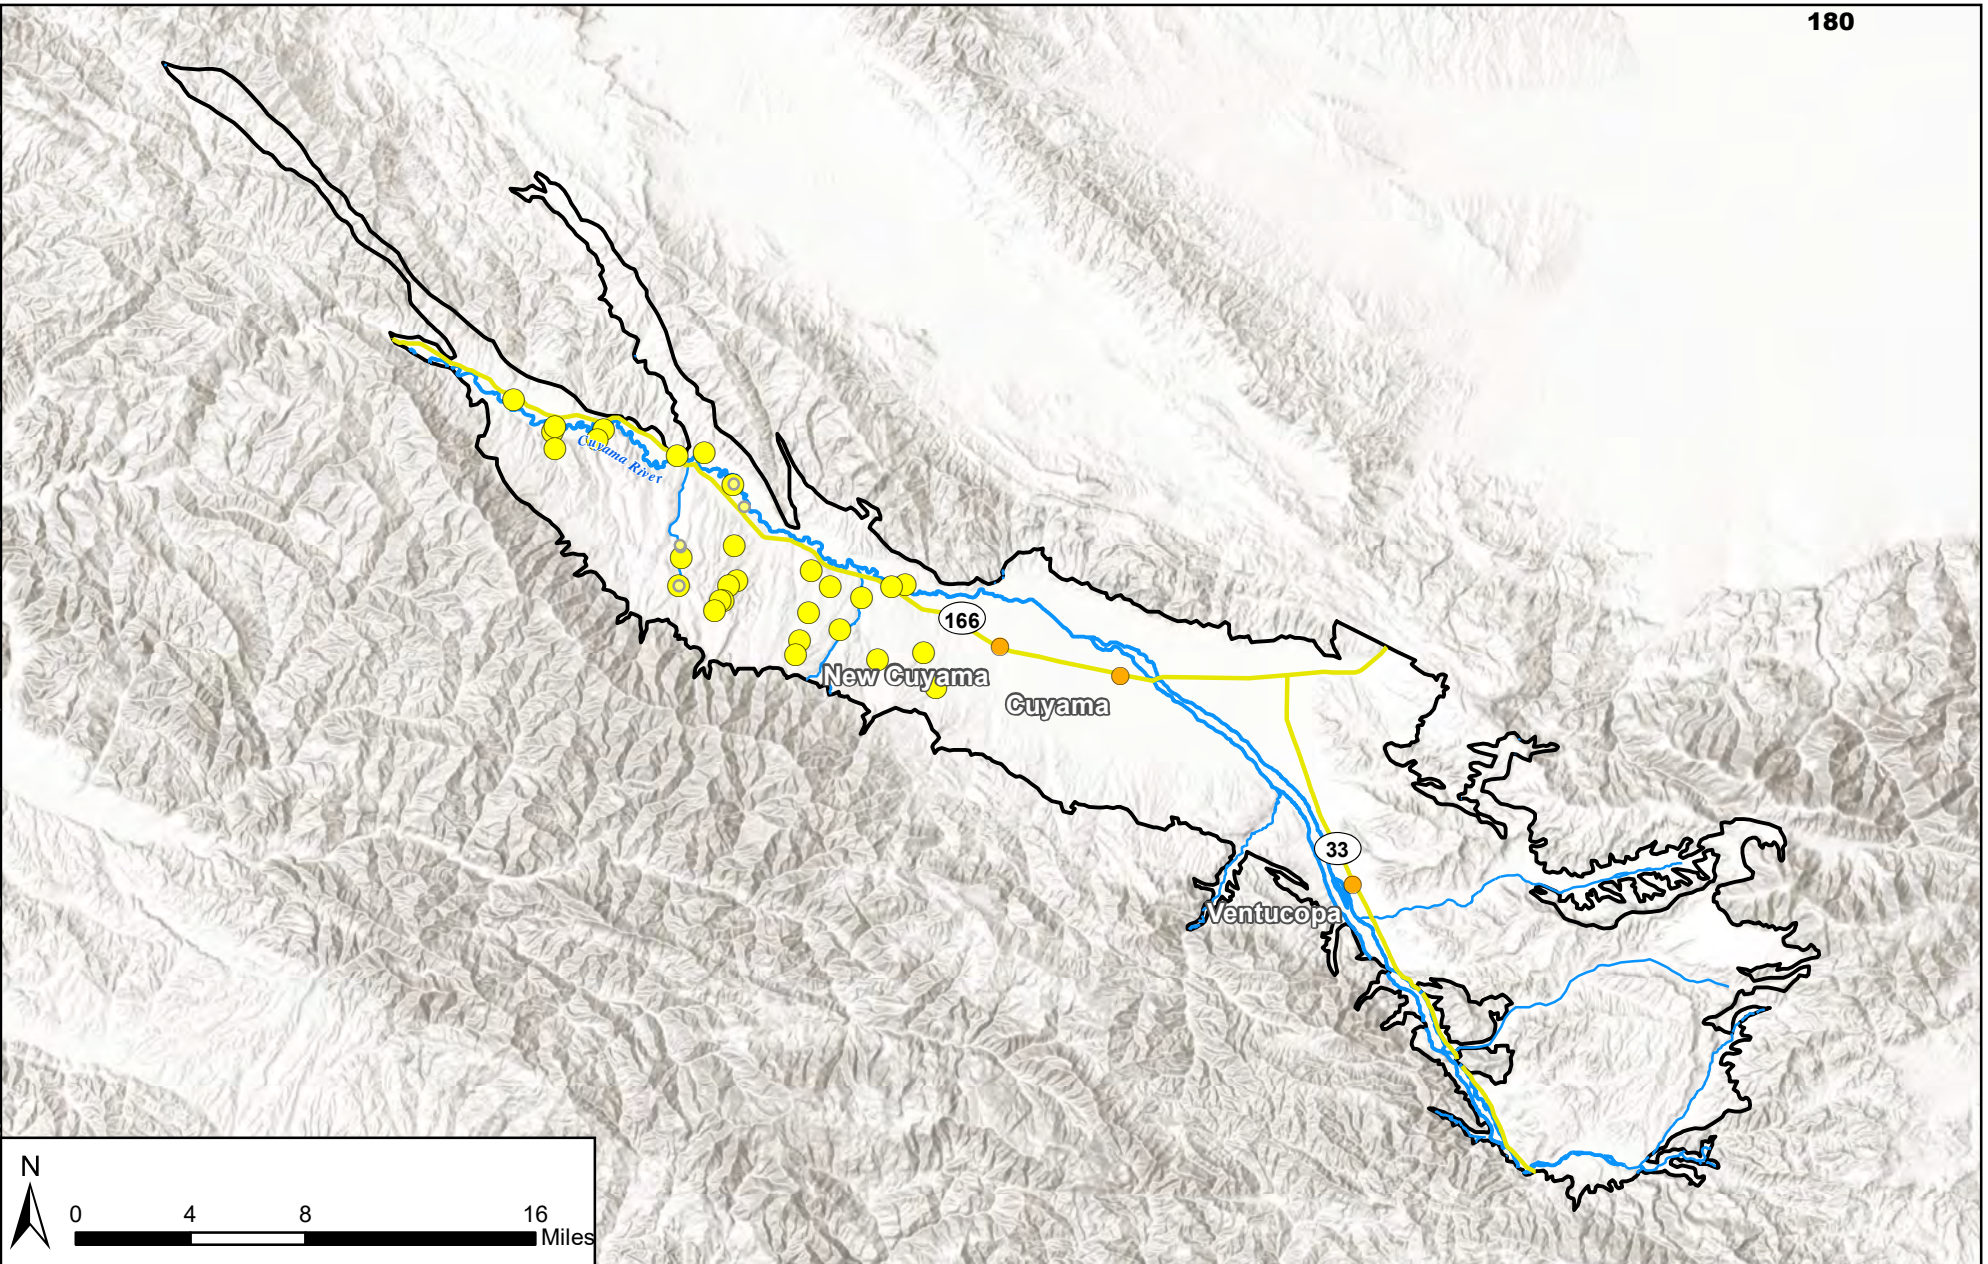

San Luis Obispo County Flood Control & Water Conservation District

San Luis Obispo County Flood Control & Water Conservation District (SLOCFC&WCD) maintains data for two wells within the Basin. SLOCFC&WCD also reports the data for the two wells to DWR, thus all data is for the wells is incorporated through the DWR dataset.

The wells are located in the central portion of the Basin, north of the Cuyama River and west of Highway 33. Both wells meet the minimum requirements to be included in the monitoring network, and summary statistics are provided in Table 4-4 below.

Number of SLOCFC&WCD-monitored wells	2
Earliest measurement date year	1990
Longest period of record	28 years
Median period of record	18 years
Median number of records for a single well	35

Table 4-4: Cuyama Basin Monitoring Well Information Provided by SLOCFC&WCD

Locations for the two wells included in the SLOCFC&WCD dataset are shown in Figure 4-6.

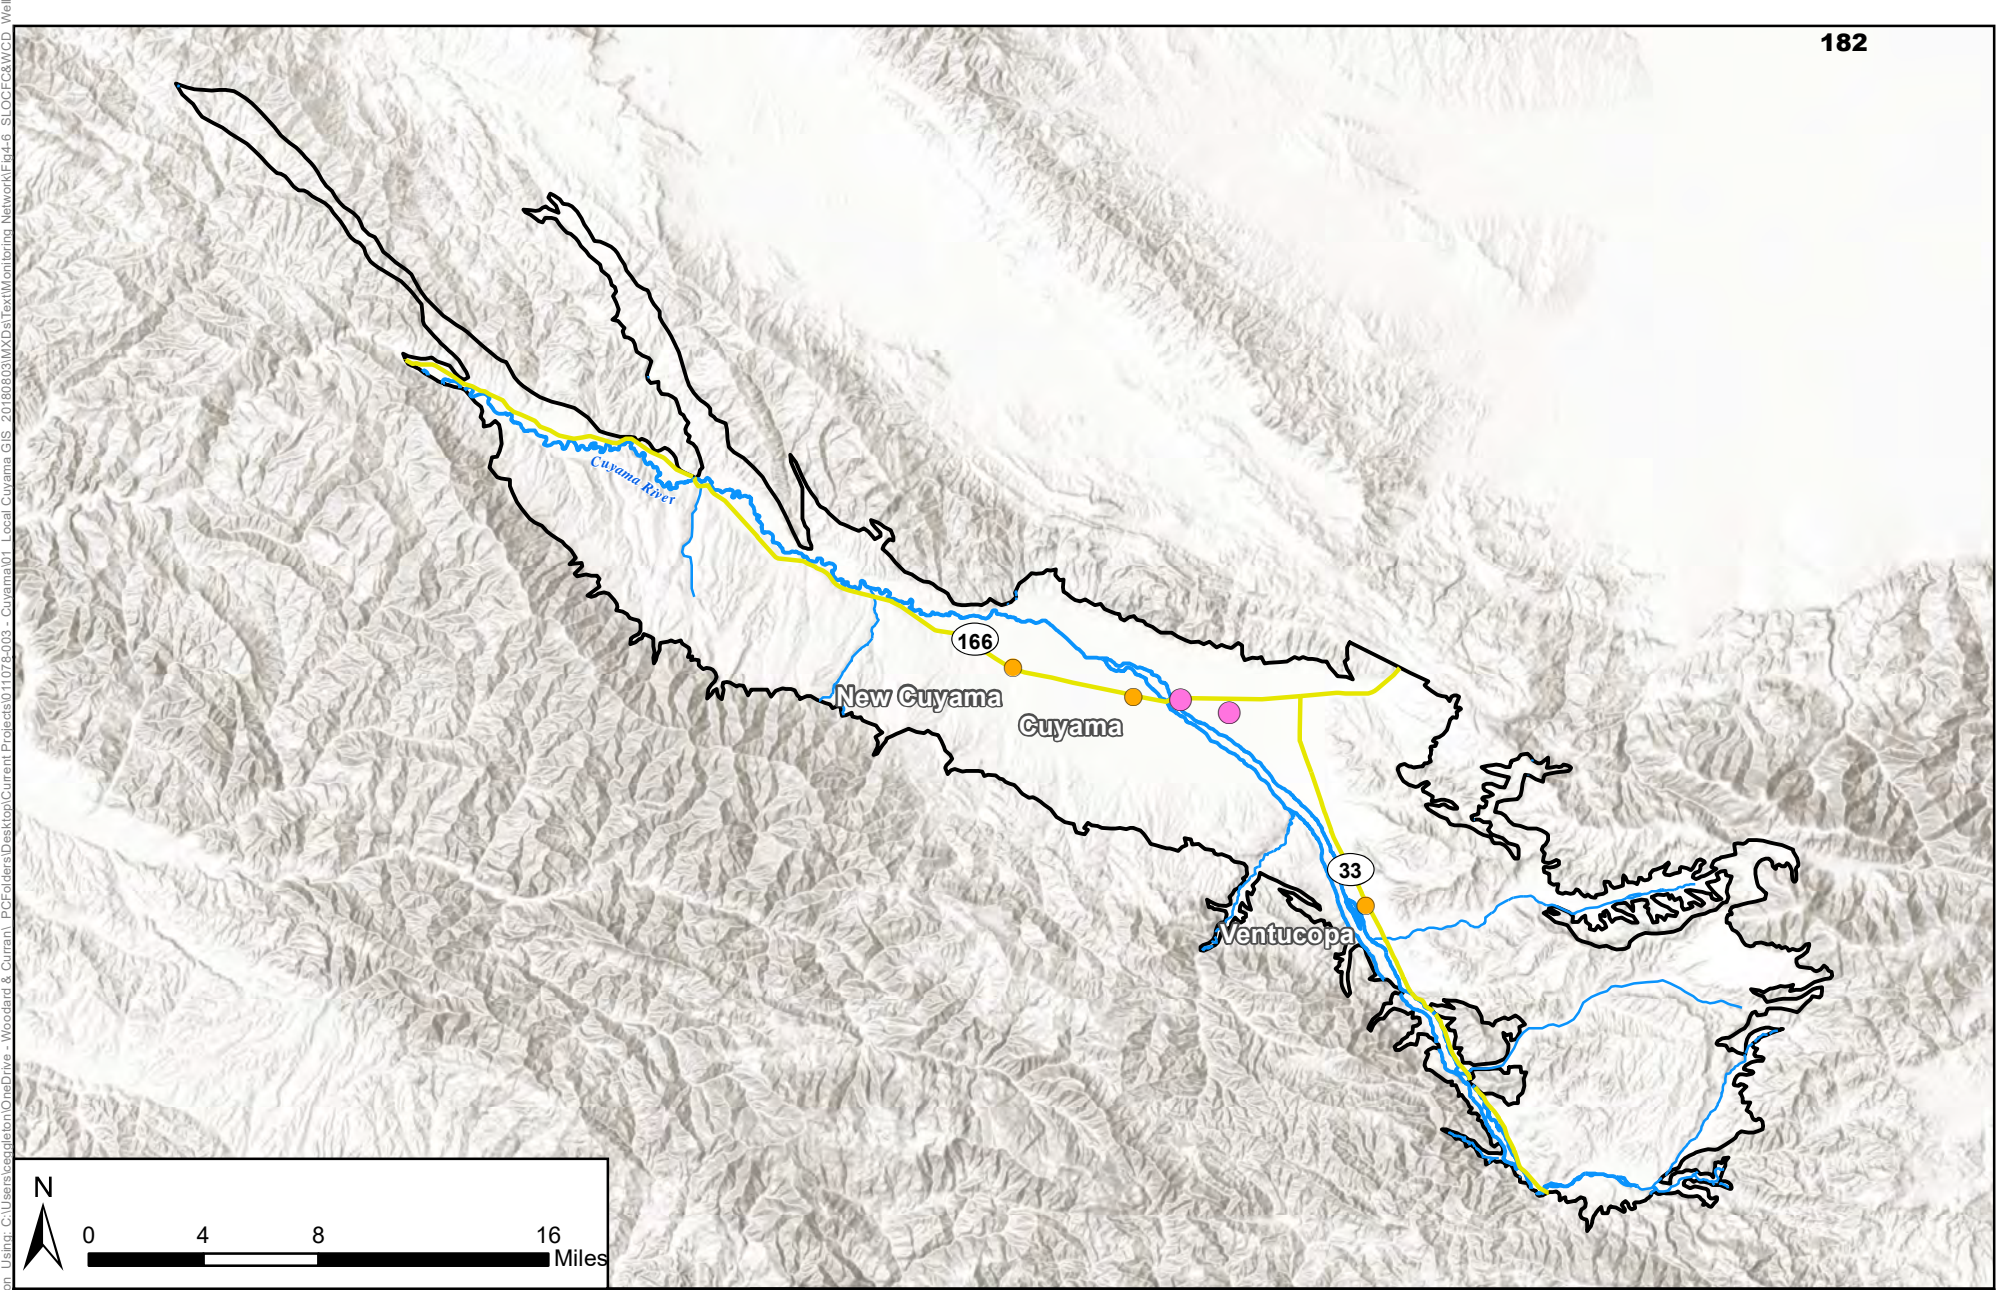


Figure 4-6: Cuyama GW Basin Wells with Monitoring Data Provided by SLOCFC&WCD

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018



Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- San Luis Obispo County Wells Last Measured in 2017-2018

Figure Exported: 1/25/2019 10:25:19 AM By: ceagleton Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4-6_SLOCFC&WCD_Wells.mxd

Ventura County Watershed Protection District

The Ventura County Watershed Protection District (VCWPD) manages 22 groundwater elevation monitoring wells within the Basin. Twenty of those wells are incorporated in the DWR dataset.

The majority of wells managed by VCWPD are discontinued and no longer measure groundwater elevations. Five of the 22 wells have measured elevation data within the last decade and are currently active. A summary of the wells statistics is provided in Table 4-5 below.

Number of VCWPD-monitored wells	22
Earliest measurement date year	1971
Longest period of record	46 years
Median period of record	5.8 years
Median number of records for a single well	21.5

Table 4-5: Cuyama Basin Monitoring Well Information Provided by VCWPD

The wells included in the VCWPD dataset are located in the south eastern portion of the Basin that intersects with Ventura County. The wells are primarily found near the Cuyama River close to agricultural lands. Locations for the wells are provided in Figure 4-7.

Figure Exported: 1/25/2019, By: ceagleton, Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\ PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4-7_VCWPD_Wells.mxd


Figure 4-7: Cuyama GW Basin Wells with Monitoring Data Provided by VCWPD

Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 January 2019



Legend

- Cuyama Basin
- Ventura County Watershed Protection District
- Towns
- Highways
- Cuyama River
- Streams

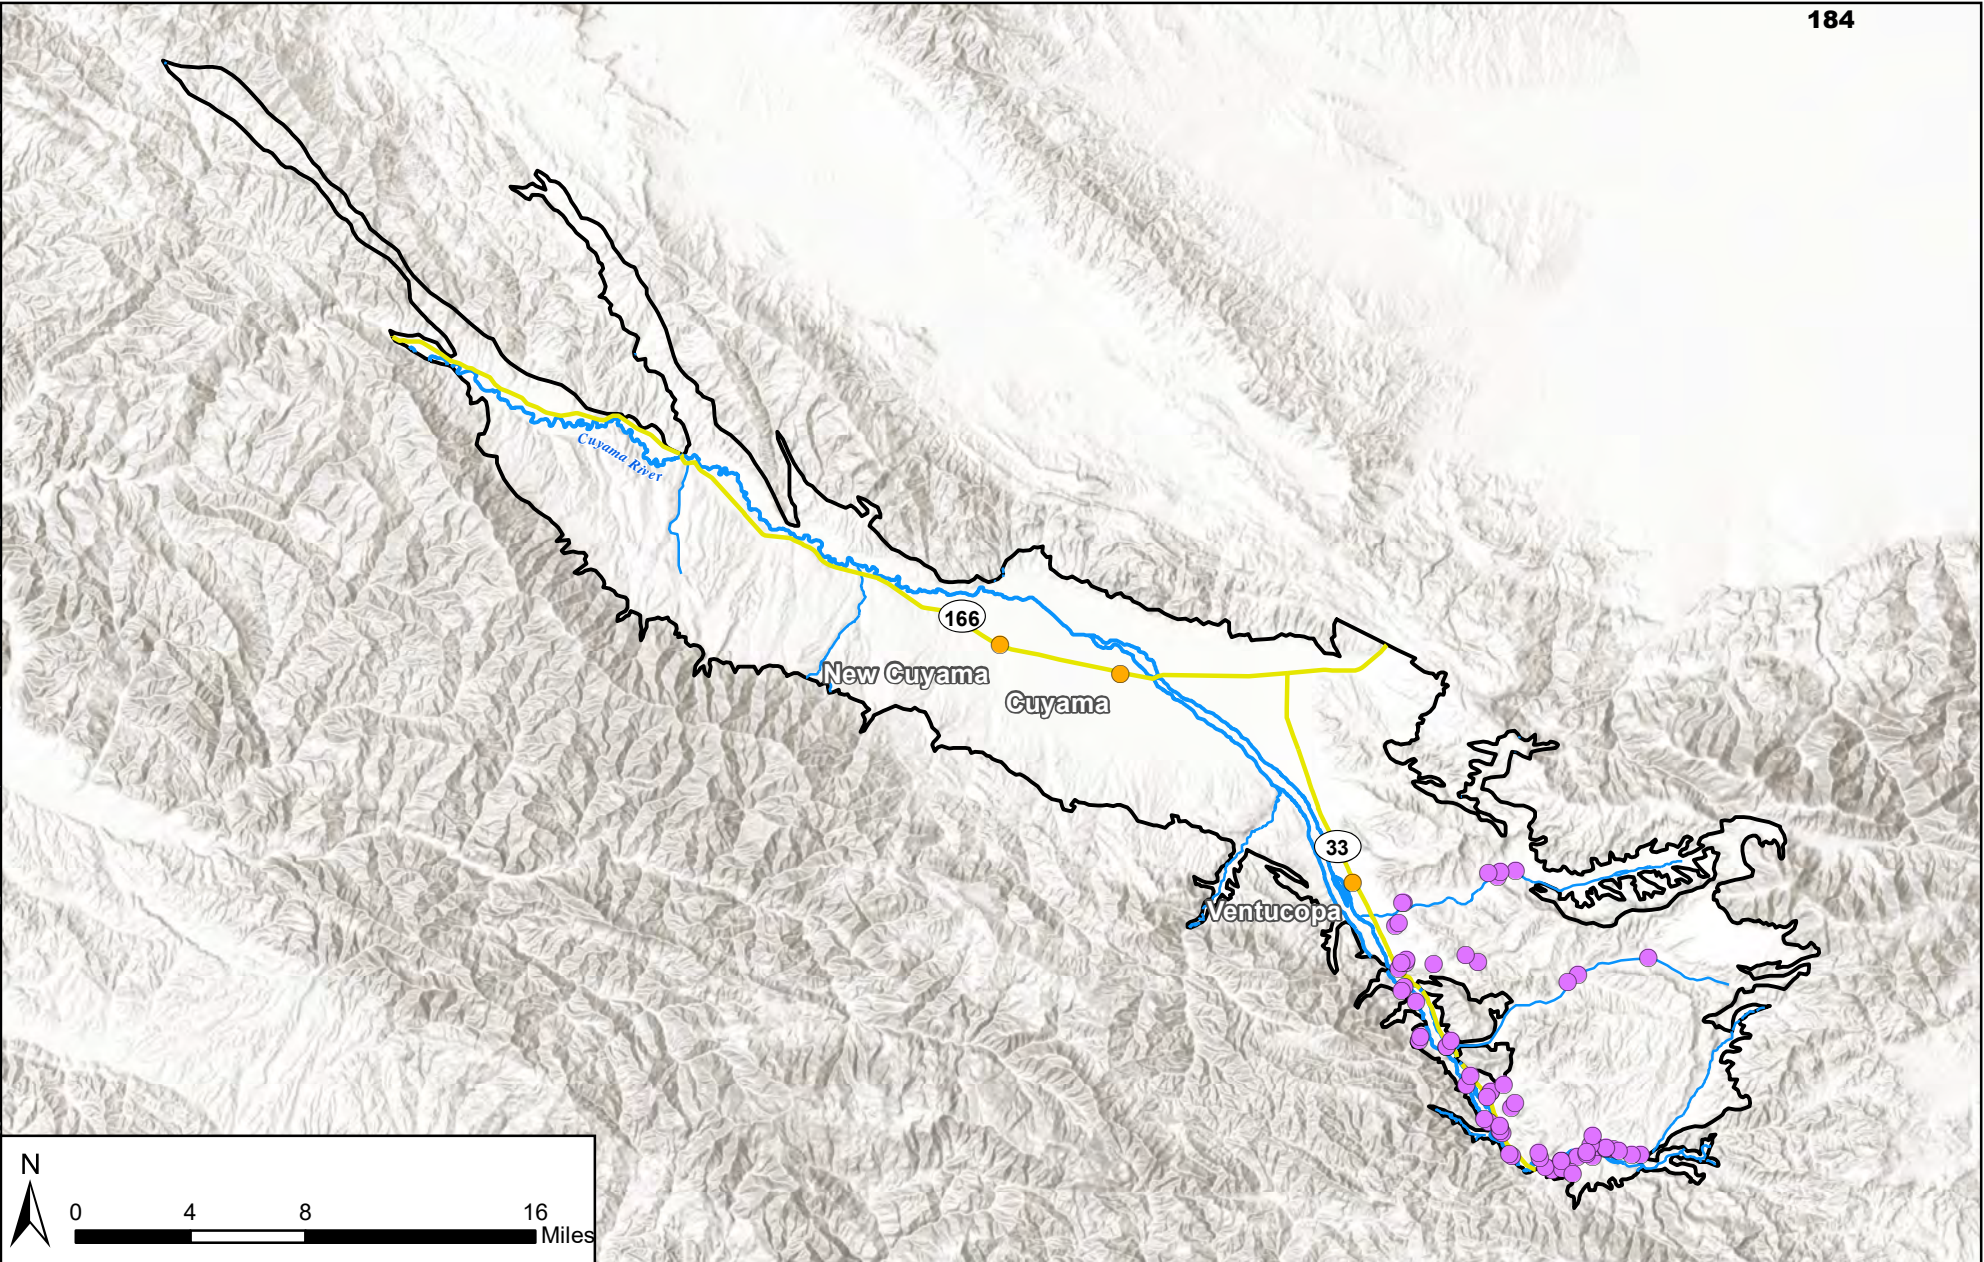

Cuyama Community Services District

The Cuyama Community Services District (CCSD) performs monitoring on its two production wells, one of which has been retired. The CCSD wells are located just south of the CCSD. Data for these wells is included in the SBCWA dataset, as well as the DWR and USGS datasets. Summary statistic for the wells is included in Table 4-6. Locations for these wells can be found in Figure 4-8.

Number of CCSD-monitoring wells	2
Earliest measurement date year	1981
Longest period of record	37 years
Median period of record	26.5 years
Median number of records for a single well	79

Table 4-6: Cuyama Basin Monitoring Well Provided Information by CCSD

Figure Exported: 1/25/2019, By: ceagleton, Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 Local Cuyama GIS 2018\0803\MXD\Text\Monitoring Network\Fig4-8 CCSD Wells.mxd

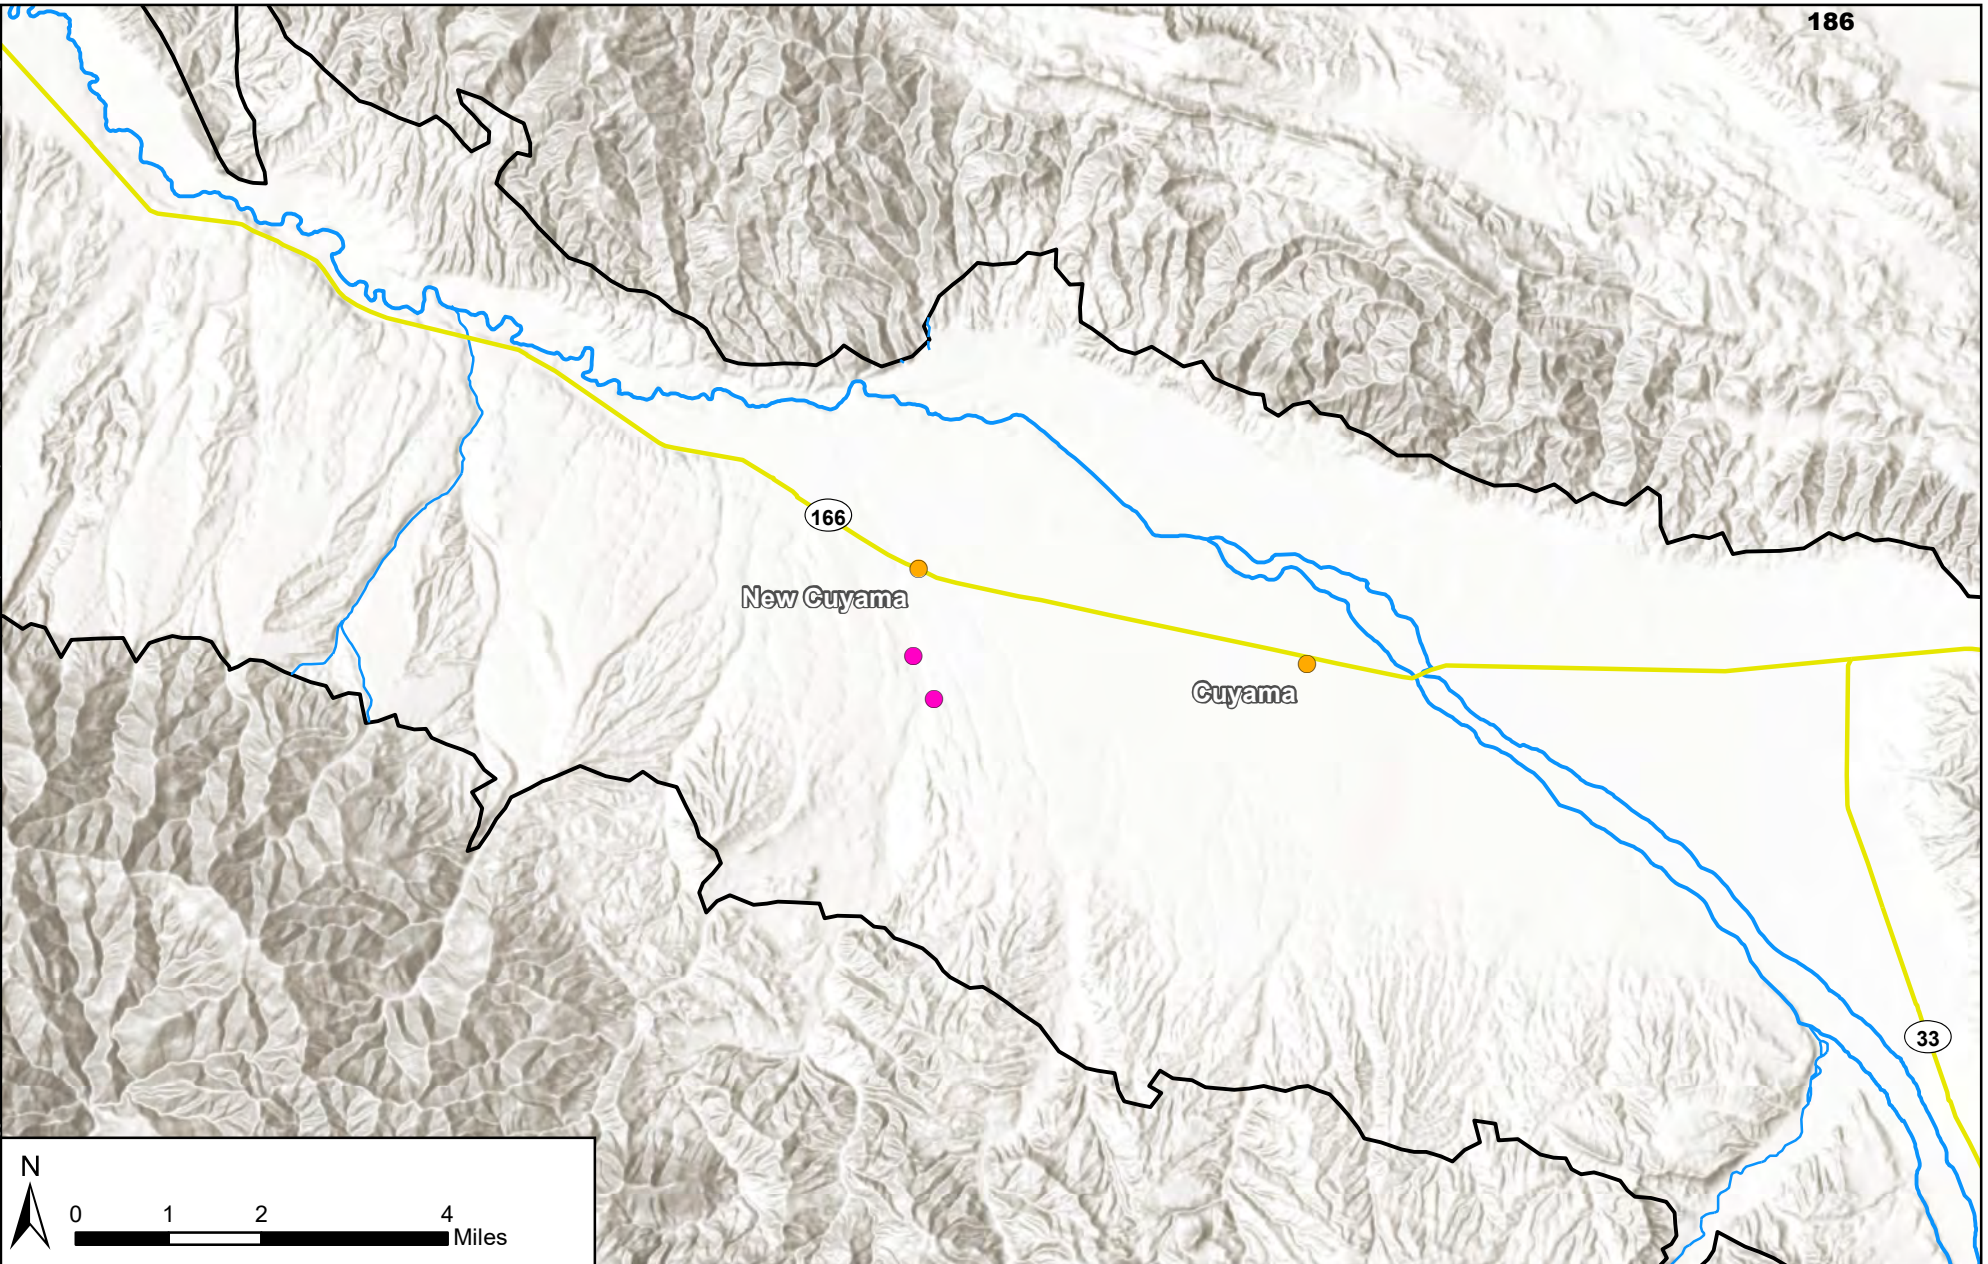


Figure 4-8: Cuyama GW Basin Wells with Data Provided by CCSD

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

January 2019



Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- CCSD Wells

Private Landowners

Private landowners within the Basin own and operate large numbers of wells, primarily for irrigation and domestic use. Many wells owned by private landowners are included in the databases described above. In addition, these landowners have provided additional monitoring data on 99 wells at the request of the GSA. Summary statistics for this additional data is provided in Table 4-7.

Number of Private Landowner wells with monitoring data	99
Earliest measurement date year	1975
Longest period of record	42 years
Median period of record	15 years
Median number of records for a single well	16

Table 4-7: Cuyama Basin Monitoring Well Information Provided by Private Landowners

The private landowner wells for which monitoring information was provided are distributed throughout the Basin. The majority of wells are located within the central portion of the Basin near the Cuyama River and Highway 166. There is an additional cluster towards the western portion of the basin that runs along the Cuyama River. Private landowner wells are shown in Figure 4-9.

Figure Exported: 1/25/2019 1:25:2019 By: ceagleton Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\ PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4-9 PrivateLandowner Wells

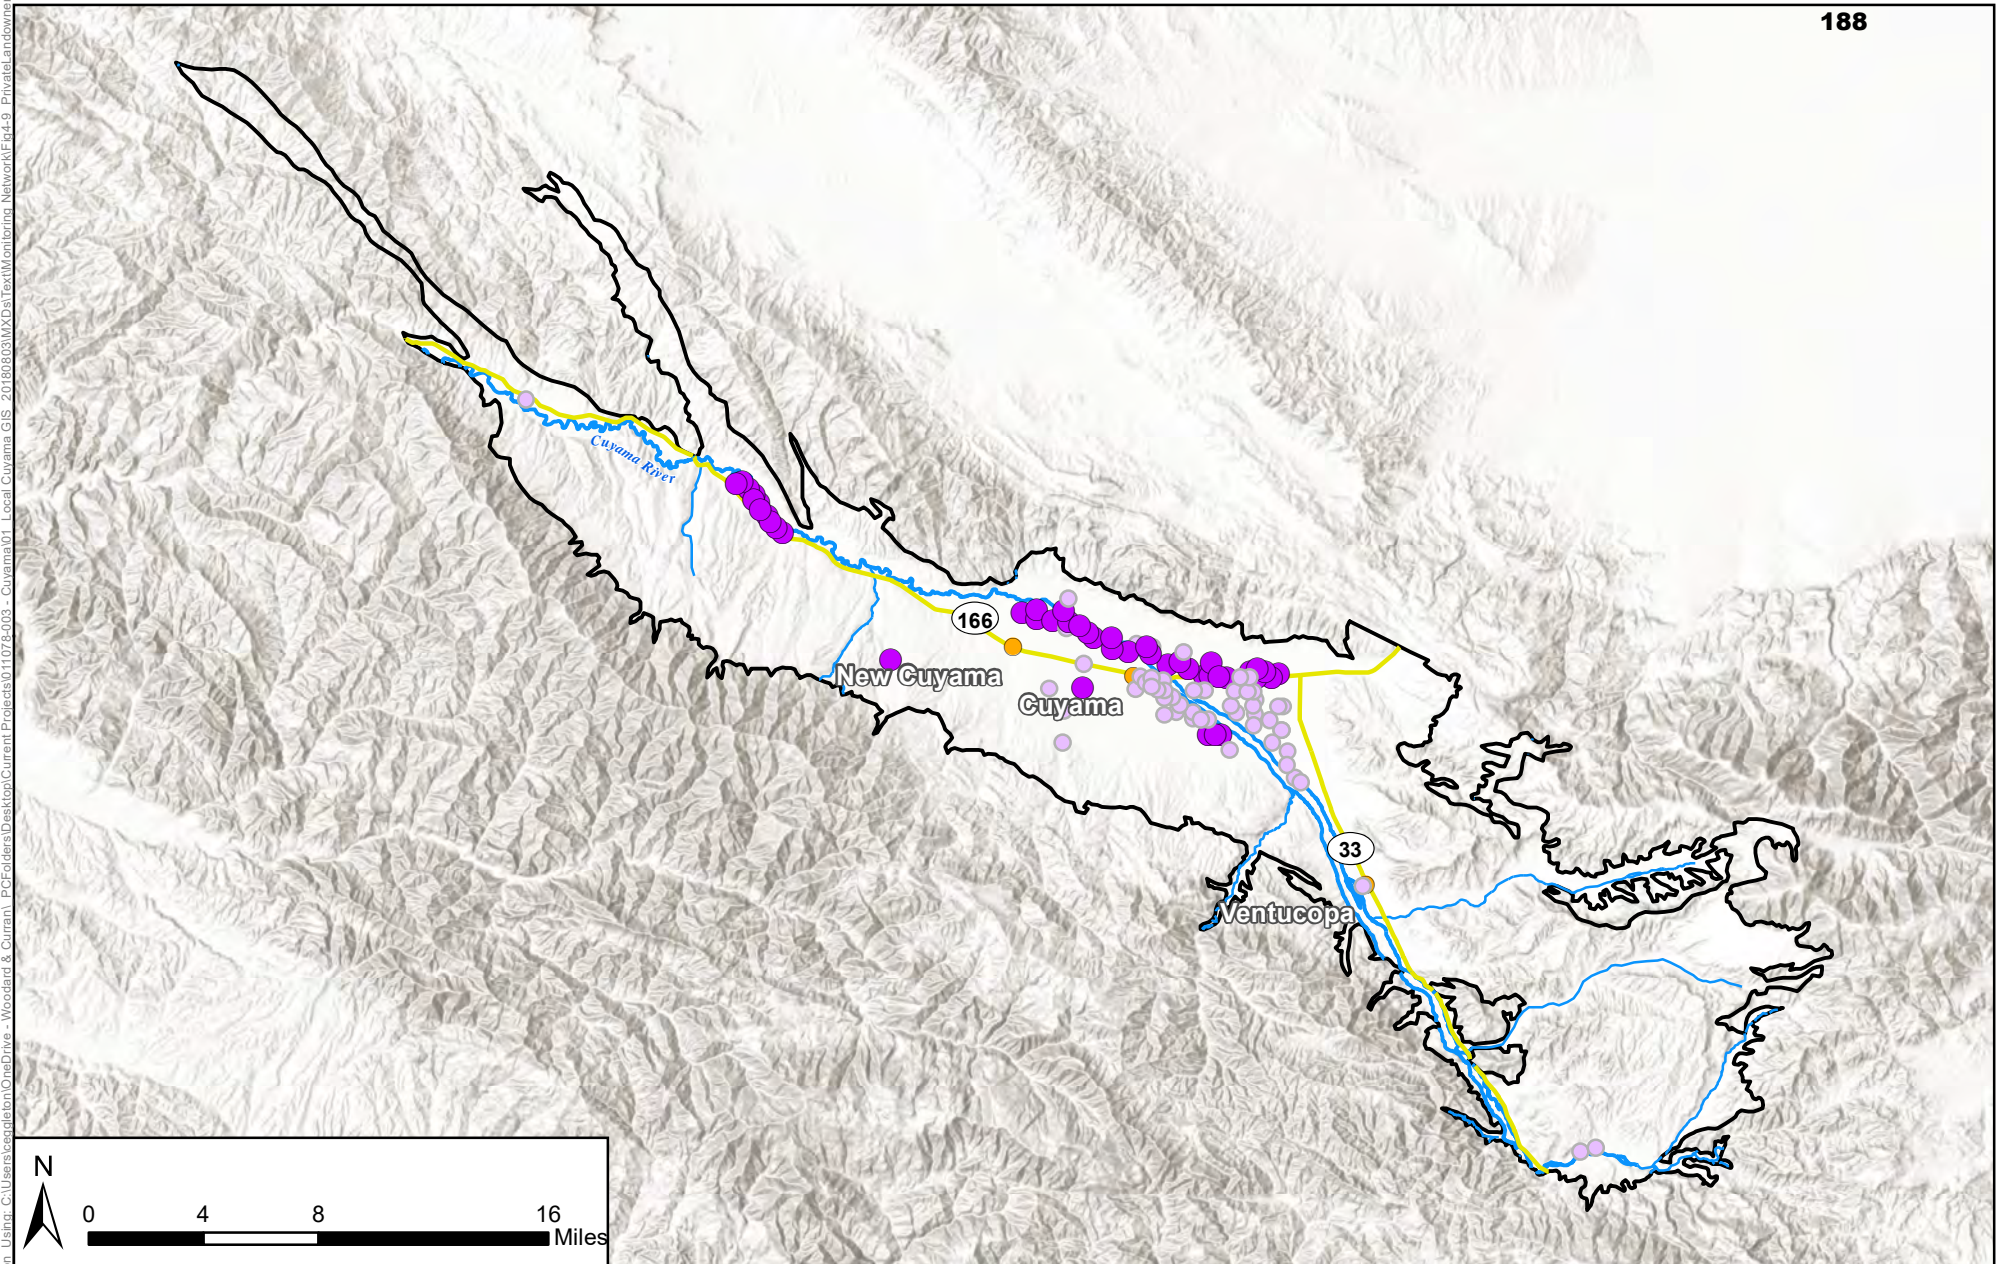


Figure 4-9: Cuyama GW Basin Wells with Monitoring Data Provided by Private Landowners

Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 January 2019



Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- Private Landowner Reported Wells Last Measured in 2017-2018
- Private Landowner Reported Wells Last Measured 2016 and Earlier

4.3.2 Overlapping and Duplicate Data

Many of the data sources used to compile and create the Cuyama Basin Database contain duplicate entries for wells, metadata, groundwater level measurements, and groundwater quality measurements. Much of the well information managed by the counties within the Basin is also provided and incorporated into the DWR dataset. Many of the USGS wells and DWR wells overlap between datasets.

To avoid duplicate entries when compiling the Cuyama Basin Database, wells were organized by their State Well Number (SWN), Master Site Code (MSC), USGS ID, Local Name, and Name. Duplicates were identified and then removed or combined as necessary. Each unique well was then assigned an OPTI ID which was used as the primary identification number for all other processes and mapping exercises.

OPTI IDs were used to identify wells in the database within the Basin because not all data sources use similar identification methods, as shown in Table 4-8 below.

Data Maintaining Entity	SWN	CASGEM ID	USGS ID	MSC	Local Name	Name
DWR	✓	✓		✓		
USGS	✓		✓		✓	
SLOCFC&WCD	✓					
SBCWA	✓		✓		✓	
VCWPD	✓					
Private Landowners					✓	✓

✓ = All wells had this information, ✓ = Some wells had the information, ✓ = Few wells had the information

Table 4-8: Well Identification Matrix

4.3.3 Groundwater Quality Monitoring (Combine Existing Programs)

This section discusses existing groundwater quality monitoring programs in the Cuyama Basin.

NWQMC / USGS / ILRP

The National Water Quality Monitoring Council (NWQMC) was created in 1997 to provide a collaborative, comparable, and cost-effective approach for monitoring and assessing the United State's water quality. Several organizations contribute to the database including the Advisory Committee on Water Information (ACWI), the Agricultural Research Service (ARS), the Environmental Protection Agency (EPA), and USGS (NWQMC, 2018).

A single online portal provides access to data from the contributing agencies. Data is included from the USGS national Water Information System (NWIS) the EPA STOrage and RETrieval (STORET) Data Warehouse, and the USDA ARS Sustaining The Earth's Watersheds – Agricultural Research Database System (STEWARDS). Data incorporates hundreds of different water quality constituents from the different contributing agencies. Initial water quality data for the Cuyama Basin was downloaded through

NWQMC and included data for USGS monitoring sites and Irrigated Land Regulatory Program (ILRP) monitoring sites. ILRP was initiated in 2003 to prevent agricultural runoff from impairing surface waters, and in 2012, groundwater regulations were added to the program. ILRP water quality measurements are sampled from surface locations (DWR ILRP, 2018). There are currently five ILRP measurement sites within the Cuyama Basin. ILRP uses the California Environmental Data Exchange Network (CEDEN) to manage the data associated with the program. CEDEN data is then incorporated with USGS data, and thus included in the NWQMC database (DWR CEDEN, 2018).

The NWQMC database provides TDS data on 180 water quality monitoring sites. This database also provided data for a wide variety of constituents not included here.

Summary statistics for the NWQMC, USGS and ILRP monitoring sites is shown in Table 4-9.

NWQMC, USGS, and ILRP Water Quality Monitoring Sites	
Number of measurement sites	180
Earliest measurement date year	1940
Longest period of record	53 years
Median period of record	<1 year
Median number of records for a single site	2

Table 4-9: Cuyama Basin NWQMC, USGS, ILRP Water Quality Monitoring Sites Summary Statistics

The majority of the water quality monitoring sites included in the NWQMC database are located in the central portion of the basin and along the Cuyama River as it follows Highway 33. These monitoring sites can be seen in Figure 4-10.

Figure Exported: 9/14/2018 By: ceagladlemon Using: C:\Users\ceagladlemon\OneDrive - Woodard & Curran\PC\Folders\Desktop\11078-003 - Cuyama01 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fgd-10 NWQMC USGS IRLP GWO Sites.mxd

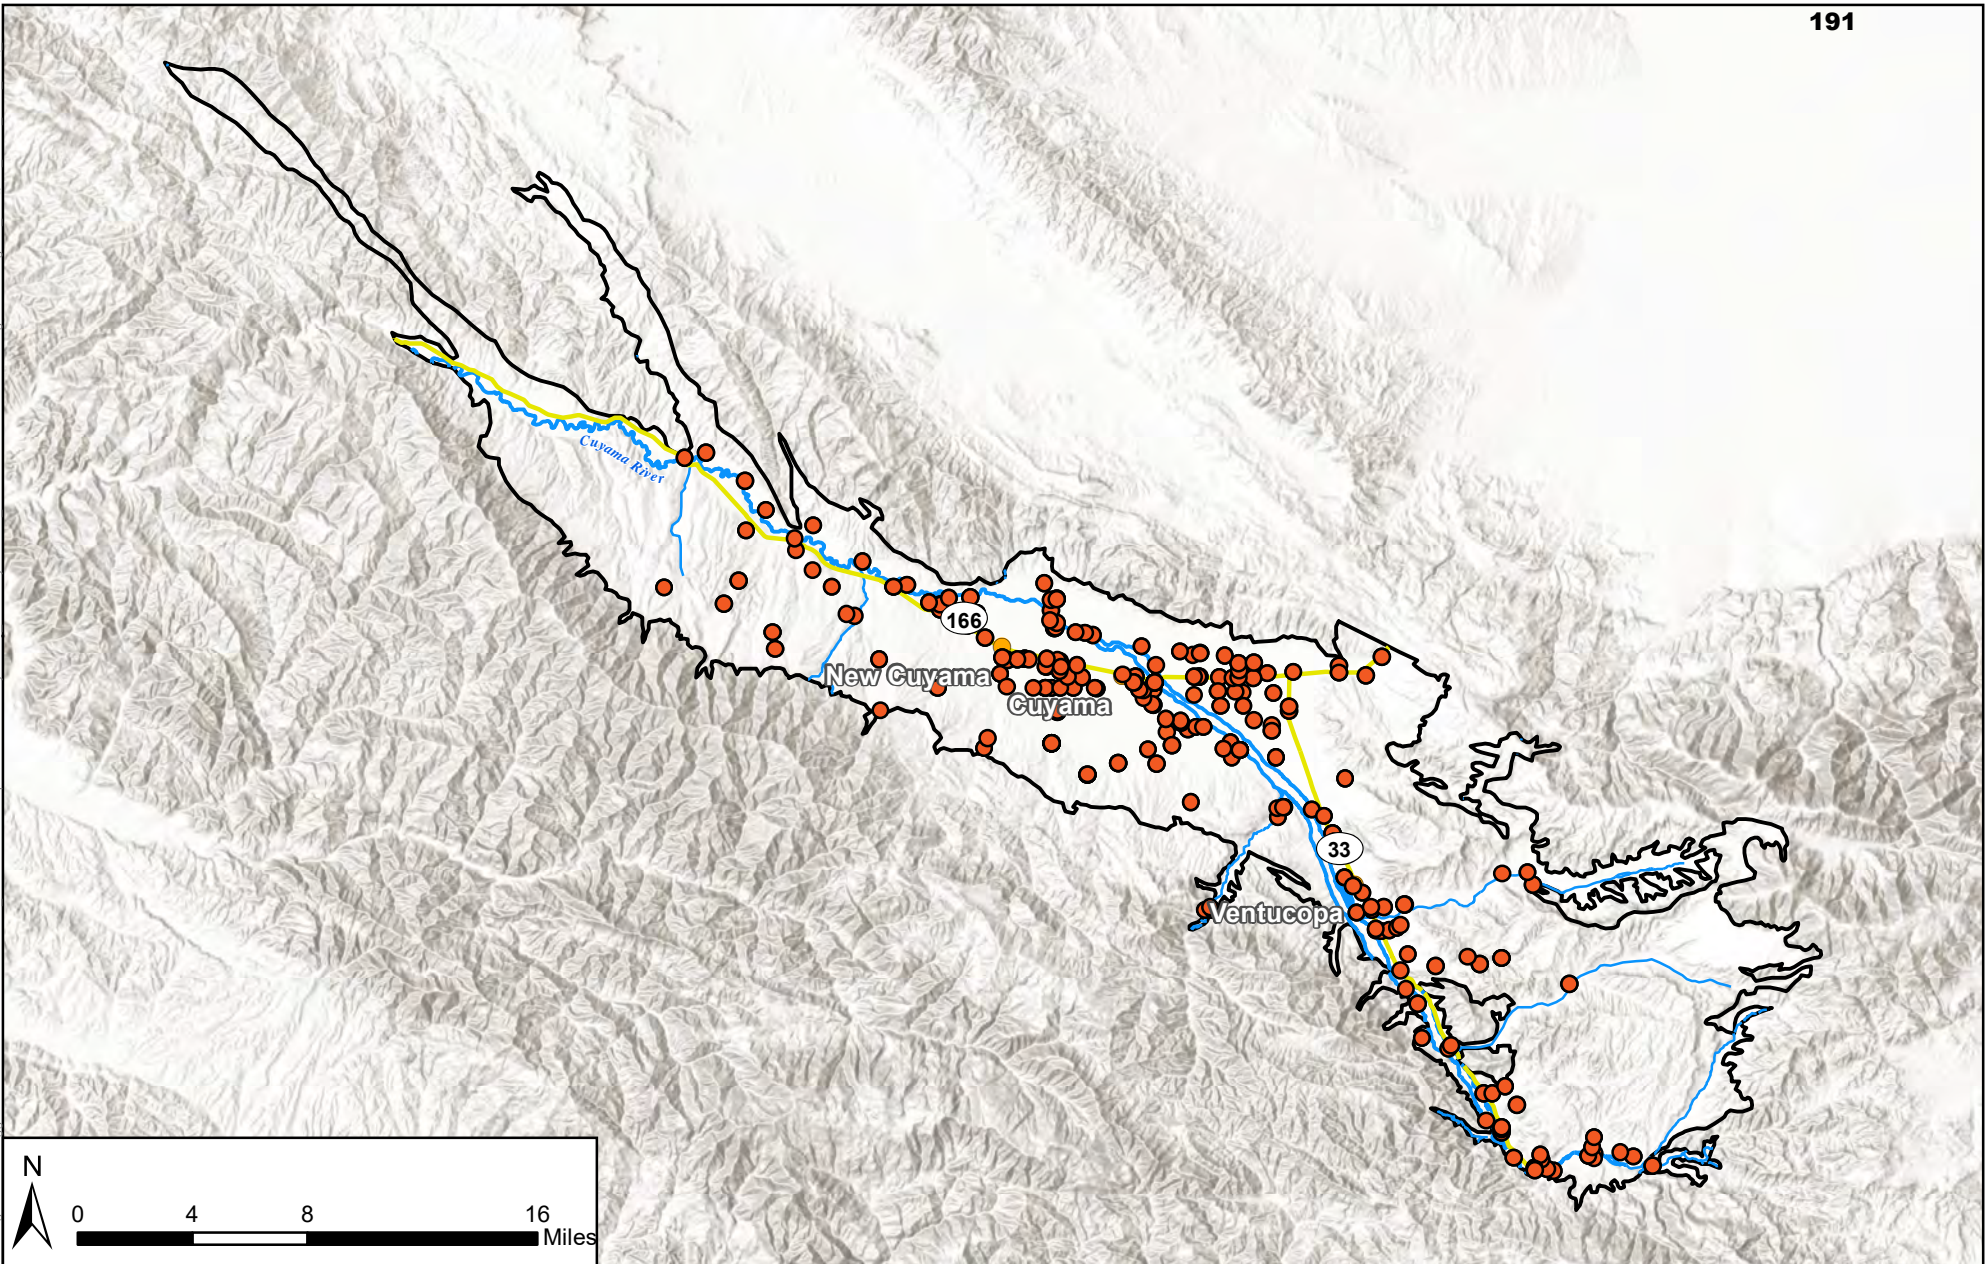


Figure 4-10: Cuyama GW Basin USGS/NWQMC/IRLP Groundwater Quality Monitoring Sites

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018



Legend

- Cuyama Basin
- USGS/NWQMC/IRLP Groundwater Quality Sites
- Towns
- Highways
- Cuyama River
- Streams

GAMA / DWR

The Groundwater Ambient Monitoring and Assessment (GAMA) Program is the State of California's groundwater quality monitoring program created by the State Water Resources Control Board in 2000, and later expanded by Assembly Bill 599, the Groundwater Quality Monitoring Act of 2001 (DWR GAMA 2018). The purpose of GAMA is to improve statewide comprehensive groundwater monitoring and increase the availability of information to the general public about groundwater quality and contamination information. Additionally, GAMA aims to establish groundwater quality on basin wide scales, continue with groundwater quality sampling and studies, and centralize the information and data for the public and decision makers to enhance groundwater resource protection.

DWR also publishes statewide water quality data via the California Natural Resources Agency. Access to DWR and GAMA information and data is accessible through separate online portals.

There are 213 GAMA and DWR groundwater quality monitoring sites within the Basin. Summary statistics for these sites is included in Table 4-10.

GAMA / DWR Water Quality Monitoring Sites	
Number of measurement sites	213
Earliest measurement date year	1942
Longest period of record	41 years
Median period of record	<1 year
Median number of records for a single site	2

Table 4-10: Cuyama Basin GAMA / DWR Groundwater Quality Monitoring Sites Summary Statistics

The GAMA / DWR groundwater quality monitoring locations are spread throughout the Basin, loosely following the Cuyama River. There are currently 60 water quality monitoring sites per 100 miles² within the Basin. These locations can be seen in Figure 4-11.

Figure Exported: 9/14/2018 10:14:20 AM By: ceagleton Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\PC\Folders\Desktop\011078-003 - Cuyama01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring_Network\Fig-11_GAMA_DWR_GWQ_Sites.mxd

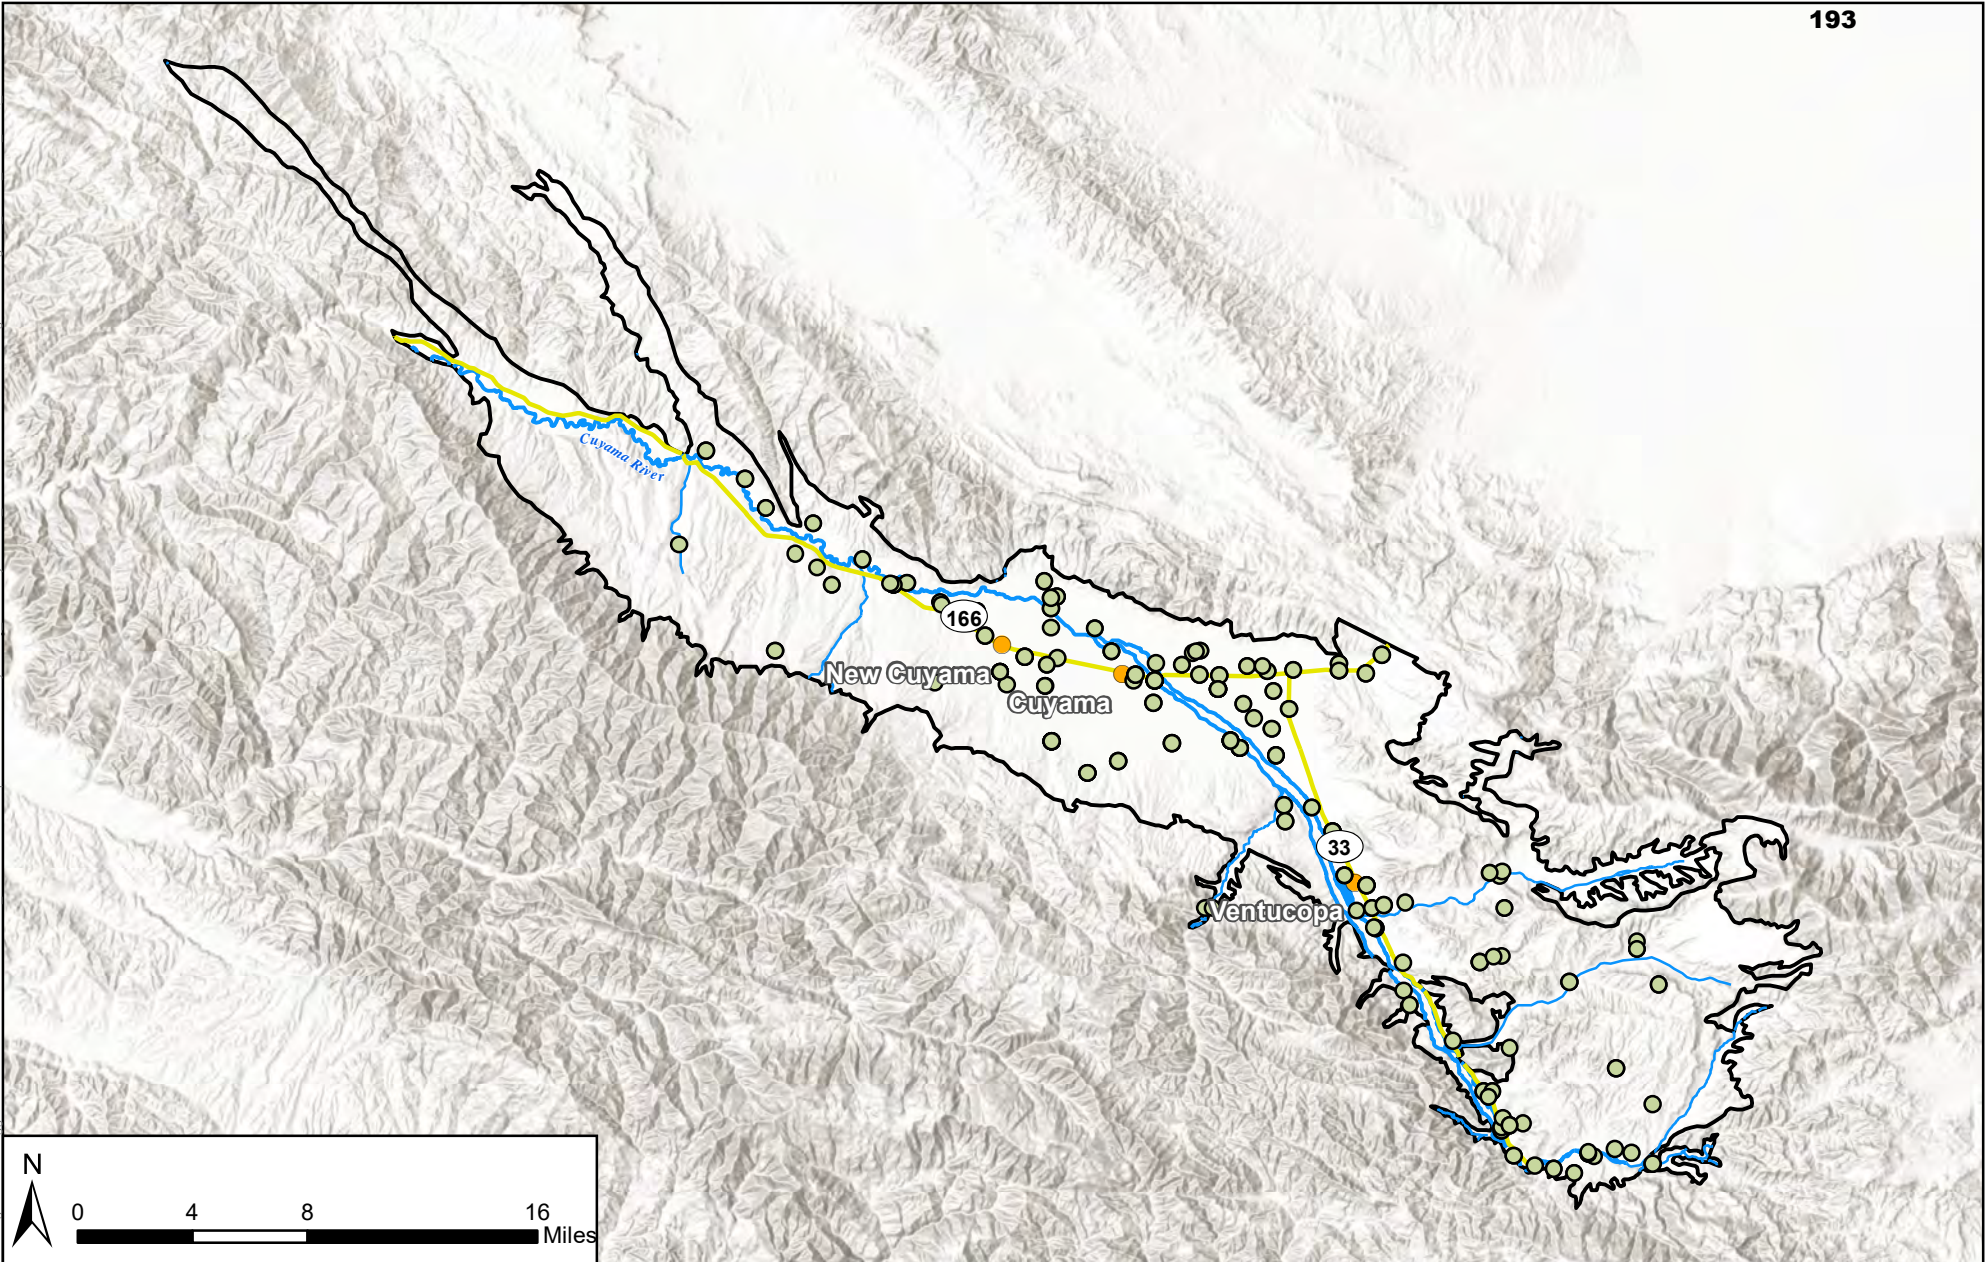


Figure 4-11: Cuyama GW Basin GAMA/DWR Groundwater Quality Monitoring Sites

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018



Legend

- Cuyama Basin
- GAMA/DWR Groundwater Quality Sites
- Towns
- Highways
- Cuyama River
- Streams


Cuyama Community Services District

The Cuyama Community Services District (CCSD) currently operates one production well for residential distribution within the Basin. Although some data for this well is included in the NWQMC dataset, annual Consumer Confidence Reports from 2011 to 2017 were processed for additional water quality data measurements. Summary Statistics for the CCSD well are included in Table 4-11 and the location is shown in Figure 4-12.

CCSD Water Quality Monitoring Site	
Number of measurement sites	1
Earliest measurement date	2008
Period of record	10 years
Number of records	21

Table 4-11: Cuyama Basin CCSD Water Quality Site Summary Data

Figure Exported: 1/25/2019, By: ceagleton, Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\ PC\Folders\Desktop\Current Projects\011078-003 - Cuyama01 - Local Cuyama GIS - 20180803\MXD\Text\Monitoring Network\Fig4-12 - CCSD - GWQWell.mxd

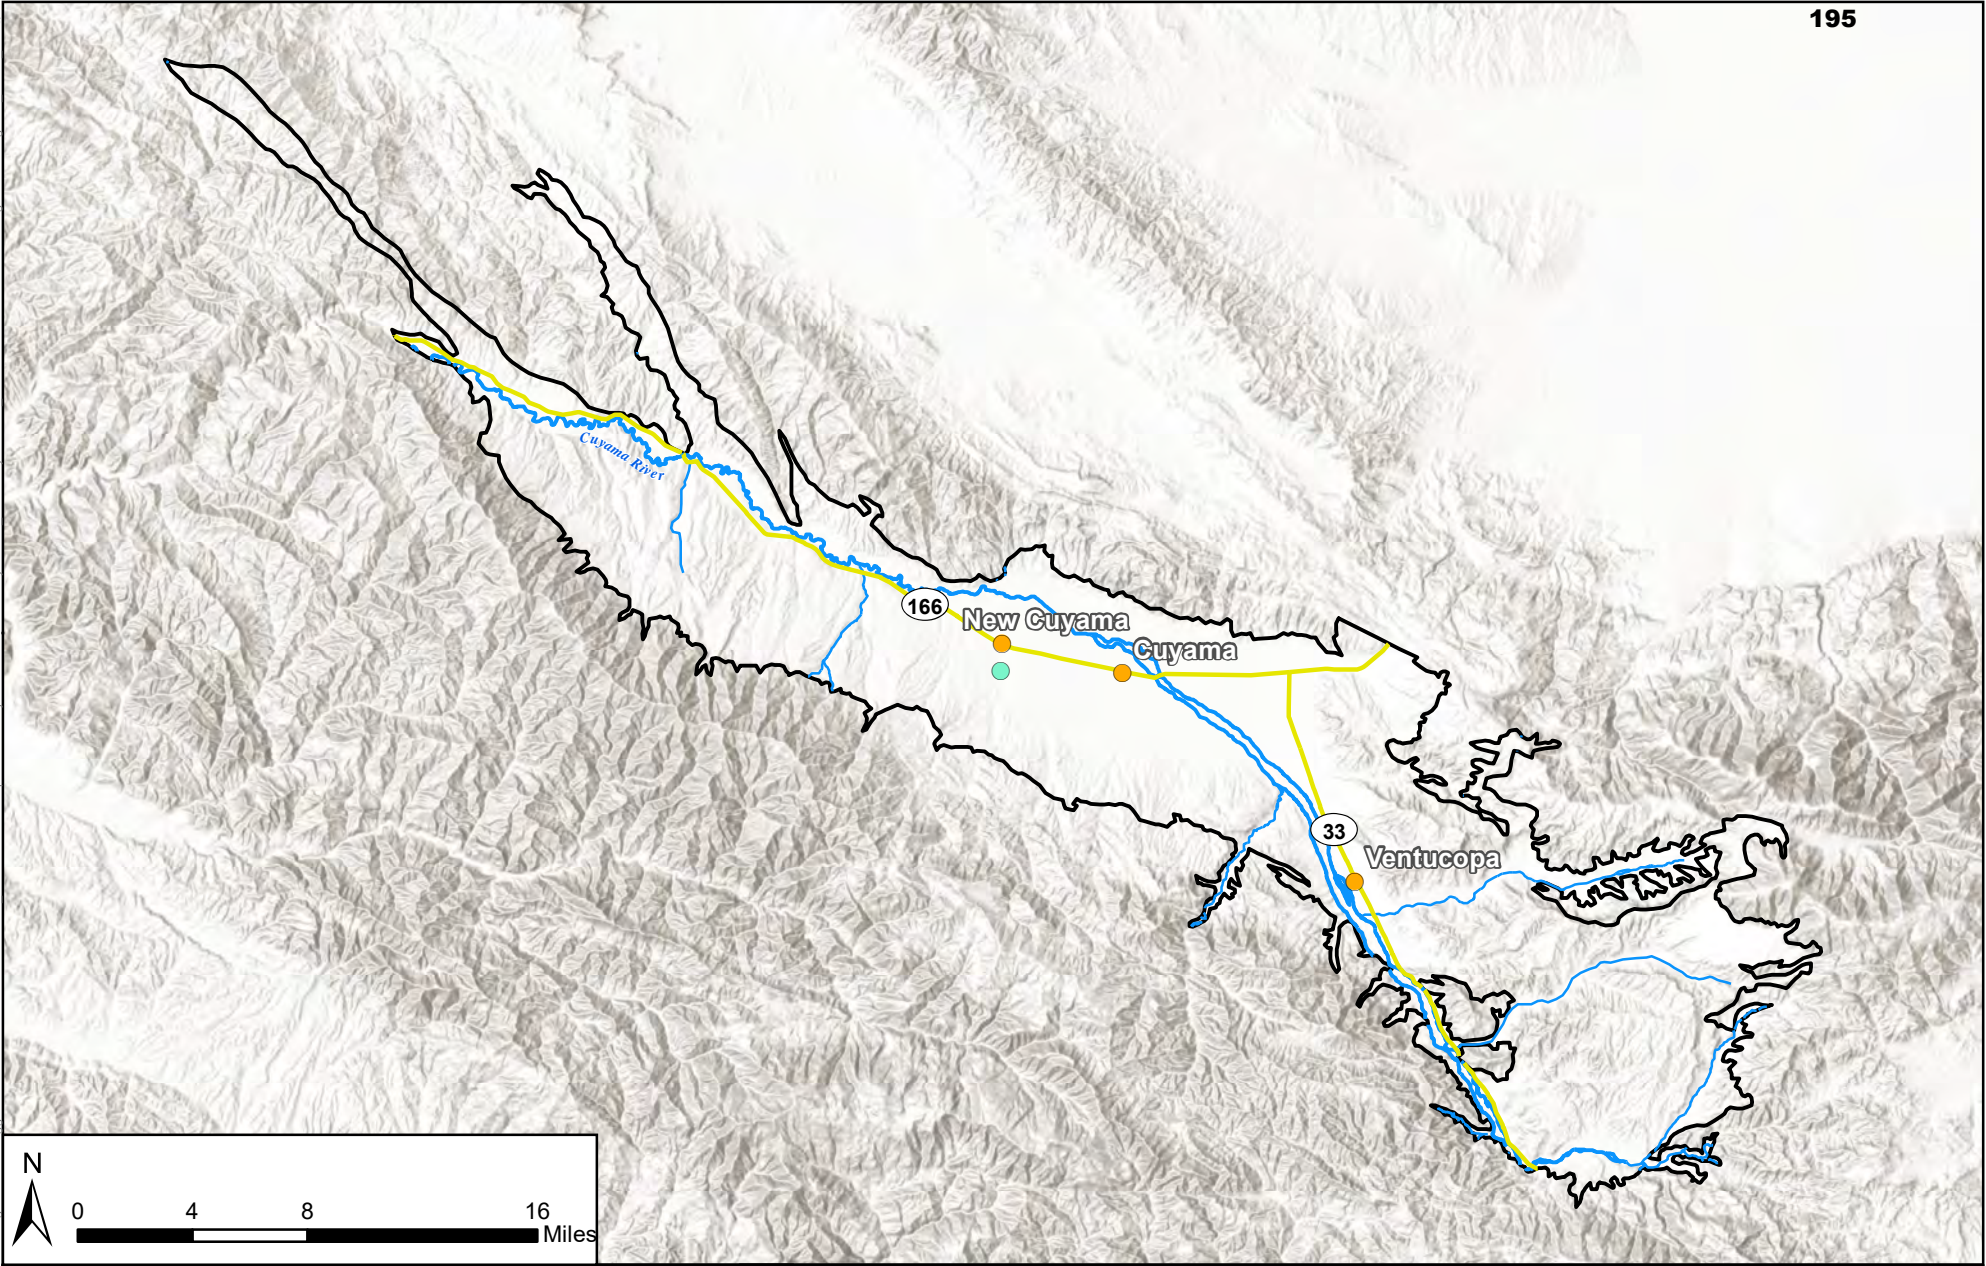

**Figure 4-12: Cuyama GW Basin
CCSD Groundwater Quality Well**

Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 January 2019



Legend

- Cuyama Basin
- Cumaya Community Services District Water Quality Monitoring Well
- Towns
- Highways
- Cuyama River
- Streams


Ventura County Watershed Protection District

VCWPD has 51 groundwater wells that have been utilized for groundwater quality monitoring within the Basin. All of the wells are incorporated into the DWR, GeoTracker, or USGS datasets. Sampling data includes numerous water quality constituents, however, this GSP only addresses TDS. Summary statistics for the wells are included in Table 4-12, and locations of these wells are included in Figure 4-13.

VCWPD Water Quality Monitoring Sites	
Number of measurement sites	51
Earliest measurement date	1957
Longest period of record	45
Median period of record	7
Median number of records for a single site	5

Table 4-12: Cuyama Basin VCWPD Water Quality Sites Summary Data

Figure Exported: 9/14/2018 10:14:20 AM By: ceagleton Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\PC\Folders\Desktop\011078-003 - Cuyama\01 - Cuyama\01 - Local\Cuyama GIS - 20180803\MXD\Text\Monitoring_Network\Fpd-12_VCWPD_GWQWells.mxd

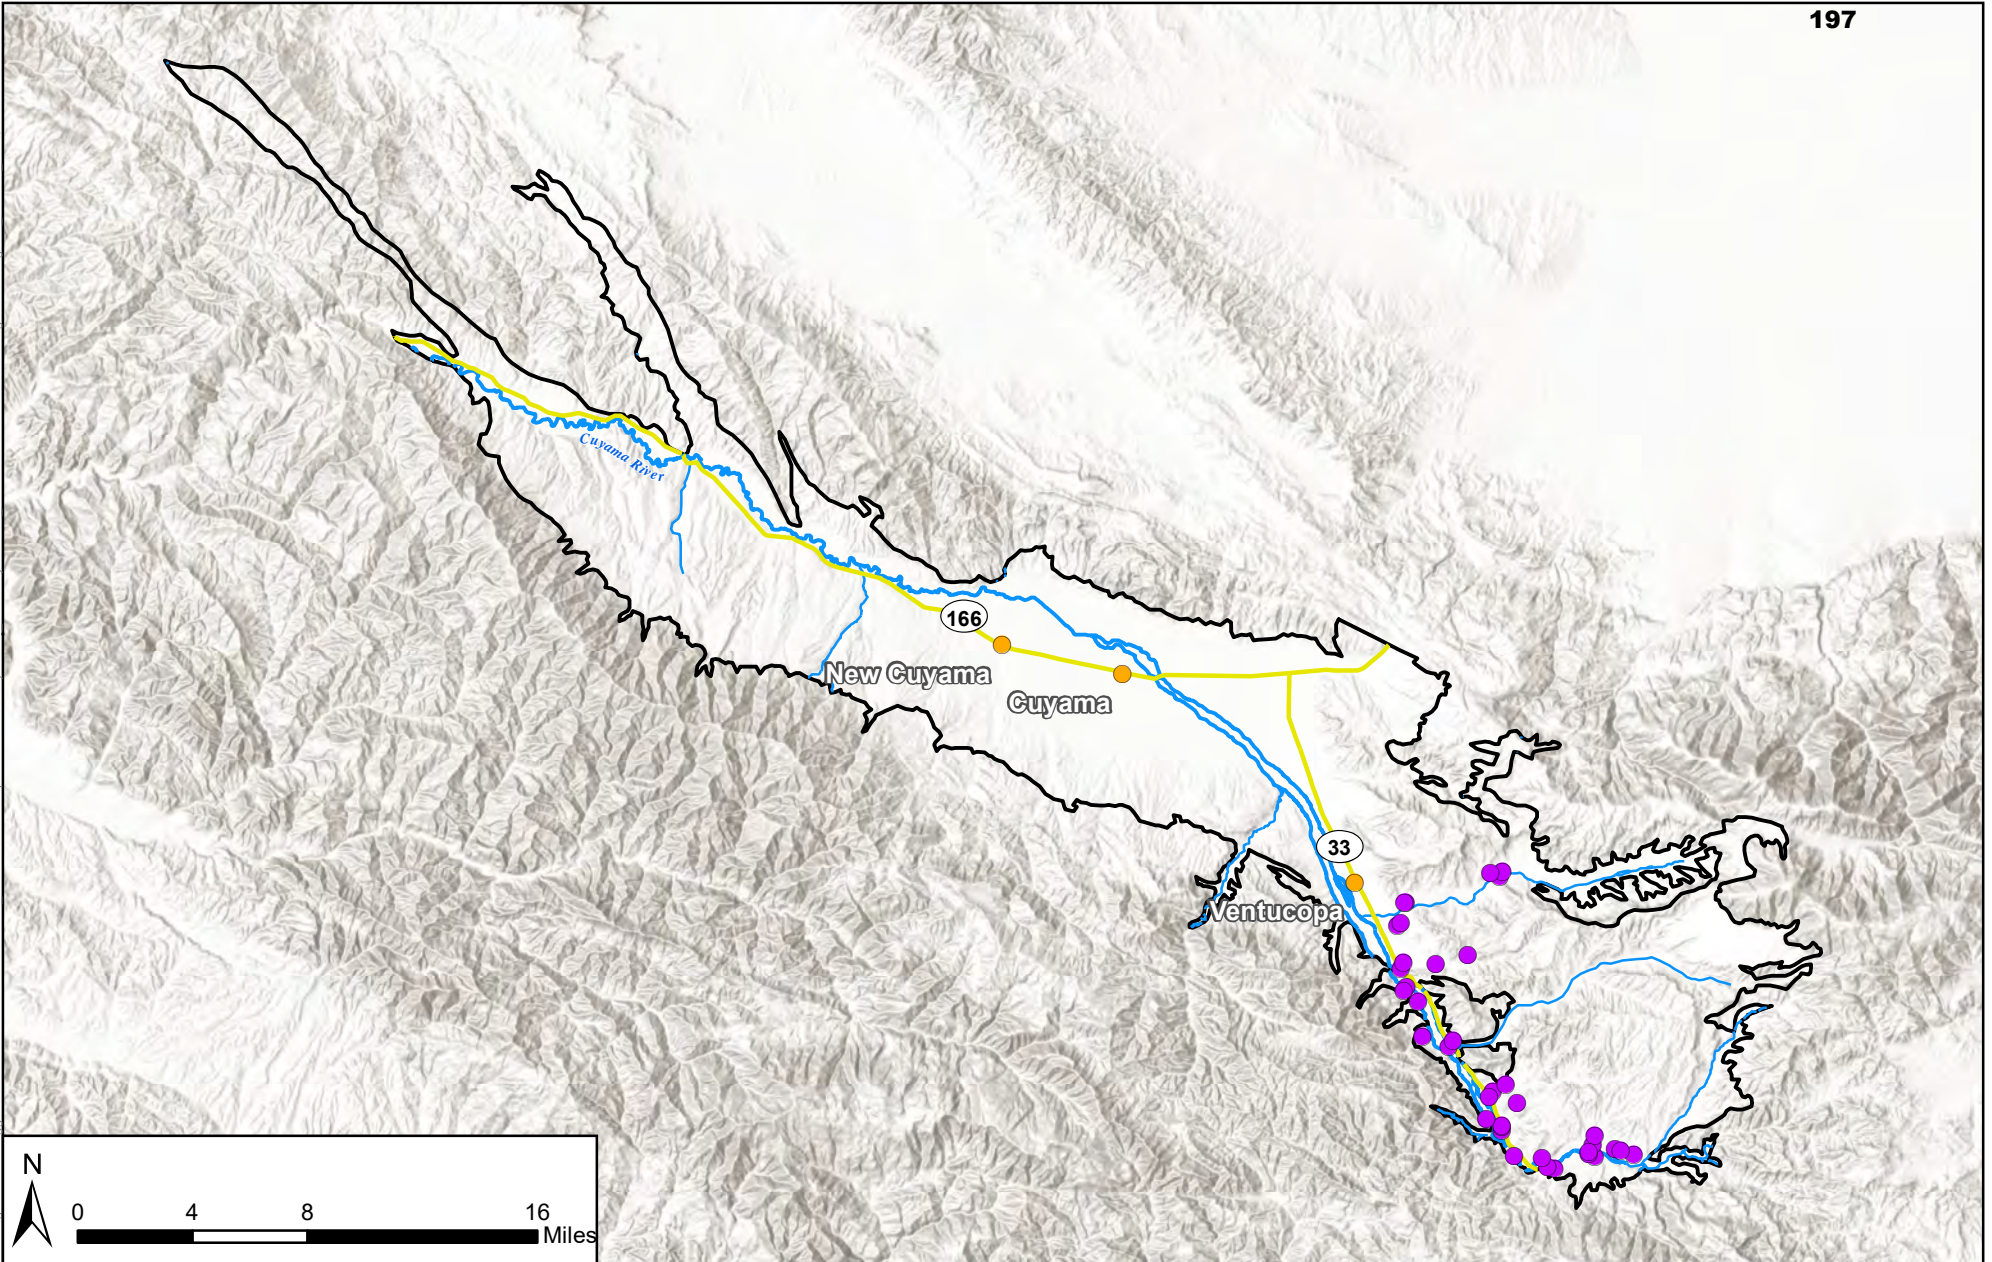

**Figure 4-13: Cuyama GW Basin
VCWPD Groundwater Quality Wells**

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater
Sustainability Plan

September 2018



Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- Ventura County Watershed Protection District Groundwater Quality Monitoring Wells

Private Landowners

Private landowners within the Basin conducted groundwater quality testing, which has been incorporated into this document and associated analysis. Eleven wells measured Total Dissolved Solids in 2015. Summary statistics for these sites can be included in Table 4-13 and locations are included in Figure 4-14.

Private Landowner Water Quality Monitoring Sites	
Number of measurement sites	11
Earliest measurement date	1/12/2015
Longest period of record	N/A
Median period of record	N/A
Median number of records for a single site	1

Table 4-13: Cuyama Basin Landowner Water Quality Sites Summary Data

Figure Exported: 9/14/2018 10:14:18 AM By: ceagleton Using: C:\Users\ceagleton\OneDrive - Woodard & Curran\PC\Folders\Desktop\OneDrive - Woodard & Curran\Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fgd-13 PrivateLandowner GWQ Sites.mxd


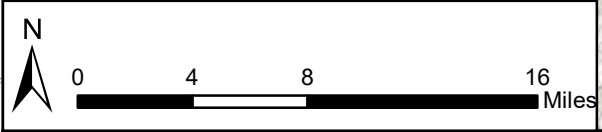


Figure 4-14: Cuyama GW Basin Private Landowner Groundwater Quality Monitoring Sites

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018

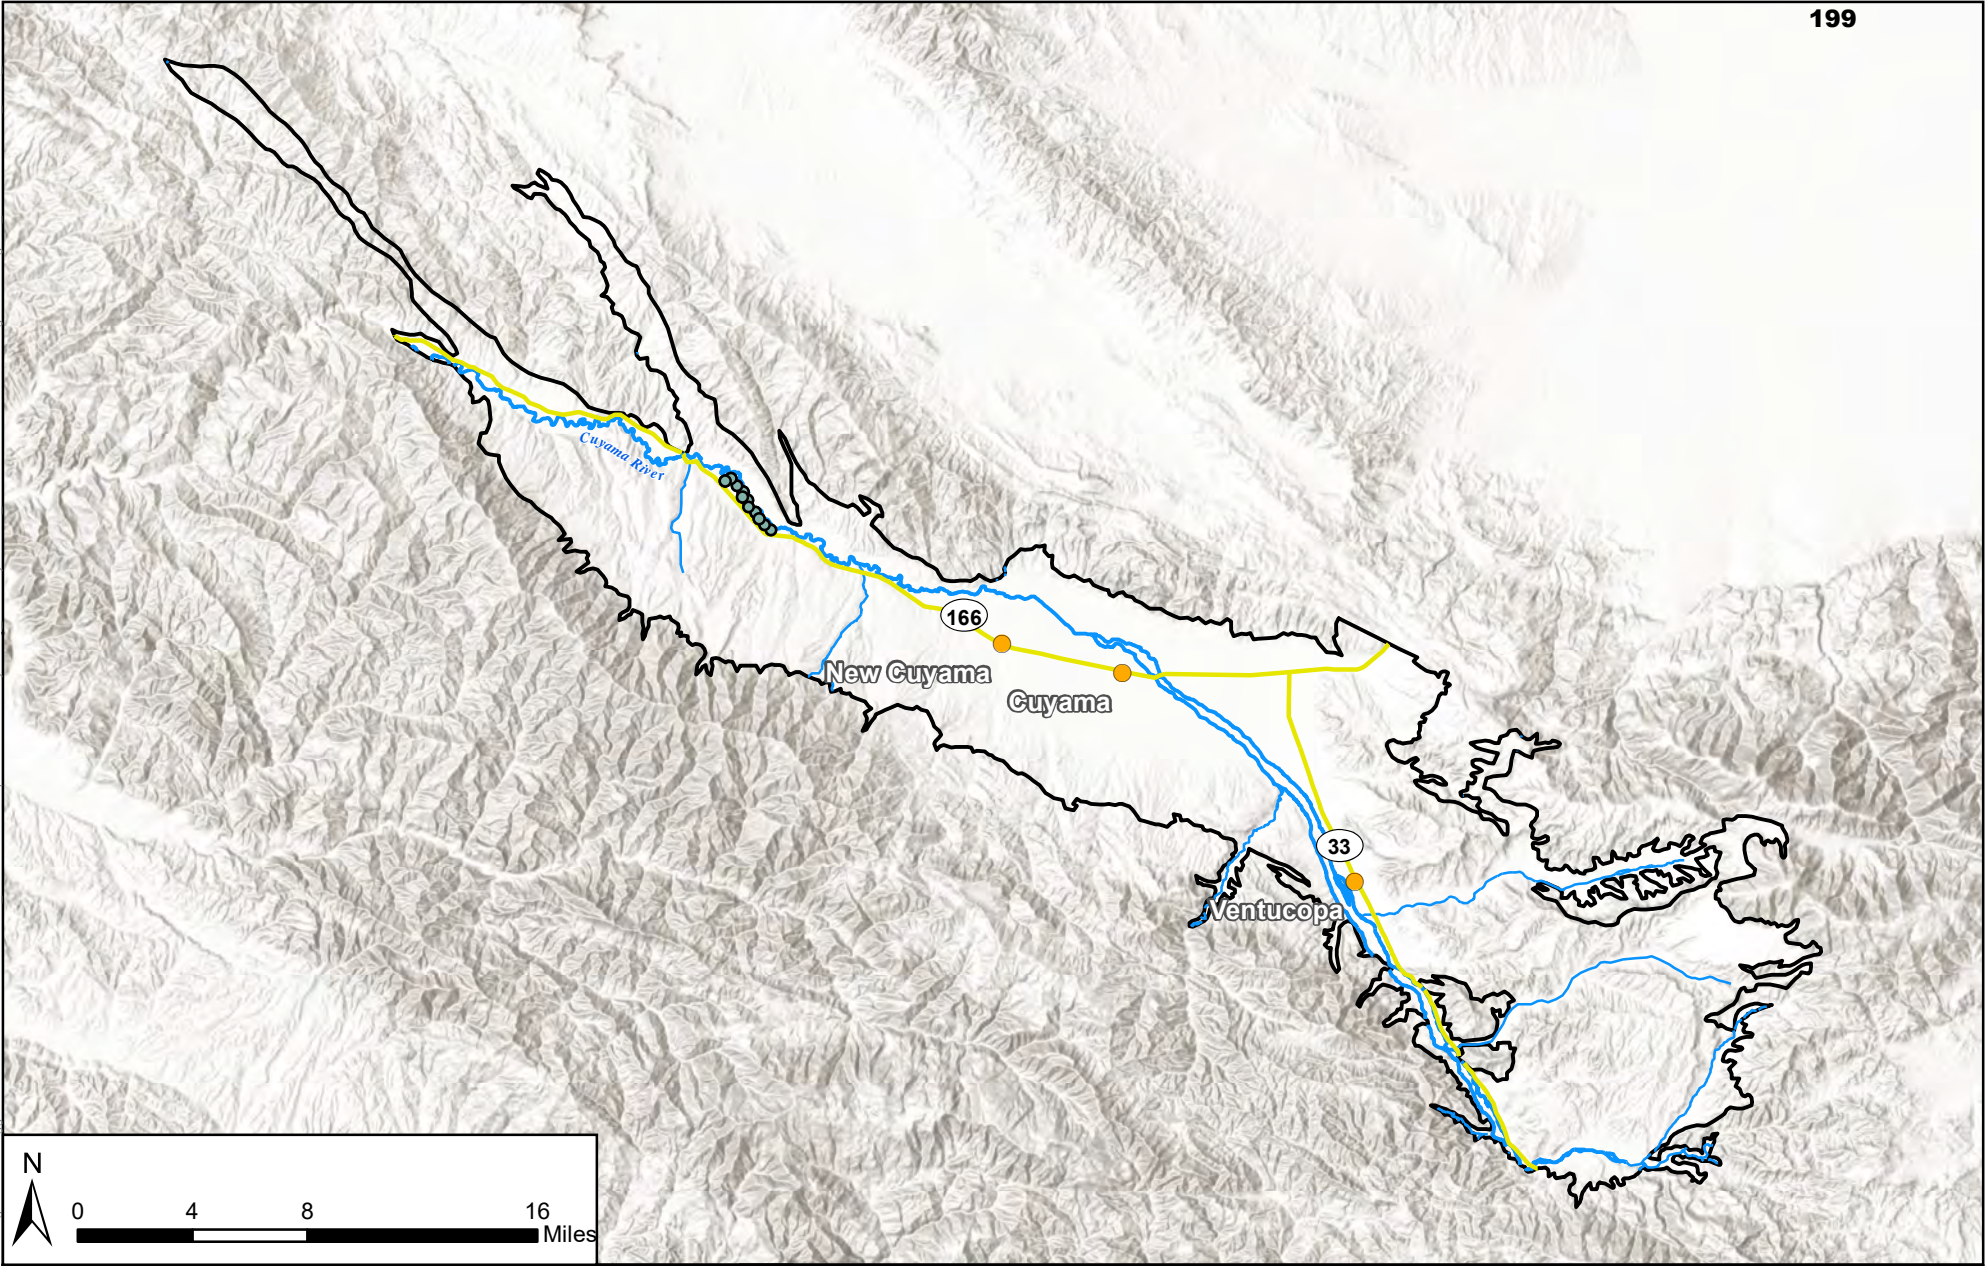

Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Streams
- Private Landowner Groundwater Quality Monitoring Sites

4.3.4 Subsidence Monitoring

Subsidence is the sinking or downward settling of the earth's surface and is often the result of over-extraction of subsurface water. Subsidence can be directly measured in a few different methods such as with LiDAR or InSAR, Continuous Geographic Positioning System (CGPS), Extensometers, and Spirit Leveling. For more information, see Appendix Z in the Groundwater Conditions chapter, which contains further information about these methods and the physics behind land subsidence. The subsidence monitoring network currently described below for the Cuyama Basin assumes the use of extensometers to monitor subsidence in the Basin. However, the GSA should evaluate other methods, including LiDAR and InSAR as well during the implementation phase to identify the optimal approach.

The Basin hosts two CGPS stations with three others just outside the Basin's boundary, as shown in Figure 2.2-22. CGPS stations measure surface movement in all three axis directions; up/down, east/west, and north/south. CGPS stations are placed in the center of the Cuyama Valley to measure subsidence, while other are placed on ridges around the valley to also measure tectonic movements.

4.3.5 Surface Water Monitoring

Surface water monitoring within the Basin is conducted through stream and river gages placed along the Cuyama River or one of its tributaries. USGS manages most flow gages in California, and currently operates one active stream gage along Santa Barbara Creek. There is an additional gage (ID 11136800) along the Cuyama River downstream of the Basin before Twitchell Reservoir, however, this gage also receives water from non-Cuyama Basin watershed areas. Data for surface flow gages is obtained through the NWIS Mapping portal (USGS NWIS 2017). Existing and discontinued gages are included in Figure 4-15.

USGS has operated three additional gages within the Basin, however, two of those gages were discontinued in the 1970's. Gage ID 11136500 operated from 1945 to 1958 and was brought back into service from 2009 to 2014.

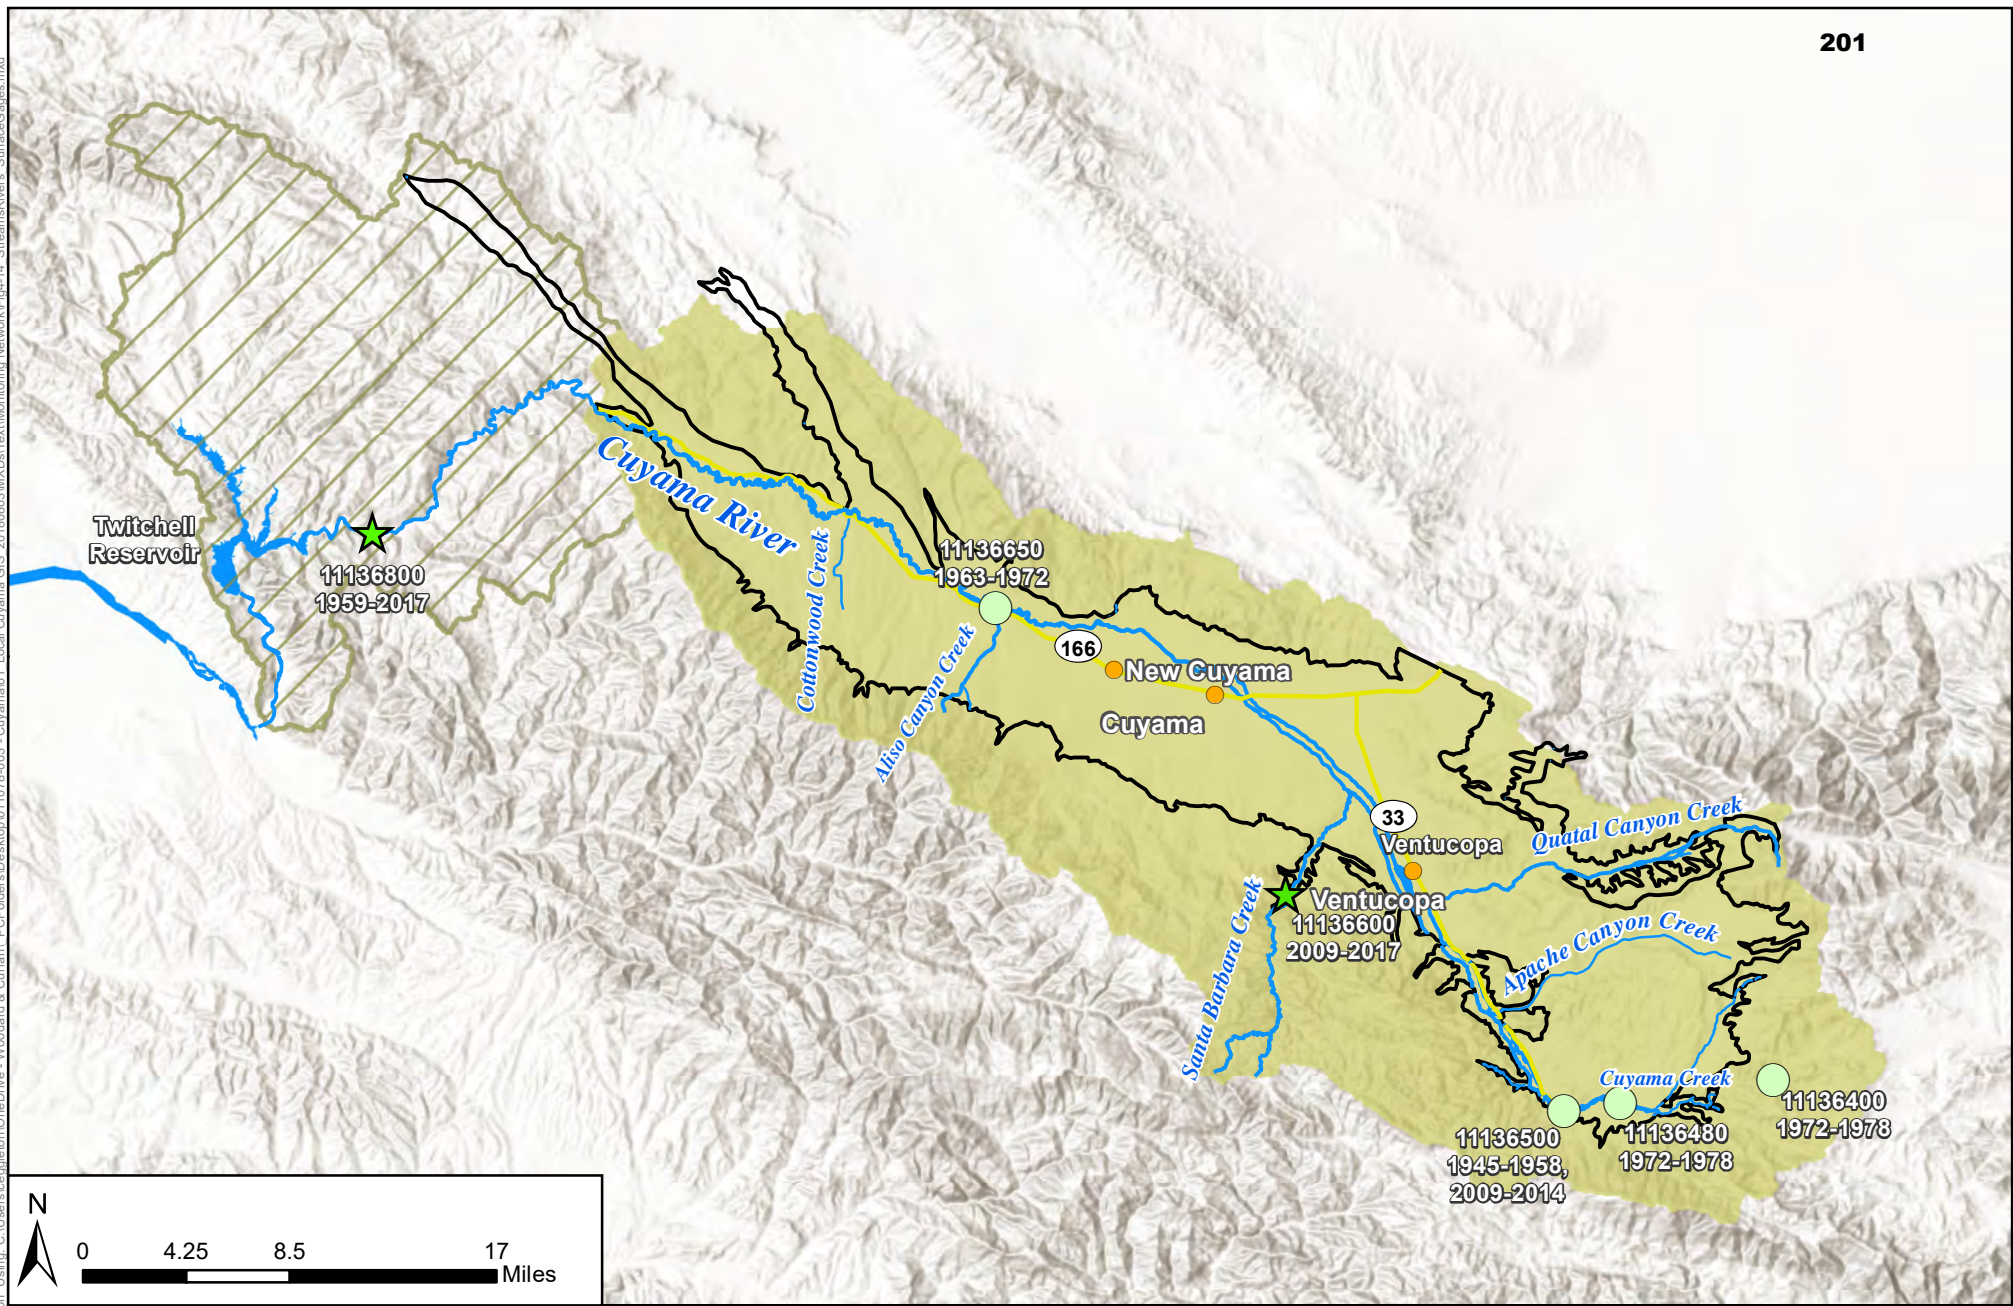


Figure 4-15: Rivers, Streams, and Surface Flow Gages

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018



Legend

- Cuyama Basin
- Towns
- Highways
- Cuyama River
- Inactive Flow Gages
- ★ Active Flow Gages
- Cuyama Watershed**
- Contributes to Cuyama GW Basin
- Does Not Contribute to Cuyama GW Basin

Figure Exported: 9/14/2018 8:00 AM By: cenglighten Using: C:\Users\cenglighten\OneDrive - Woodard & Curran\PCF\Folders\Desktop\011078-003 - Cuyama01 Local Cuyama GIS 20180803\MXD\Text\Monitoring Network\Fig4-14 - StreamRivers - SurfaceGages.mxd

4.4 Monitoring Rationales

This section discusses the reasoning behind monitoring network selection. Monitoring networks in the Cuyama Basin GSP were developed to ensure that they were able to detect changes in basin conditions so that the Cuyama Basin Groundwater Sustainability Agency (CBGSA) can manage the basin to ensure the basin's sustainability goal is met, and that no undesirable results are present after 20 years of sustainable management.

The monitoring networks were selected specifically to detect short term, seasonal, and long term trends in groundwater levels and storage. The monitoring networks have been selected to include an adequate amount of temporal frequency and spatial density to evaluate information about groundwater conditions that are necessary to evaluate the effectiveness of projects and management actions undertaken by the GSA.

Explanations of how each monitoring network will be developed and implemented will be described in the projects and management actions section of the GSP as individual projects that the GSA will undertake as part of GSP implementation. The schedule and costs associated with developing and implementing each network will be discussed in the Implementation Section of the GSP.

4.5 Groundwater Level Monitoring Network

Groundwater level monitoring is conducted through a groundwater well monitoring network. This section will provide information on how the level monitoring network was developed, criteria for selecting representative wells, monitoring frequency, spatial density, summary protocols, and identification and strategies to fill data gaps.

4.5.1 Management Areas

Management Areas have not been selected at the time of writing this GSP section. Management Areas allow flexibility in establishing monitoring networks both spatially and temporally to match conditions and use in the management area. At this time, it is recommended due to the sparsity of monitored wells to use the same monitoring network selection criteria across all management areas in the basin.

4.5.2 Monitoring Wells Selected for Monitoring Network

A set of well tiering criteria were created to rank existing groundwater level measuring sites within the basin into six different tiers, shown in Figure 4-16.

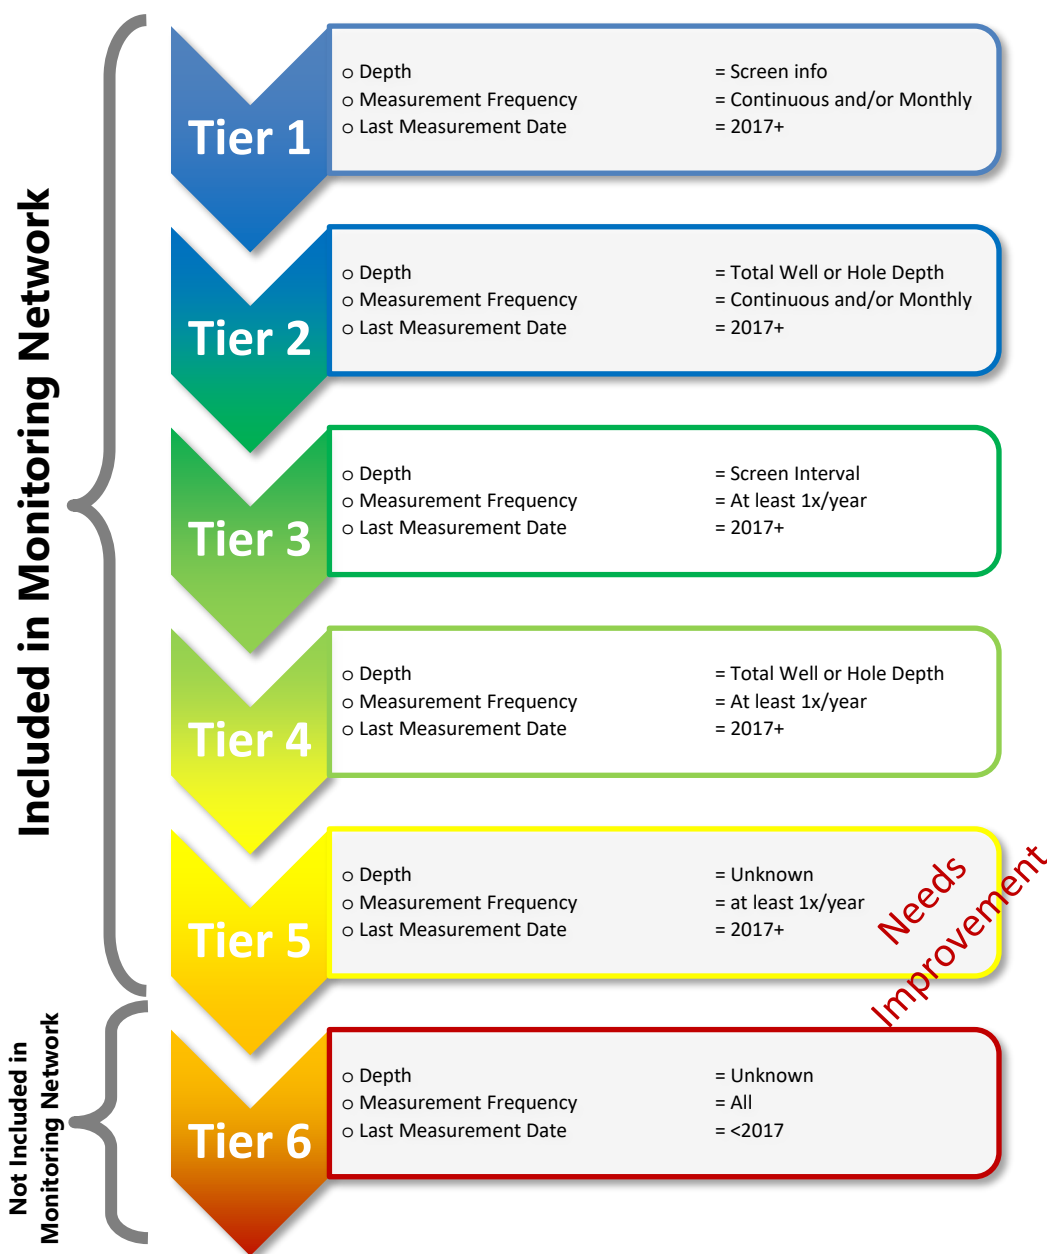


Figure 4-16: Cuyama Well Tiering Criteria

Tier 1 encompasses wells with the most amount of metadata as well as consistent water elevation data that are still operating and functional. As tiering levels increase, requirements around well metadata and frequency of monitoring decrease, but all the wells are still active and functioning. Tier 5 captures the remaining “active” wells, but the metadata and/or frequency of monitoring would benefit from improvement.

Tier 6 includes all other wells that are no longer operational, which are categorized as those who do not have recorded data from January 1, 2017 to August 1, 2018. This approximate two-year cut off was determined as being a reasonable amount of time for a monitoring agency or organization to obtain, log, and report well information and measurements, and as an indicator of whether a well was currently monitored or not.

Table 4-13 shows the number of monitoring wells selected from each existing monitoring data maintaining entity.

Monitoring Data Maintaining Entity	Number of Wells Selected for Monitoring Network
CASGEM	28
USGS	43
SBCWA	30
SLOCFC&WCD	2
VCWPD	5
CCSD	1
Private Landowner	43
Total	89

Note: Total does not equal sum of rows due to duplicate entries in multiple databases

Table 4-14: Number of Wells Selected for Monitoring Network

Figure 4-17 shows the Monitoring Network wells by their Tier level.

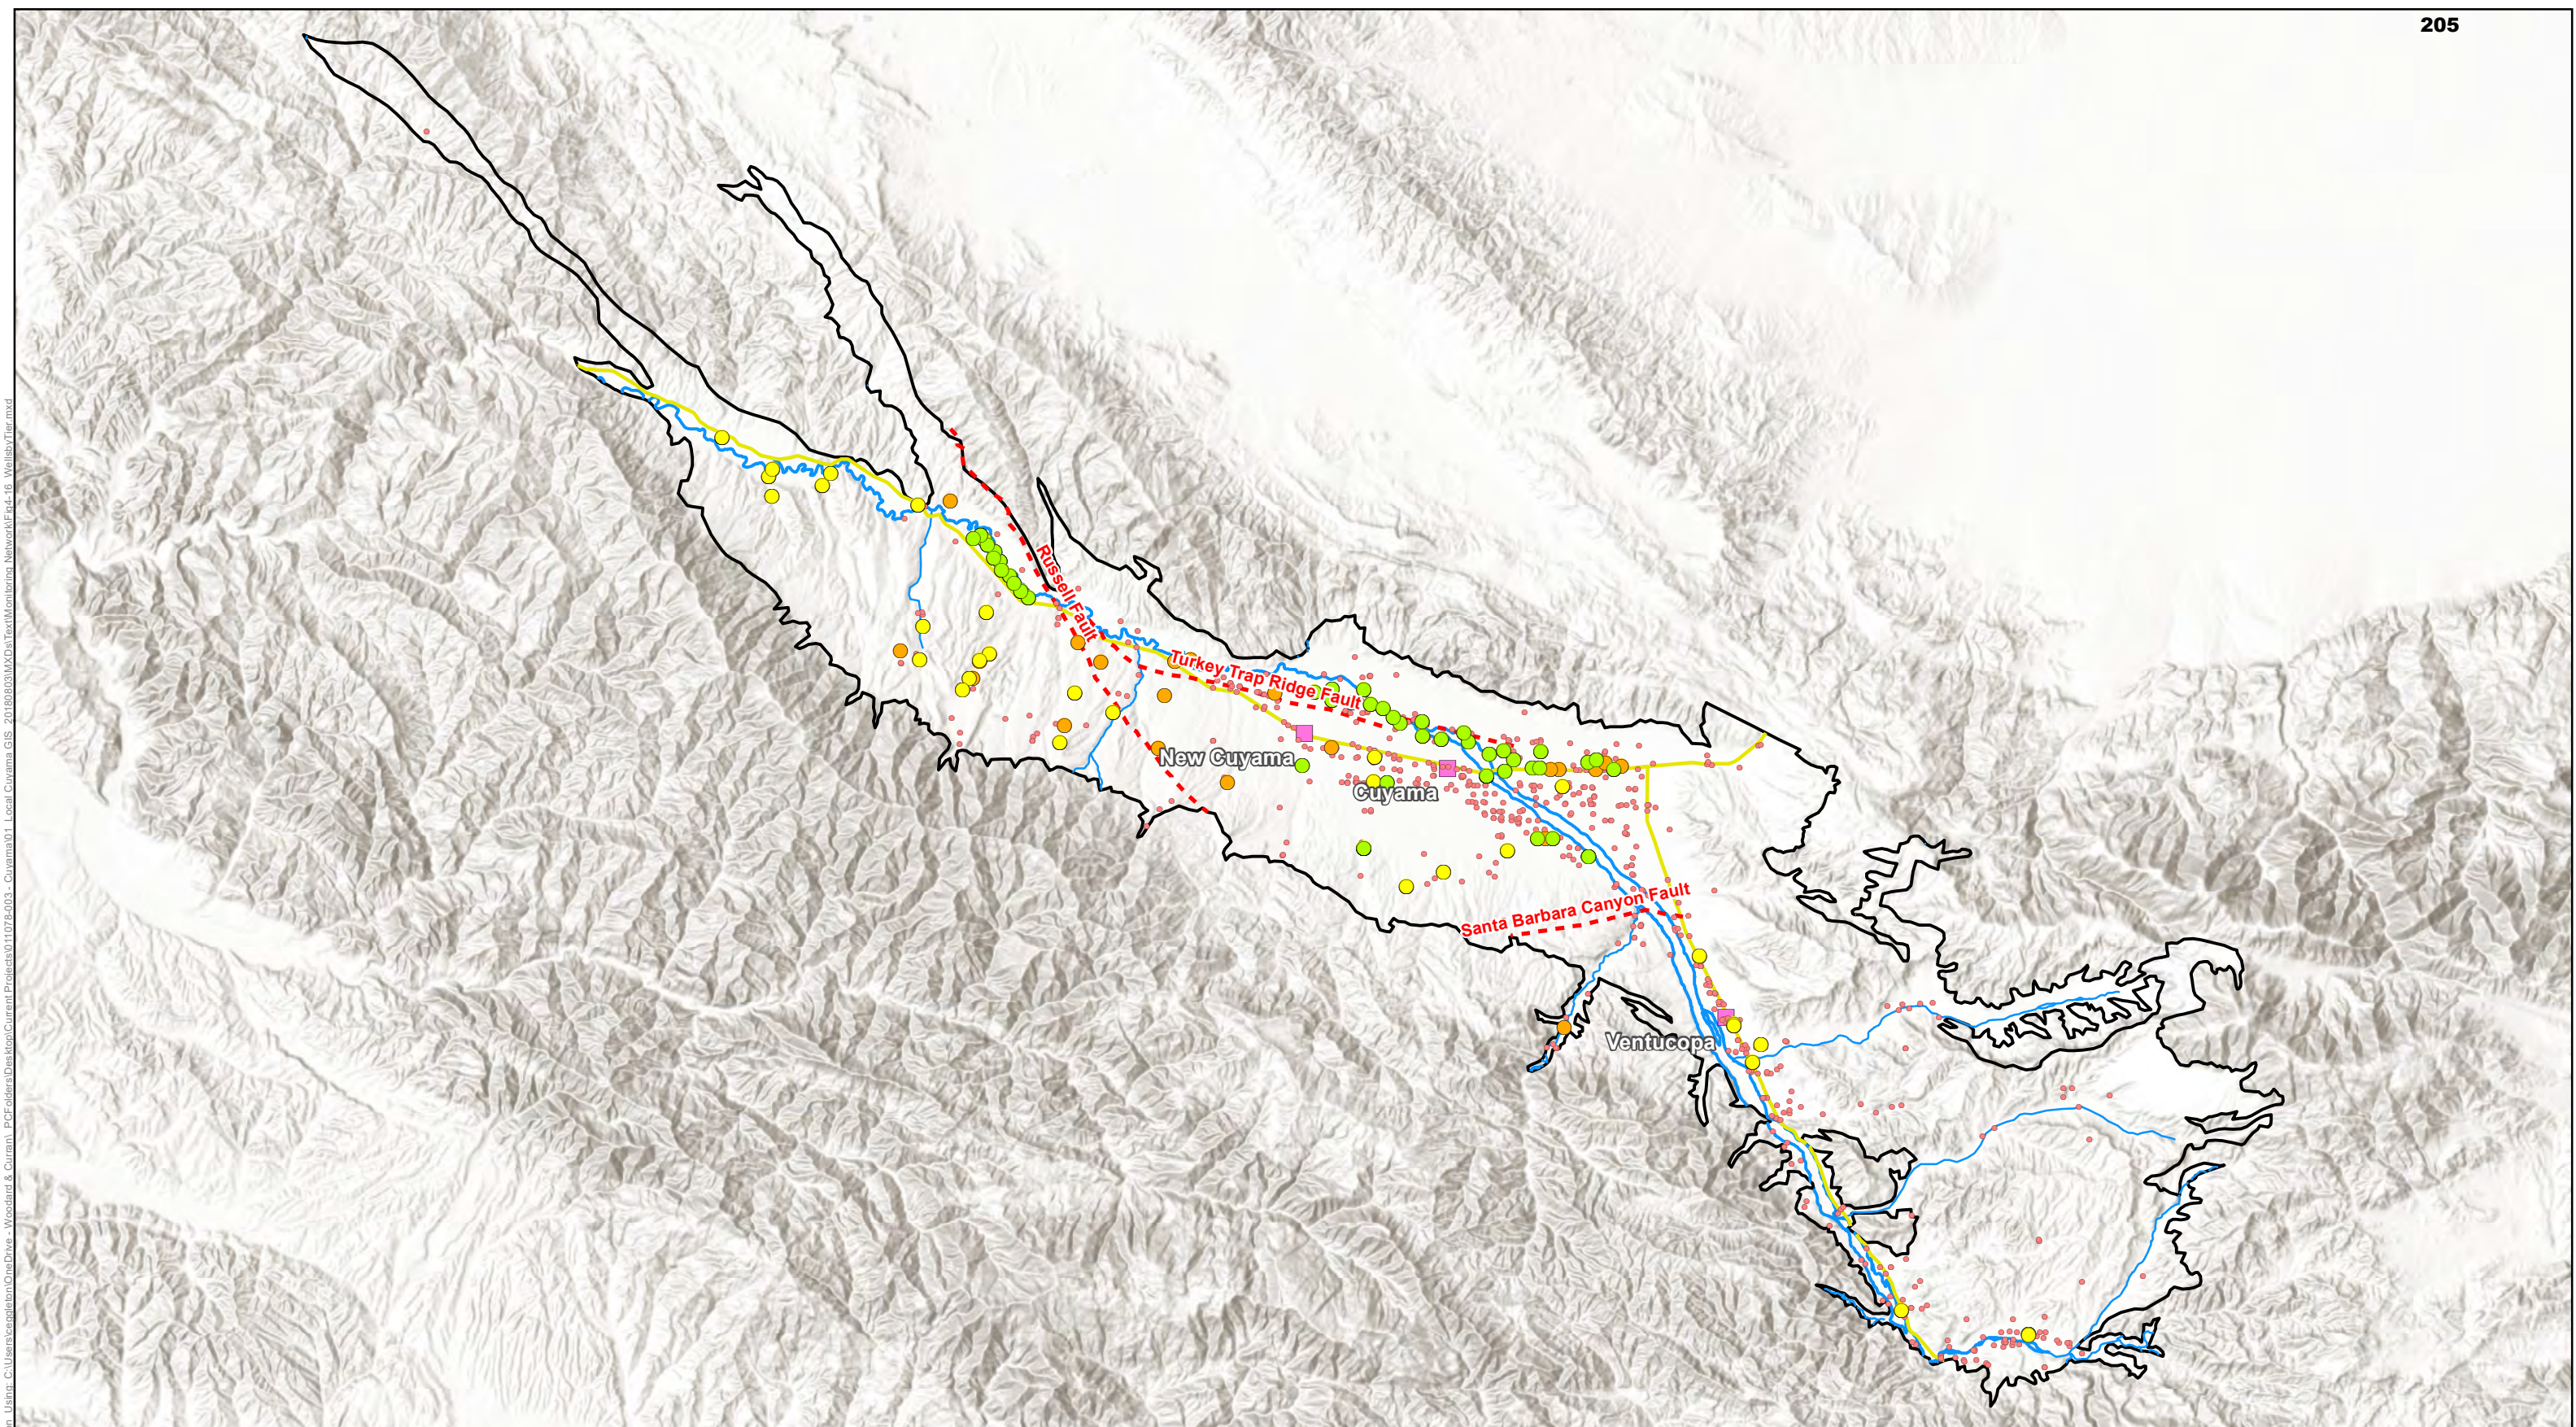


Figure 4-17: Cuyama GW Basin Groundwater Level Wells by Tier

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

January 2019



Legend

- | | | | |
|--------------|--------------|---------------------------------|--------|
| Cuyama Basin | Faults | Monitoring Network Wells | |
| Towns | Highways | Tier 1 | Tier 4 |
| | Cuyama River | Tier 2 | Tier 5 |
| | Streams | Tier 3 | Tier 6 |




Figure Exported: 1/16/2019 10:46:20 AM by: ceapleton Using: C:\Users\ceapleton\OneDrive - Woodard & Curran\PCF\Projects\Current\Projects\01076-003 - Cuyama\01 Local Cuyama GIS 20180803\MXD\Text\Monitoring_Network\Fig4-16_WellsbyTier.mxd

4.5.3 Monitoring Frequency

A successful monitoring frequency and schedule should allow the monitoring network to adequately interpret the fluctuations over time of the groundwater system based on shorter-term and long-term trends and conditions. These changes may be the result of storm events, droughts or other climatic variations, seasons, and anthropogenic activities such as pumping.

Monitoring frequency must, at a minimum, occur within the same designated time-period for all wells to ensure that measurements represent the same condition for the aquifer.

The *Monitoring Networks and Identification of Data Gaps Best Management Practices (BMP)* published by DWR provides guidance for the monitoring frequency based on the discussion presented in the *National Framework for Ground-water Monitoring in the United States (ACWI, 2013)*. This analysis and discussion provide guidance on monitoring frequency based on aquifer properties and degree of use, as shown in Table 4-15.

The guidance recommends that initial characterization of monitoring locations use frequent measurements to establish the dynamic range at each monitoring site and to identify external stresses affecting groundwater levels. An understanding of these conditions based on professional judgement should be reached before normal monitoring frequencies are followed.

Aquifer Type	Nearby Long-Term Aquifer Withdrawals		
	<i>Small Withdrawals</i>	<i>Moderate Withdrawals</i>	<i>Large Withdrawals</i>
<i>Unconfined Aquifer</i>			
“low” recharge (<5 inches/year)	Quarterly	Quarterly	Monthly
“high” recharge (>5 inches/year)	Quarterly	Monthly	Daily
<i>Confined Aquifer</i>			
“low” hydraulic conductivity (<200 feet/day)	Quarterly	Quarterly	Monthly
“high” hydraulic conductivity (>200 feet/day)	Quarterly	Monthly	Daily

Table 4-15: Monitoring frequency Based on Aquifer Properties and Degree of Use

The Basin is an unconfined aquifer with large withdrawals, with a “low” recharge rate of less than 5-inches per year. Based on the data in Table 4-15 provided by DWR, the Basin’s groundwater monitoring frequency should be on a monthly basis. This GSP recommends monitoring the groundwater level network monthly for the first three years of GSP implementation and consideration of reducing the monitoring frequency to quarterly measurements after that. Ideally, the monitoring network would be monitored simultaneously to gain a ‘snapshot’ of groundwater conditions. Since that is not practical monitoring of the level network should be conducted within one week for each measurement period.

4.5.4 Spatial Density

Spatial density of the monitoring network was considered both for the selection of the entire monitoring network, and for the selection of representative wells (Section 4.5.5) The goal of the groundwater level monitoring network is to provide adequate coverage of the entire aquifer within the Basin. This includes the ability to monitor and identify groundwater changes across the basin through time. Consideration of the spatial location of monitoring wells should include proximity to other monitoring wells and ensuring

adequate coverage near other prominent features such as faults or production wells. Monitoring wells in close proximity to active pumping wells could be influenced by groundwater withdrawals, thus skewing static level monitoring.

The *Monitoring Networks and Identification of Data Gaps BMP* published by DWR provides different sources and condition dependent densities to guide monitoring network implementation (Table 4-16). This information was adapted from the *CASGEM Groundwater Elevation Monitoring Guidelines* (DWR, 2010). While these estimates provide guidance to monitoring well site spatial densities, monitoring points should primarily be influenced by local geology, groundwater use, and GSP defined undesirable rates. Professional judgement is essential to determine final locations.

Reference	Monitoring Well Density (wells per 100 miles ²)
Heath (1976)	0.2-10
Sophocleous (1983)	6.3
Hopkins (1994)	
Basins pumping more than 10,000 AFY per 100 miles ²	4.0
Basins pumping between 1,000 and 10,000 AFY per 100 miles ²	2.0
Basins pumping between 250 and 1,000 AFY per 100 miles ²	1.0
Basins pumping between 100 and 250 AFY per 100 miles ²	0.7

Table 4-16: Monitoring Well Density Considerations

PRELIMINARY AND WILL BE UPDATED WHEN WATER BUDGET INFORMATION IS COMPLETE, it is estimated that the basin pumps approximately over 10,000 AFY per 100 square miles. The basin has 378 square miles of area. Based on Hopkins (1994), well density estimate guidelines, the Basin should have 4 monitoring wells per 100 square miles. Sophocleous (1983) recommends 6.3 monitoring wells per 100 square miles. Based on Heath (1976), the basin should have between 0.2 and 10 monitoring wells per 100 square miles. Due to the geologic and topographic variability within the basin, as well as the severity of groundwater declines and hydrogeologic uncertainty in various portions of the basin, this GSP recommends a density greater than the most conservative estimate of 10 wells per 100 square miles, which is over 38 monitoring wells.

4.5.5 Representative Monitoring

There are two categories of wells were identified within the monitoring network:

- **Representative Wells** – These wells will be used to monitor sustainability in the basin. Minimum thresholds and measurable objectives will also be calculated for these wells.
- **Supplemental Wells** – Other wells are included in the monitoring network to provide redundancy for representative wells, and to maintain a robust network for evaluation as part of five-year GSP updates.

Representative monitoring wells were selected as part of monitoring network development.

Representative monitoring wells are wells that represent conditions in the basin, and in locations that allow monitoring on the well to indicate the long term, regional changes in its vicinity.

Representative groundwater level and groundwater storage sites within each management area were selected by several different criteria. These include:

1. **Adequate Spatial Distribution** – Representative monitoring does not require the use of all wells that are spatially “clumped” together within a portion of the Basin. Adequately spaced wells will provide greater Basin coverage with fewer monitoring sites.
2. **Robust and Extensive Historical Data** – representative monitoring sites with longer and more robust historical data provide insight into long-term trends that can provide information about groundwater conditions through varying climatic periods such as droughts and wet periods. Historical data may also show changes in groundwater conditions through anthropogenic effects as well. While some sites chosen may not have extensive historical data, they may still be selected because there are no wells nearby with longer records.
3. **Increased Density in Heavily Pumped Areas** – Selection of additional wells in heavily pumped areas such as in the central portion of the Basin and other agriculturally intensive areas will provide additional data where the most groundwater change occurs.
4. **Increased Density near Areas of Geologic, Hydrologic, or Topologic Uncertainty** – Having a greater density of representative wells in areas of uncertainty, such as around faults or large elevation gradients may provide insightful information about groundwater dynamics to improve management practices and strategies.
5. **Wells with Multiple Depths** – The utilization of wells with different screen intervals is important to collect data on the groundwater conditions at different elevations within the aquifer. This can be achieved by using wells with different screen depths that are close to one another, or by using multi-completion wells.
6. **Consistency with BMPs** – Using published Best Management Practices (BMPs) provided by DWR will ensure consistency across all basins and ensure compliance with established regulations.
7. **Adequate Well Construction Information** – Well information such as perforation depths, construction date, and well depth should be considered and encouraged when considering wells to be included.
8. **Professional Judgement** – Professional judgement is used to make the final decision about each well, particularly when more than one suitable well exists in an area of interest.
9. **Maximum Coverage** – Any monitoring network well that was suitable for use in the representative network was used to maximize spatial and vertical density of monitoring.

4.5.6 Groundwater Level Monitoring Network

The Groundwater Level Monitoring Network is comprised of 88 of wells within the Basin. Forty-nine of those wells are representative wells. Overall well density is 23.3 wells per 100 square miles. Figure 4-18 shows the locations of the groundwater level monitoring network monitoring wells and representative wells.

Table 4-17 includes the wells in the Groundwater Level Monitoring Network. Representative wells, those with sufficient data and representative trends within the Basin, are identified with the asterisk (*) next to the OPTI ID and are sorted first. Metadata for the wells is also included.

The proposed monitoring frequency is monthly for the first three years of GSP implementation with an option to reduce to quarterly monitoring if the CBGSA Board decides that it is appropriate. This monitoring frequency captures short term, seasonal, and long-term trends in groundwater levels. The well density of 23.3 wells per 100 square miles in the monitoring network provides a spatial density that adequately covers the primary aquifer in the Basin, and is useful for determining flow directions and hydraulic gradients as well as change in storage calculations for use in future water budgeting efforts in portions of the basin with significant land use.

OPTI ID	Data Maintaining Entity as of 2018	Well Construction Date	Well Depth (ft.)	Hole Depth (ft.)	Screen Interval	Well Elevation (ft. above MSL)	Reference Point Elevation (ft. above MSL)	First Measurement Year	Last Measurement Year	Measurement Period (yrs)	Measurement Count
2*	County of Ventura		73.0			3720		2011	2017	6	17
62*	SBCWA		212			2921		1966	2018	52	65
72*	SBCWA	1/1/1980	790	820	350 - 340 ft.	2171		1981	2018	37	114
74*	SBCWA					2193		2008	2018	10	45
77*	SBCWA	12/4/2008	980	1003.5	980 - 960 ft.	2286		2009	2018	9	47
84	SBCWA		200			2923		2008	2018	10	28
85*	SBCWA		233			3047		1950	2018	68	282
89*	VWPD	1/1/1965	125			3461		1965	2017	52	68
91*	SBCWA	9/29/2009	980	1000	980 - 960 ft.	2474		2009	2018	9	47
93*	SBCWA	10/18/1967	151	165		2928		1971	2018	47	36
95*	SBCWA	4/9/2009	805.	825.		2449		2009	2018	9	32
96*	SBCWA	2/1/1980	500			2606		1983	2018	35	61
98*	SBCWA		750.			2688		2008	2018	10	32
99*	SBCWA	9/10/2009	750	906	750 - 730 ft.	2513		2009	2018	9	43
100*	SBCWA	11/1/1988	284.	302.		3004		2010	2018	8	28
101*	SBCWA		200	220		2741		2008	2018	10	42
102*	SBCWA					2046		2010	2018	8	22
103*	SBCWA	7/23/2010	1030.	1040.		2289		2012	2018	6	25
104	Unknown		640		638.64 - 478.64 ft.	2299	2301	2008	2017	9	32
105	SLOCFCWC		750			2374	2375	1990	2017	27	38
106*	Unknown		227.5			2327	2327	2016	2018	2	9
107*	Unknown	1/1/1950	200			2482		1950	2018	68	12
108*	Private Landowner		328.75			2629	2630	2016	2018	2	8
110	Unknown	1/1/1948	603			2046		1950	2018	68	17
112*	Unknown		441			2139		1966	2018	52	10
114*	DWR	1/1/1947	58.0			1925		1967	2017	50	9
115	Private Landowner		1200			2276	2278	2016	2018	2	4
116	Private Landowner	10/1/1980	700		700 - 240 ft.	2329	2329	1980	2018	38	6
117*	Private Landowner		212			2098	2095	2016	2018	2	10
118*	Private Landowner		500			2270	2271	2016	2018	2	11
119	DWR		92.0			1713		1955	2017	62	10
120	Private Landowner		15.4			1705	1707	2016	2017	1	2
121	Private Landowner		98.25			1984	1985	2016	2018	2	16
122	Private Landowner		63.2			2129	2131	2016	2018	2	16
123*	Private Landowner		138			2165	2167	2016	2018	2	14
124*	Private Landowner		160.55			2287	2288	1988	2018	30	22
125	Private Landowner		26			2283	2284	2016	2018	2	9
127*	Private Landowner		100.25			2364	2365	2016	2018	2	14

OPTI ID	Data Maintaining Entity as of 2018	Well Construction Date	Well Depth (ft.)	Hole Depth (ft.)	Screen Interval	Well Elevation (ft. above MSL)	Reference Point Elevation (ft. above MSL)	First Measurement Year	Last Measurement Year	Measurement Period (yrs)	Measurement Count
128	Unknown	3/15/1990	140.	150.		3721		2014	2017	3	8
316*	Unknown	9/29/2009	830	1000		2474		2009	2018	9	27
317*	Unknown	9/29/2009	700	1000		2474		2009	2018	9	28
322*	Unknown	4/9/2009	850	906		2513		2009	2018	9	27
324*	Unknown	9/10/2009	560	906		2513		2009	2018	9	26
325*	Unknown	9/10/2009	380	906		2513		2009	2018	9	26
420*	Unknown	12/4/2008	780	1003.5		2286		2009	2018	9	29
421*	Unknown	12/4/2008	620	1003.5		2286		2009	2018	9	29
422*	Unknown	12/4/2008	460	1003.5		2286		2009	2018	9	28
467	Unknown	1/1/1963	1140.	1215.		2224					
474*	Unknown		213			2369		1955	2017	62	6
564	Unknown	1/1/1920				2172		2017	2017	0	1
566	Unknown		500	520		2263					
568*	Unknown	1/1/1948	188	188		1905		1967	2018	51	22
571*	Private Landowner	1/1/1951	280			2307		2016	2018	3	14
573*	Unknown		404			2084		1950	2018	68	12
584	Unknown		450	606		1753		2018	2018	0	1
586	Unknown		620	622		1761					
587	Unknown	12/29/2014	900	960		1713		2018	2018	0	1
591	Unknown		720	740		1715		2017	2018	1	2
597	Unknown		390	670		1694		2017	2018	1	2
601	Private Landowner	6/14/1905	723		723 - 338 ft.	2074		1993	2017	24	32
602	Private Landowner	6/12/1905	725		725 - 325 ft.	2114		1992	2017	25	29
603	Private Landowner	6/15/1905	800		800 - 398 ft.	2097		1994	2017	23	33
604*	Private Landowner		924		924 - 454 ft.	2125		1995	2017	22	28
608*	Private Landowner	6/10/1905	745		745 - 440 ft.	2224		1995	2017	22	26
609*	Private Landowner	6/15/1905	970		970 - 476 ft.	2167		1995	2017	22	31
610*	Private Landowner		780		780 - 428 ft.	2442		1995	2017	22	27
612*	Private Landowner		1070		1070 - 657 ft.	2266		1995	2017	22	24
613*	Private Landowner		830		830 - 330 ft.	2330		1995	2017	22	24
614	Private Landowner		745		745 - 405 ft.	2337		1995	2017	22	25
615*	Private Landowner		865		865 - 480 ft.	2327		1995	2017	22	22
618	Private Landowner	6/18/1905	927		927 - 496 ft.	2163		1996	2017	21	31
619	Private Landowner	6/19/1905	1040		1040 - 569 ft.	2307		1997	2017	20	28
620*	Private Landowner	6/19/1905	1035		1035 - 550 ft.	2432		1997	2017	20	25
621	Private Landowner	6/19/1905	974		974 - 540 ft.	2126		1998	2017	19	30
623	Private Landowner	6/21/1905	1040		1040 - 530 ft.	2288		1999	2017	18	29
627	Private Landowner	6/23/1905	960		960 - 460 ft.	2279		2001	2017	16	19
628	Private Landowner	5/31/1905	941		941 - 593 ft.	2388		1978	2017	39	32

OPTI ID	Data Maintaining Entity as of 2018	Well Construction Date	Well Depth (ft.)	Hole Depth (ft.)	Screen Interval	Well Elevation (ft. above MSL)	Reference Point Elevation (ft. above MSL)	First Measurement Year	Last Measurement Year	Measurement Period (yrs)	Measurement Count
629*	Private Landowner		1000		1000 - 500 ft.	2379		2005	2017	12	13
630	Private Landowner		900		900 - 360 ft.	2371		1991	2017	26	22
631	Private Landowner	5/31/1905	960		960 - 600 ft.	2367		1986	2017	31	22
633*	Private Landowner		1000		1000 - 500 ft.	2364		1998	2017	19	23
635	Private Landowner		1050		1050 - 549 ft.	2356		2003	2017	14	10
636	Private Landowner	5/27/1905	924		924 - 474 ft.	2348		1975	2017	42	15
637	Private Landowner	6/30/1905	980		980 - 540 ft.	2110		2009	2017	8	10
638	Private Landowner	6/30/1905	1006		1006 - 526 ft.	2437		2008	2017	9	9
640	Private Landowner	6/30/1905	840		840 - 400 ft.	2239		2008	2017	9	16
641	Private Landowner	7/2/1905	800		800 - 360 ft.	2204		2010	2017	7	7
642	Private Landowner	7/2/1905	1000		1000 - 550 ft.	2232		2010	2017	7	8
644	Private Landowner	7/5/1905	950		950 - 490 ft.	2143		2013	2017	4	10

Table 4-17: Wells included in the Groundwater Levels and Storage Monitoring Network

Figure_Exported_1/16/2019 8:16:20 AM C:\Users\scott\OneDrive - Woodard & Curran\PCF\Projects\011079-003 - Cuyama01 - Local\Cuyama_GIS_20180808\MXD\Text\Monitoring_Network\Fig-17_GW_Level\Storagel\Monitoring_NetworkWells.mxd


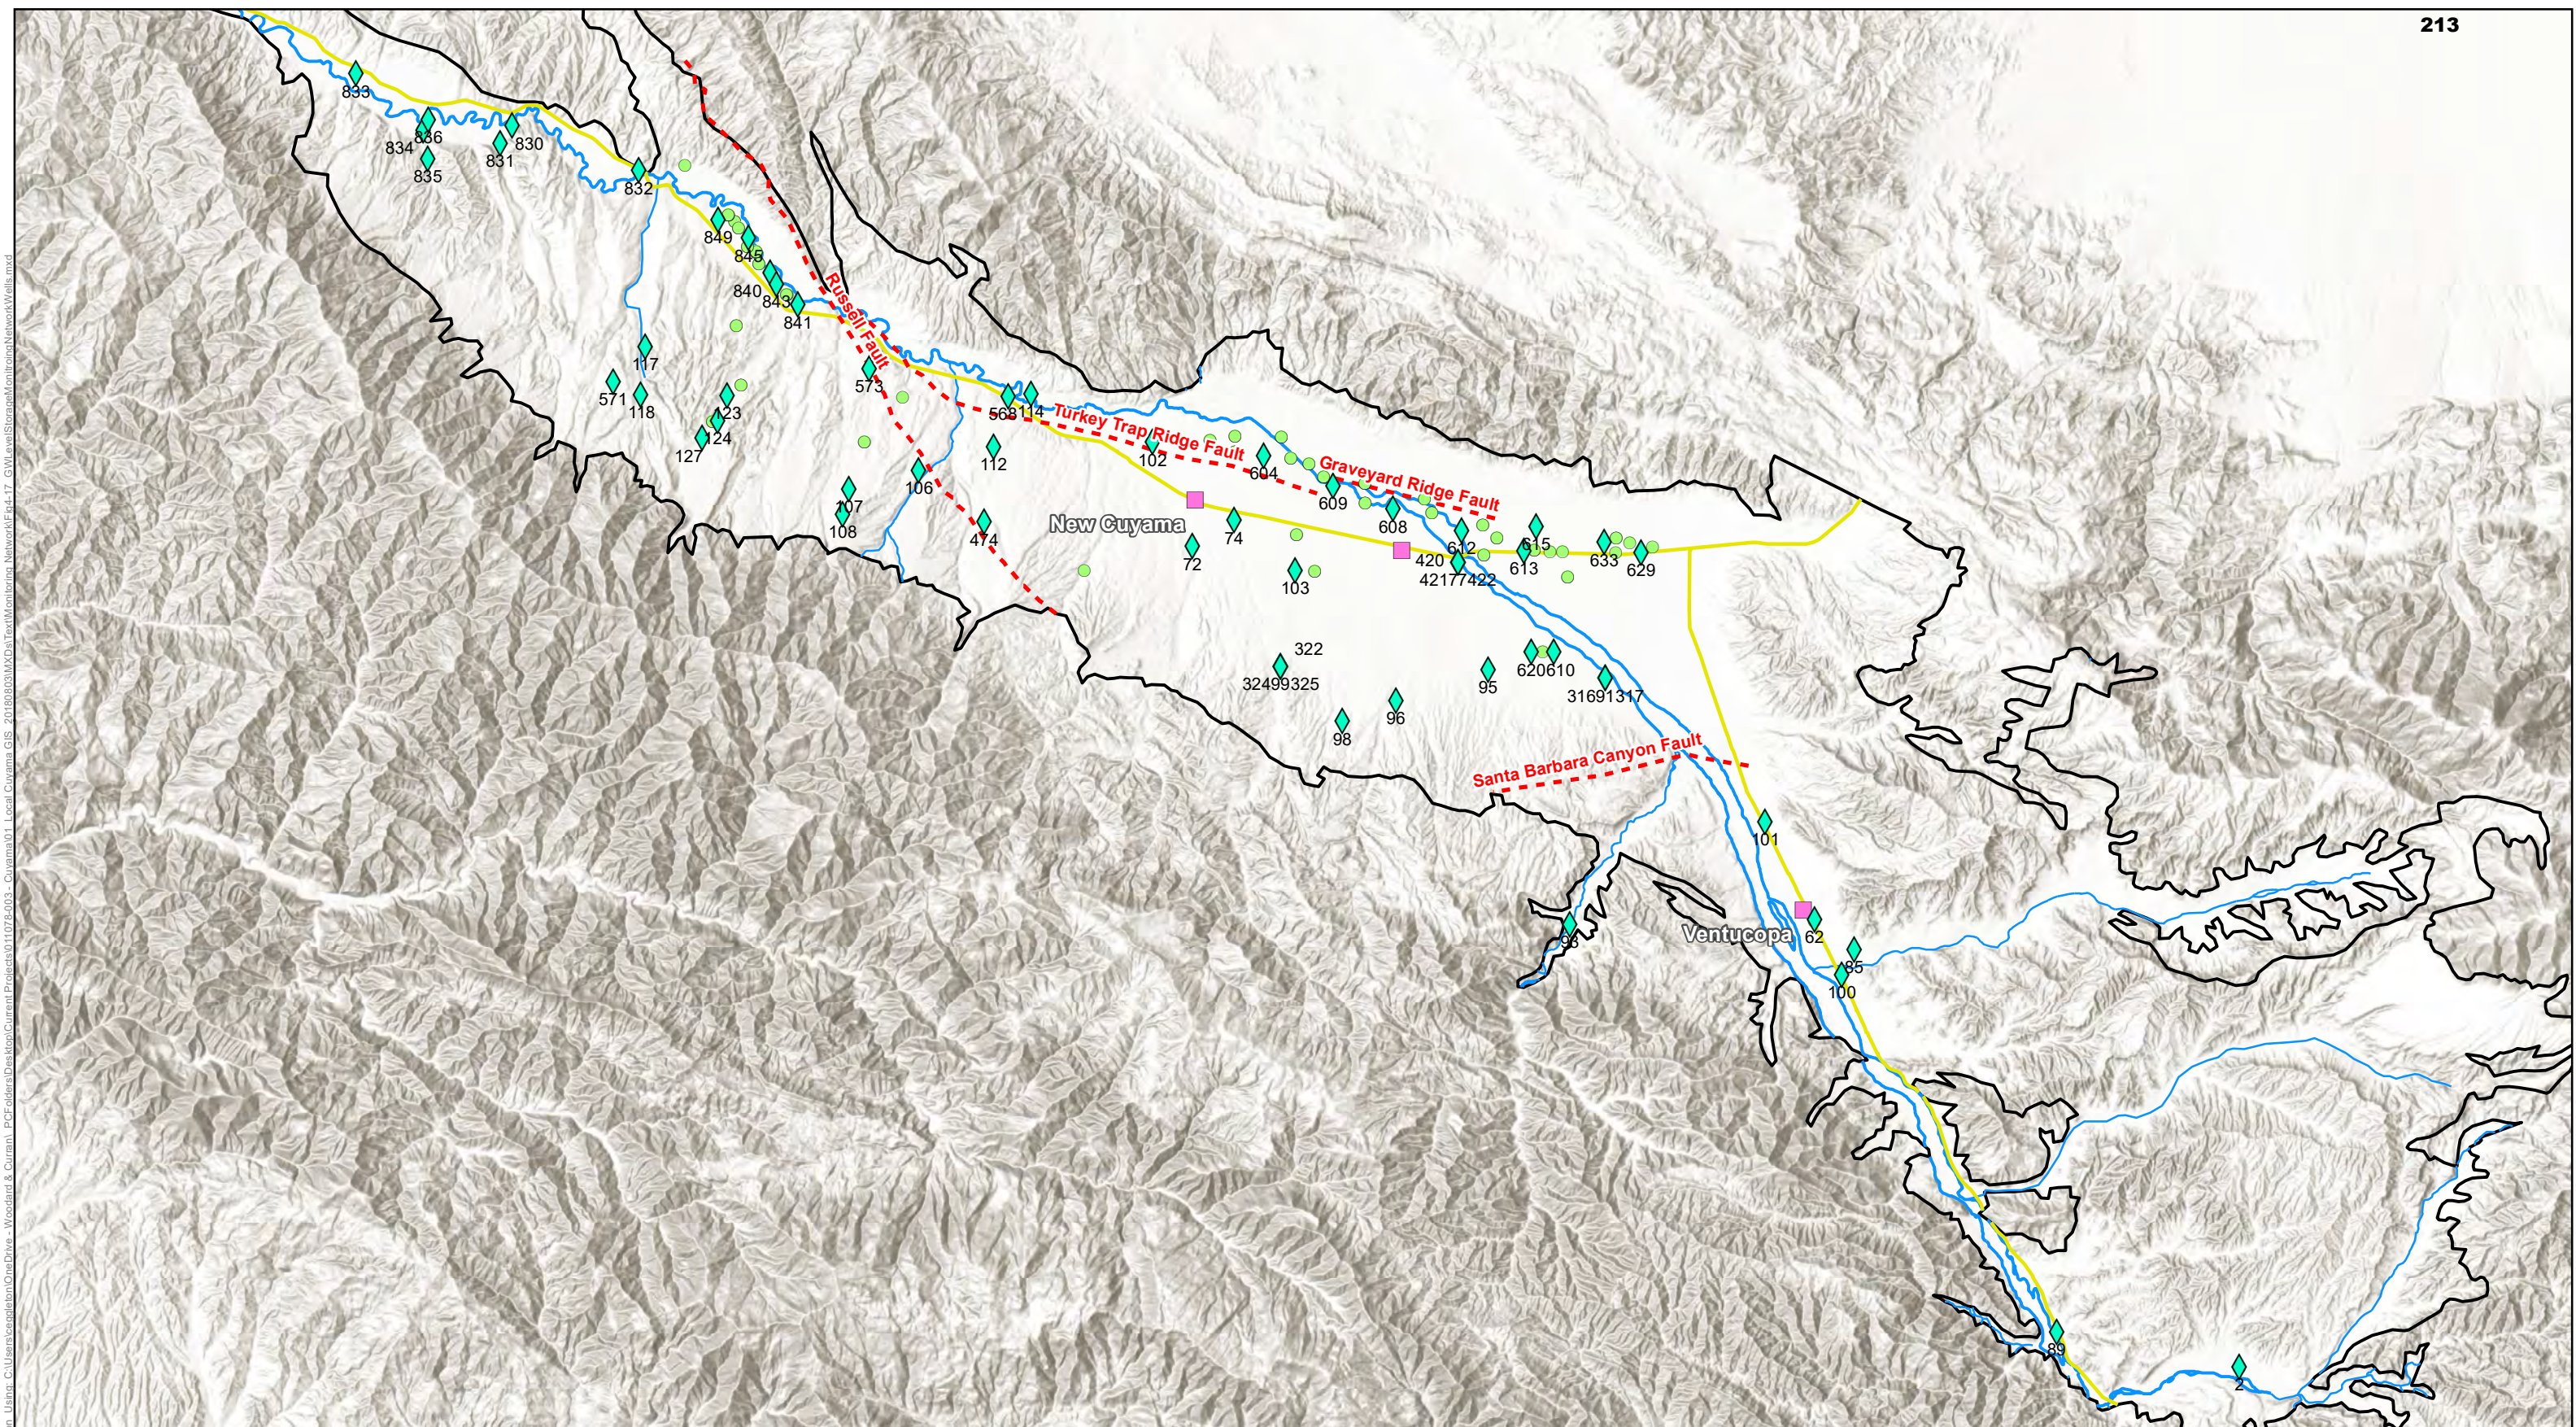


Figure 4-18: Cuyama GW Basin Groundwater Level & Storage Monitoring Network Wells
 Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 January 2019



Legend

- Cuyama Basin
- Faults
- Highways
- Cuyama River
- Streams
- Towns
- ◆ Representative Wells
- Monitoring Network Wells



4.5.7 Monitoring Protocols

Monitoring protocols for the groundwater level monitoring network are included in Appendix K.

4.5.8 Data Gaps

Groundwater levels monitoring data gaps result from poor spatial distribution of available wells and a lack of well construction information.

The spatial distribution of the groundwater levels monitoring network provides coverage of the majority of the Basin. However, there are several areas, identified by the red ovals in Figure 4-19, that do not have adequate monitoring. Additional monitoring wells added in these areas would provide more information that can be used to detect changes in conditions in the basin.

Well construction information is not available for many wells within the Basin. Monitoring wells with construction information featuring total depth and screened interval are preferred, because that information is useful in understanding what monitoring measurements mean in terms of basin conditions at different depths.

4.5.9 Plan to fill data gaps

This GSP identifies a number of activities to increase the robustness of the groundwater level monitoring network.

The CBGSA has been awarded a Proposition 1 Category 1 Grant, which includes a task to expand the groundwater level monitoring network. This task includes identification of additional monitoring wells for hand measurements as well as installation of continuous monitoring equipment into ten existing wells, which can be used to augment the existing monitoring network. This task will both increase the spatial coverage of the monitoring network and the temporal coverage in the wells with additional continuous monitoring.

The Cuyama Basin GSA has applied for assistance from DWR's Technical Support Services (TSS), which provides support GSAs as they develop GSPs. Opportunities within the TSS include the installation of new monitoring wells and downhole video logging. New wells drilled by DWR's TSS will improve the density and sampling frequency for level monitoring within the Basin. Downhole video logging will provide more well construction information to better utilize well data within the Basin. As of this writing, the DWR TSS program has not provided any TSS services for the Cuyama Basin.

Figure_Exported_9/18/2018_8:20:18_Bv_cceq12018_Using_C:\Users\scapleton\OneDrive - Woodard & Curran\PCF\Projects\Desktop\11078-003 - Cuyama01 - Local Cuyama GIS - 20180803\MapDocs\Text\Monitoring_Network\DataGaps.mxd

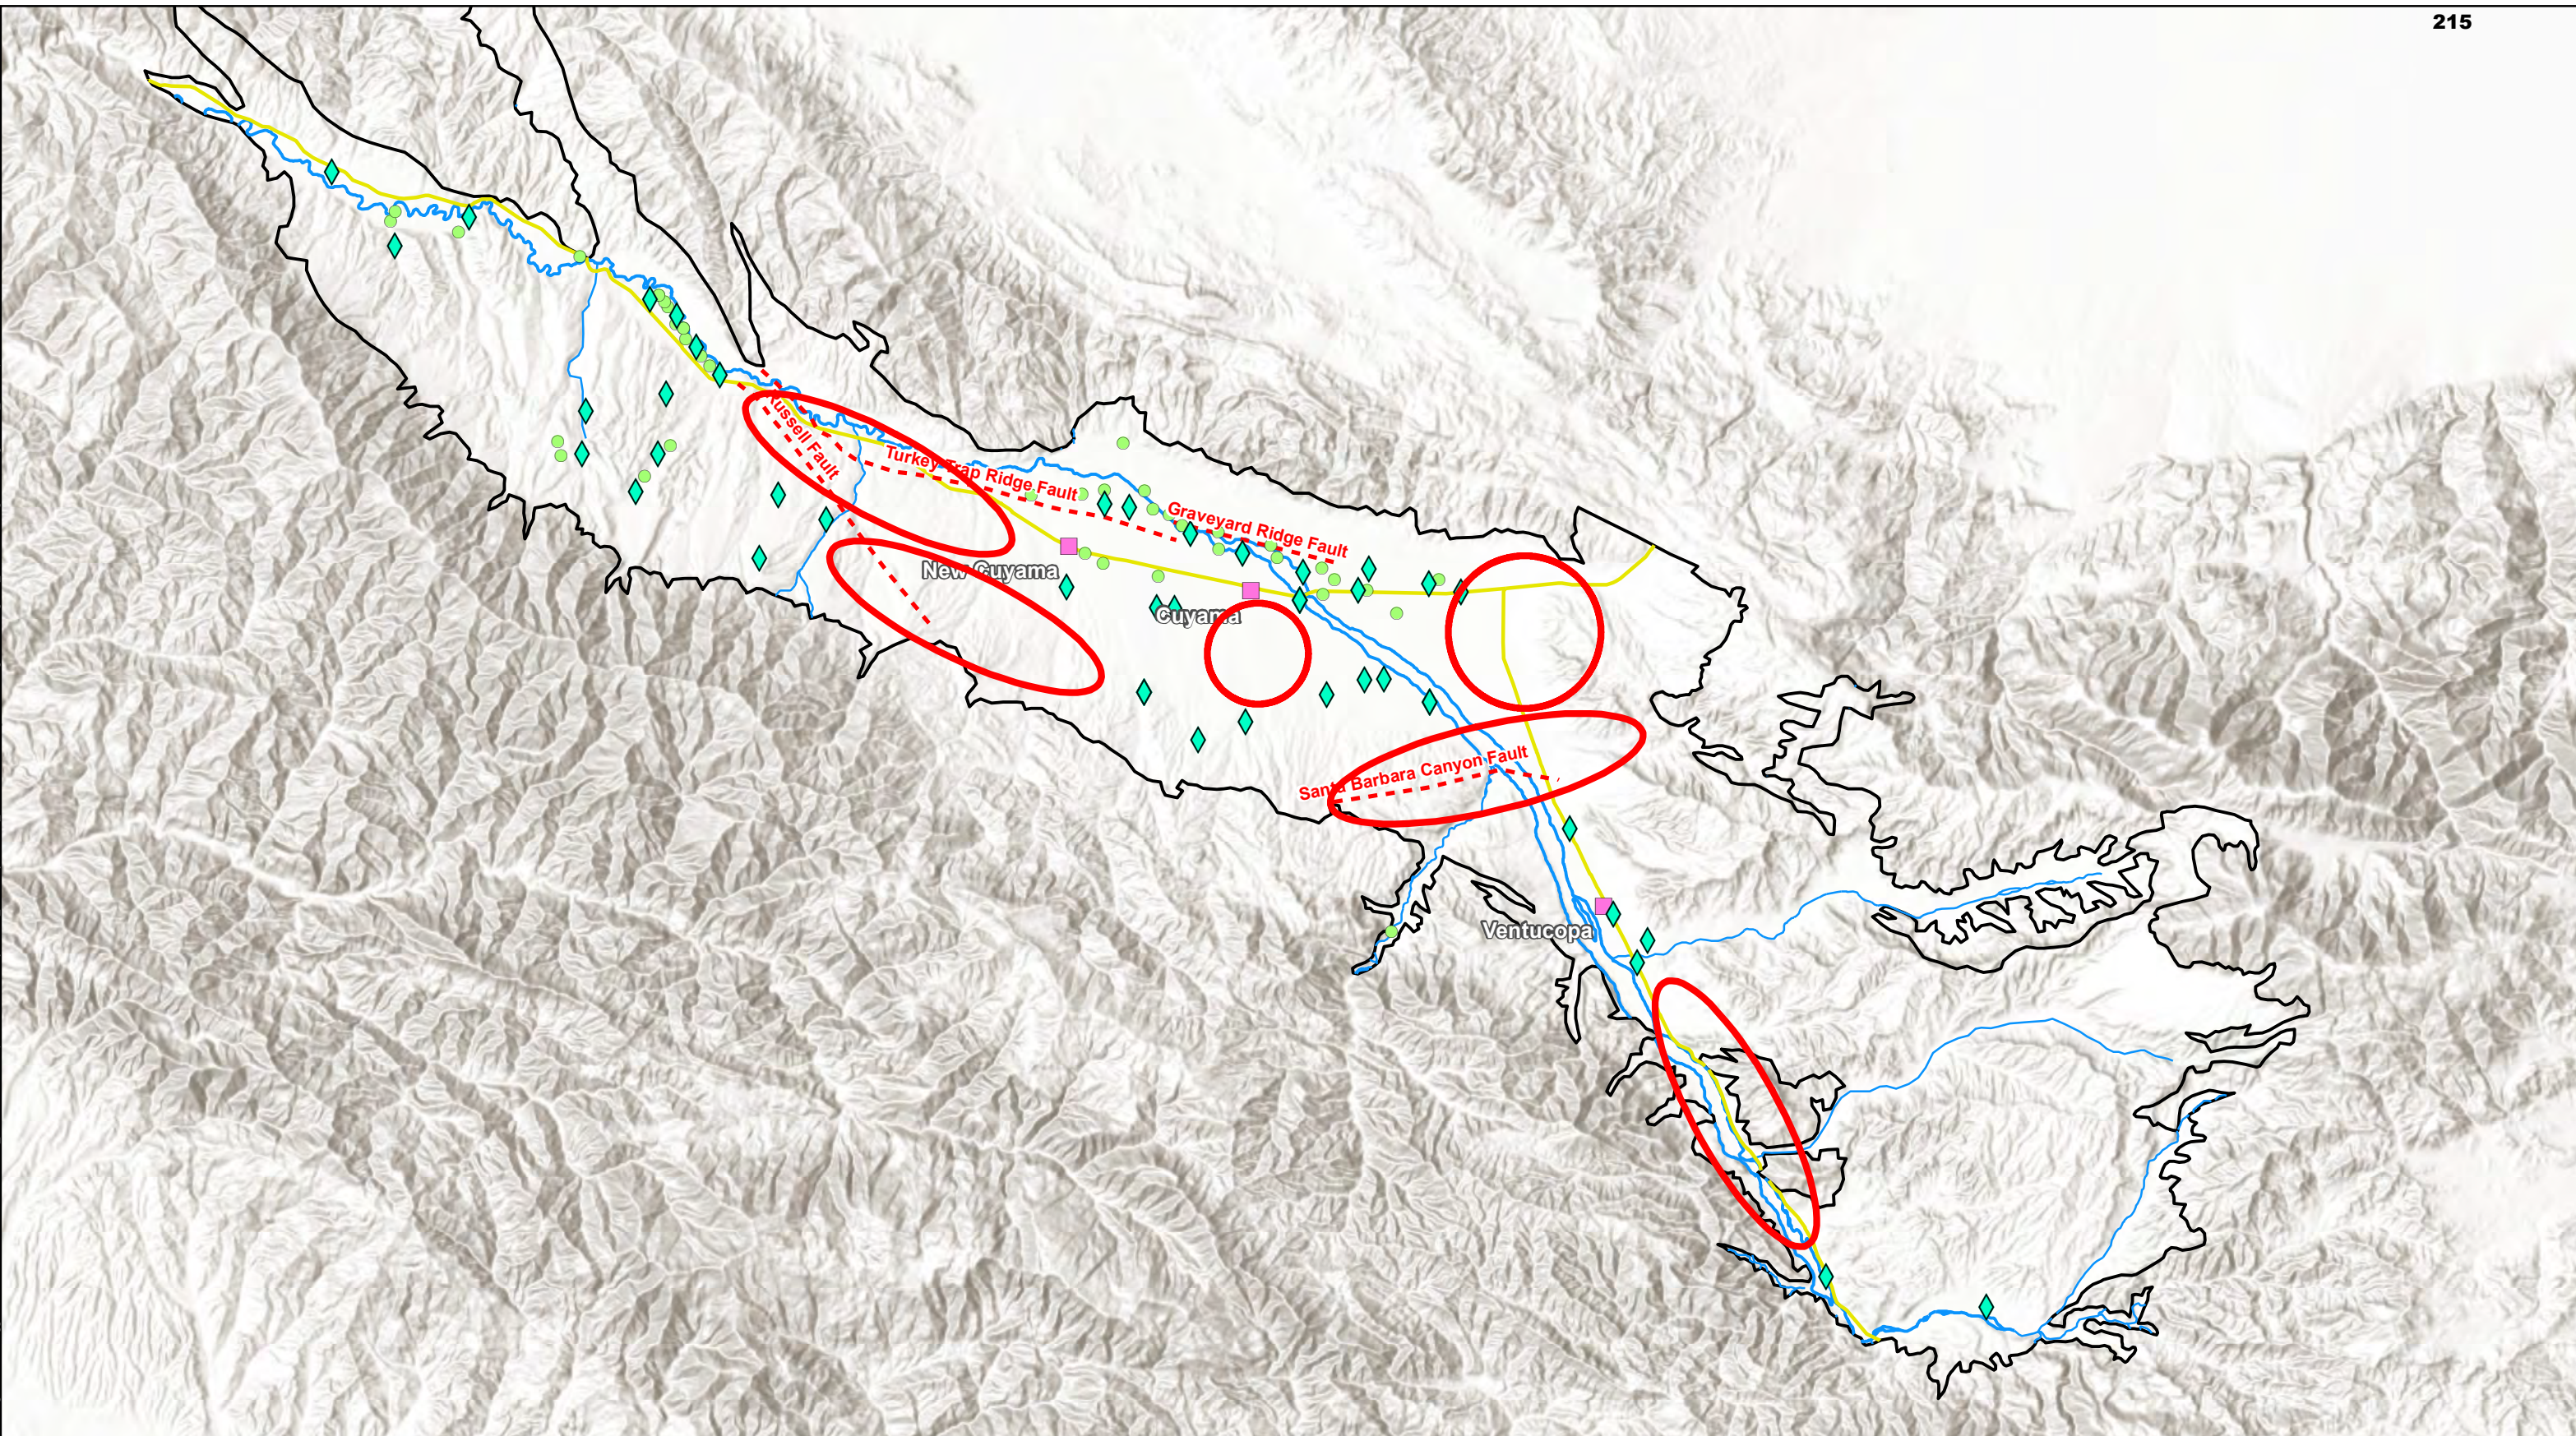



Figure 4-19: Cuyama GW Basin Groundwater Level & Storage Monitoring Network Data Gaps
 Cuyama Basin Groundwater Sustainability Agency
 Cuyama Valley Groundwater Basin Groundwater Sustainability Plan
 September 2018



Legend

- Cuyama Basin
- Cuyama River
- Streams
- Towns
- Faults
- Highways

- Monitoring Network Wells**
- ◆ Representative Wells
 - Monitoring Network Wells



4.6 Groundwater Storage Monitoring Network

Groundwater in storage is monitored through the measurement of groundwater levels. Therefore, the groundwater storage monitoring network will use the groundwater level monitoring network. Thresholds for groundwater storage will be discussed in Section 5.

4.7 Seawater Intrusion Monitoring Network

The Cuyama Groundwater Basin is geographically and geologically isolated from the Pacific Ocean and any other large source of saline water. Thus, the Basin is not at risk for seawater intrusion. Salinity is monitored as part of the groundwater quality network, but seawater intrusion is not a concern for the Basin.

4.8 Degraded Groundwater Quality Monitoring Network

Salinity (measured as TDS), arsenic, and nitrates have all been identified by local stakeholders as potentially being of concern for water quality in the Basin. However, as noted in the Groundwater Conditions section, there have only been two nitrate measurements and fewer than ten arsenic measurements in recent years that exceeded MCLs. In the case of arsenic, the high concentration measurements have been taken either at CCSD Well #2 (which is no longer in operation) or at groundwater depths of greater than 700 feet, outside of the range of pumping for drinking water. Furthermore, unlike with salinity, there is no evidence to suggest a causal nexus between potential actions under the GSA's authority and arsenic or salinity. Therefore, the groundwater quality network has been established to monitor for salinity but does not include arsenic or nitrates at this time.

4.8.1 Management Areas

Management Areas have not been selected at the time of writing this GSP section. Management Areas allow flexibility in establishing monitoring networks both spatially and temporally to match conditions and use in the management area. At this time, it is recommended due to the sparsity of monitored sites to use the same monitoring network selection criteria across all management areas in the basin.

4.8.2 Monitoring Sites Selected for Monitoring Network

Table 4-17 lists the monitoring sites selected for the groundwater quality monitoring network by monitoring group. Monitoring sites selected for inclusion into the network were monitored within the years of 2008-2018. Many additional monitoring sites have been monitored for salinity, however, they were not monitored in the last 10 years, indicating that they are unlikely to be monitored again by that monitoring agency. Note that due to duplication of wells being in both USGS and DWR's networks, the total number of selected groundwater quality networks wells (64) is less than the sum of wells shown in Table 4-18.

Monitoring Data Maintaining Entity	Number of Wells Selected for Monitoring Network
NWQC, USGS, ILRP	43
GAMA, DWR	20
BCWPD	7
Private Landowner	11
Total	64

Note: Total does not equal sum of rows due to duplicate entries in multiple databases

Table 4-18: Groundwater Quality Monitoring Sites by Source

4.8.3 Monitoring Frequency

The Basin, in coordination with partnering agencies, will compile salinity samples once a year,.

Monitoring agencies such as the USGS and DWR were contacted to inquire about when they would next monitor their sites for groundwater quality, including salinity. The agencies communicated that they ‘usually’ monitor annually, but the timing of that monitoring is not set and changes from year to year. Additionally, depending on funding and staff availability, there may be years where no groundwater quality monitoring is conducted by an agency.

Although DWR does not provide specific recommendations on the frequency of monitoring in relationship to aforementioned groundwater characteristics, however, concentrations of groundwater quality, especially salinity, do not fluctuate significantly throughout a year to require multiple samples per year.

4.8.4 Spatial Density

DWR’s *Monitoring Networks and Identification of Data Gaps BMP* states “The spatial distribution must be adequate to map or supplement mapping of known contaminants.” Using this guidance, professional judgement was used to identify representative wells within each management area. Heavily pumped areas, such as the central portion of the Basin, require additional monitoring sites, while areas of lower pumping or less agricultural or municipal groundwater use need less monitoring.

Any well measured from 2008 to June 2018 was included in the Monitoring Network. The entire Monitoring Network was selected as representative monitoring. The selected groundwater quality representative and monitoring wells provide adequate coverage of the Basin’s aquifer. The groundwater quality monitoring network is composed of 64 of wells within the Basin. Providing a monitoring site density of 17 sites per 100 square miles. This significantly exceeds the density recommended by reference materials for groundwater level density shown in Table 4-16.

4.8.5 Representative Monitoring

Representative monitoring sites were selected for groundwater quality using the considerations used to select representative groundwater level monitoring wells (Section 4.5.5). Due to the uncertainty of the monitoring frequency, all monitoring network wells were selected to be representative wells in the Groundwater Quality Monitoring Network.

4.8.6 Groundwater Quality Monitoring Network

Figure 4-20 shows the groundwater quality monitoring network and representative and monitoring sites. The Groundwater Quality Monitoring Network is comprised of 64 wells within the Basin, all of which are representative wells.

Table 4-19 shows the wells in the groundwater quality monitoring network. Metadata for the wells is also included.

OPTI ID	Managing Agency as of 2018	Well Construction Date	Well Depth	Hole Depth	Screen Interval	Well Elevation	First Measurement Date	Last Measurement Date	Measurement Period (years)	Measurement Count
61*	Department of Water Resources		357.		Unknown	3681	2008-09-25	2008-09-25	0	3
72*	Santa Barbara County Water Agency	1/1/1980	790	820	340 to 350 ft.	2171	2008-09-15	2017-07-14	9	13
73*	Santa Barbara County Water Agency	8/26/1982	880.	1021.	Unknown	2252	2010-08-03	2011-07-12	1	2
74*	Santa Barbara County Water Agency				Unknown	2193	2008-09-17	2017-07-13	9	11
76*	USGS	9/1/1960	720		Unknown	2277	1960-09-22	2008-09-17	48	10
77*	Santa Barbara County Water Agency	12/4/2008	980	1003.5	960 to 980 ft.	2286	2009-04-08	2009-04-08	0	1
79*	USGS		600	750	Unknown	2374	2008-07-08	2011-08-11	3	7
81*	USGS		155.		Unknown	2698	2011-08-16	2011-08-16	0	1
83*	Santa Barbara County Water Agency	1/1/1972	198.		Unknown	2858	2011-08-16	2011-08-16	0	1
85*	Santa Barbara County Water Agency		233		Unknown	3047	1964-02-07	2011-07-12	47	46
86*	USGS	1/1/1995	230.		Unknown	3141				0
87*	USGS		232.		Unknown	3546				0
88*	USGS	9/4/2007	400	400.	Unknown	3549	2011-08-18	2011-08-18	0	1
90*	Santa Barbara County Water Agency	8/8/2006	800	800	Unknown	2552	2008-09-17	2012-09-20	4	6
91*	Santa Barbara County Water Agency	9/29/2009	980	1000	960 to 980 ft.	2474	2009-11-05	2009-11-05	0	1
94*	USGS		550	720	Unknown	2456	2008-07-29	2010-07-29	2	6
95*	Santa Barbara County Water Agency	4/9/2009	805.	825.	Unknown	2449	2011-08-19	2011-08-19	0	1
96*	Santa Barbara County Water Agency	2/1/1980	500		Unknown	2606	2011-08-19	2011-08-19	0	1
98*	Santa Barbara County Water Agency		750.		Unknown	2688	2011-08-16	2011-08-16	0	1
99*	Santa Barbara County Water Agency	9/10/2009	750	906	730 to 750 ft.	2513	2009-11-04	2009-11-04	0	1
101*	Santa Barbara County Water Agency		200	220	Unknown	2741	2008-09-25	2008-09-25	0	3
102*	Santa Barbara County Water Agency				Unknown	2046	2011-08-15	2017-07-13	6	7
130*	USGS				Unknown	3536	2011-08-19	2011-08-19	0	1
131*	USGS				Unknown	2990	2011-08-17	2011-08-17	0	1
157*	USGS		71.0		Unknown	3755				0
196*	USGS		741	755	Unknown	3117				
204*	USGS	1/1/1935			Unknown	3693	2011-08-18	2011-08-18	0	1
226*	USGS	1/1/1971		220.	Unknown	2945	2011-08-18	2011-08-18	0	1
227*	USGS				Unknown	3002	1966-07-01	2011-08-17	45	2
242*	USGS		155	187	Unknown	2933	2012-07-18	2012-07-18	0	1
269*	USGS	1/1/1951			Unknown	2756	2008-09-16	2008-09-16	0	3
309*	USGS	2/2/1980	1100	1100	Unknown	2513	2011-08-11	2011-08-11	0	1
316*	USGS	9/29/2009	830	1000	Unknown	2474	2009-11-05	2009-11-05	0	1
317*	USGS	9/29/2009	700	1000	Unknown	2474	2009-11-05	2009-11-05	0	1
318*	USGS	9/29/2009	610	1000	Unknown	2474	2009-11-04	2009-11-04	0	1
322*	USGS	4/9/2009	850	906	Unknown	2513	2009-11-03	2009-11-03	0	1
324*	USGS	9/10/2009	560	906	Unknown	2513	2009-11-04	2009-11-04	0	1
325*	USGS	9/10/2009	380	906	Unknown	2513	2009-11-04	2009-11-04	0	1
400*	USGS		2120.	2200.	Unknown	2298	1958-05-26	2011-08-15	53	8
420*	USGS	12/4/2008	780	1003.5	Unknown	2286	2009-04-07	2009-04-07	0	1
421*	USGS	12/4/2008	620	1003.5	Unknown	2286	2009-04-07	2009-04-07	0	1
422*	USGS	12/4/2008	460	1003.5	Unknown	2286	2009-04-08	2009-04-08	0	1
424*	USGS		1000.	1020.	Unknown	2291	2011-08-15	2011-08-15	0	1
467*	USGS	1/1/1963	1140.	1215.	Unknown	2224	2012-07-18	2017-07-13	5	6
568*	USGS	1/1/1948	188	188	Unknown	1905	2008-09-15	2008-09-15	0	3

OPTI ID	Managing Agency as of 2018	Well Construction Date	Well Depth	Hole Depth	Screen Interval	Well Elevation	First Measurement Date	Last Measurement Date	Measurement Period (years)	Measurement Count
702*	USGS				Unknown	3539				
703*	USGS				Unknown	1613				
710*	DWR				Unknown	2942				
711*	DWR				Unknown	1905				
712*	DWR				Unknown	2171				
713*	DWR				Unknown	2456				
721*	DWR				Unknown	2374				
758*	DWR				Unknown	3537				
840*	Private Landowner	11/21/2014	900		200 to 880 ft.	1713				
841*	Private Landowner	12/12/2014	600		170 to 580 ft.	1761				
842*	Private Landowner	12/19/2014	450		60 to 430 ft.	1759				
843*	Private Landowner	1/5/2015	620		60 to 600 ft.	1761				
844*	Private Landowner	7/17/2015	730		100 to 720 ft.	1713				
845*	Private Landowner	7/12/2015	380		100 to 360 ft.	1712				
846*	Private Landowner	6/15/2015	610		130 to 590 ft.	1715				
847*	Private Landowner	7/26/2015	600		180 to 580 ft.	1733				
848*	Private Landowner	6/30/2015	390		110 to 370 ft.	1694				
849*	Private Landowner	6/23/2015	570		150 to 550 ft.	1713				
850*	Private Landowner	8/13/2015	790		180 to 780 ft.	1759				

Table 4-19: Wells Included in the Groundwater Quality Monitoring Network

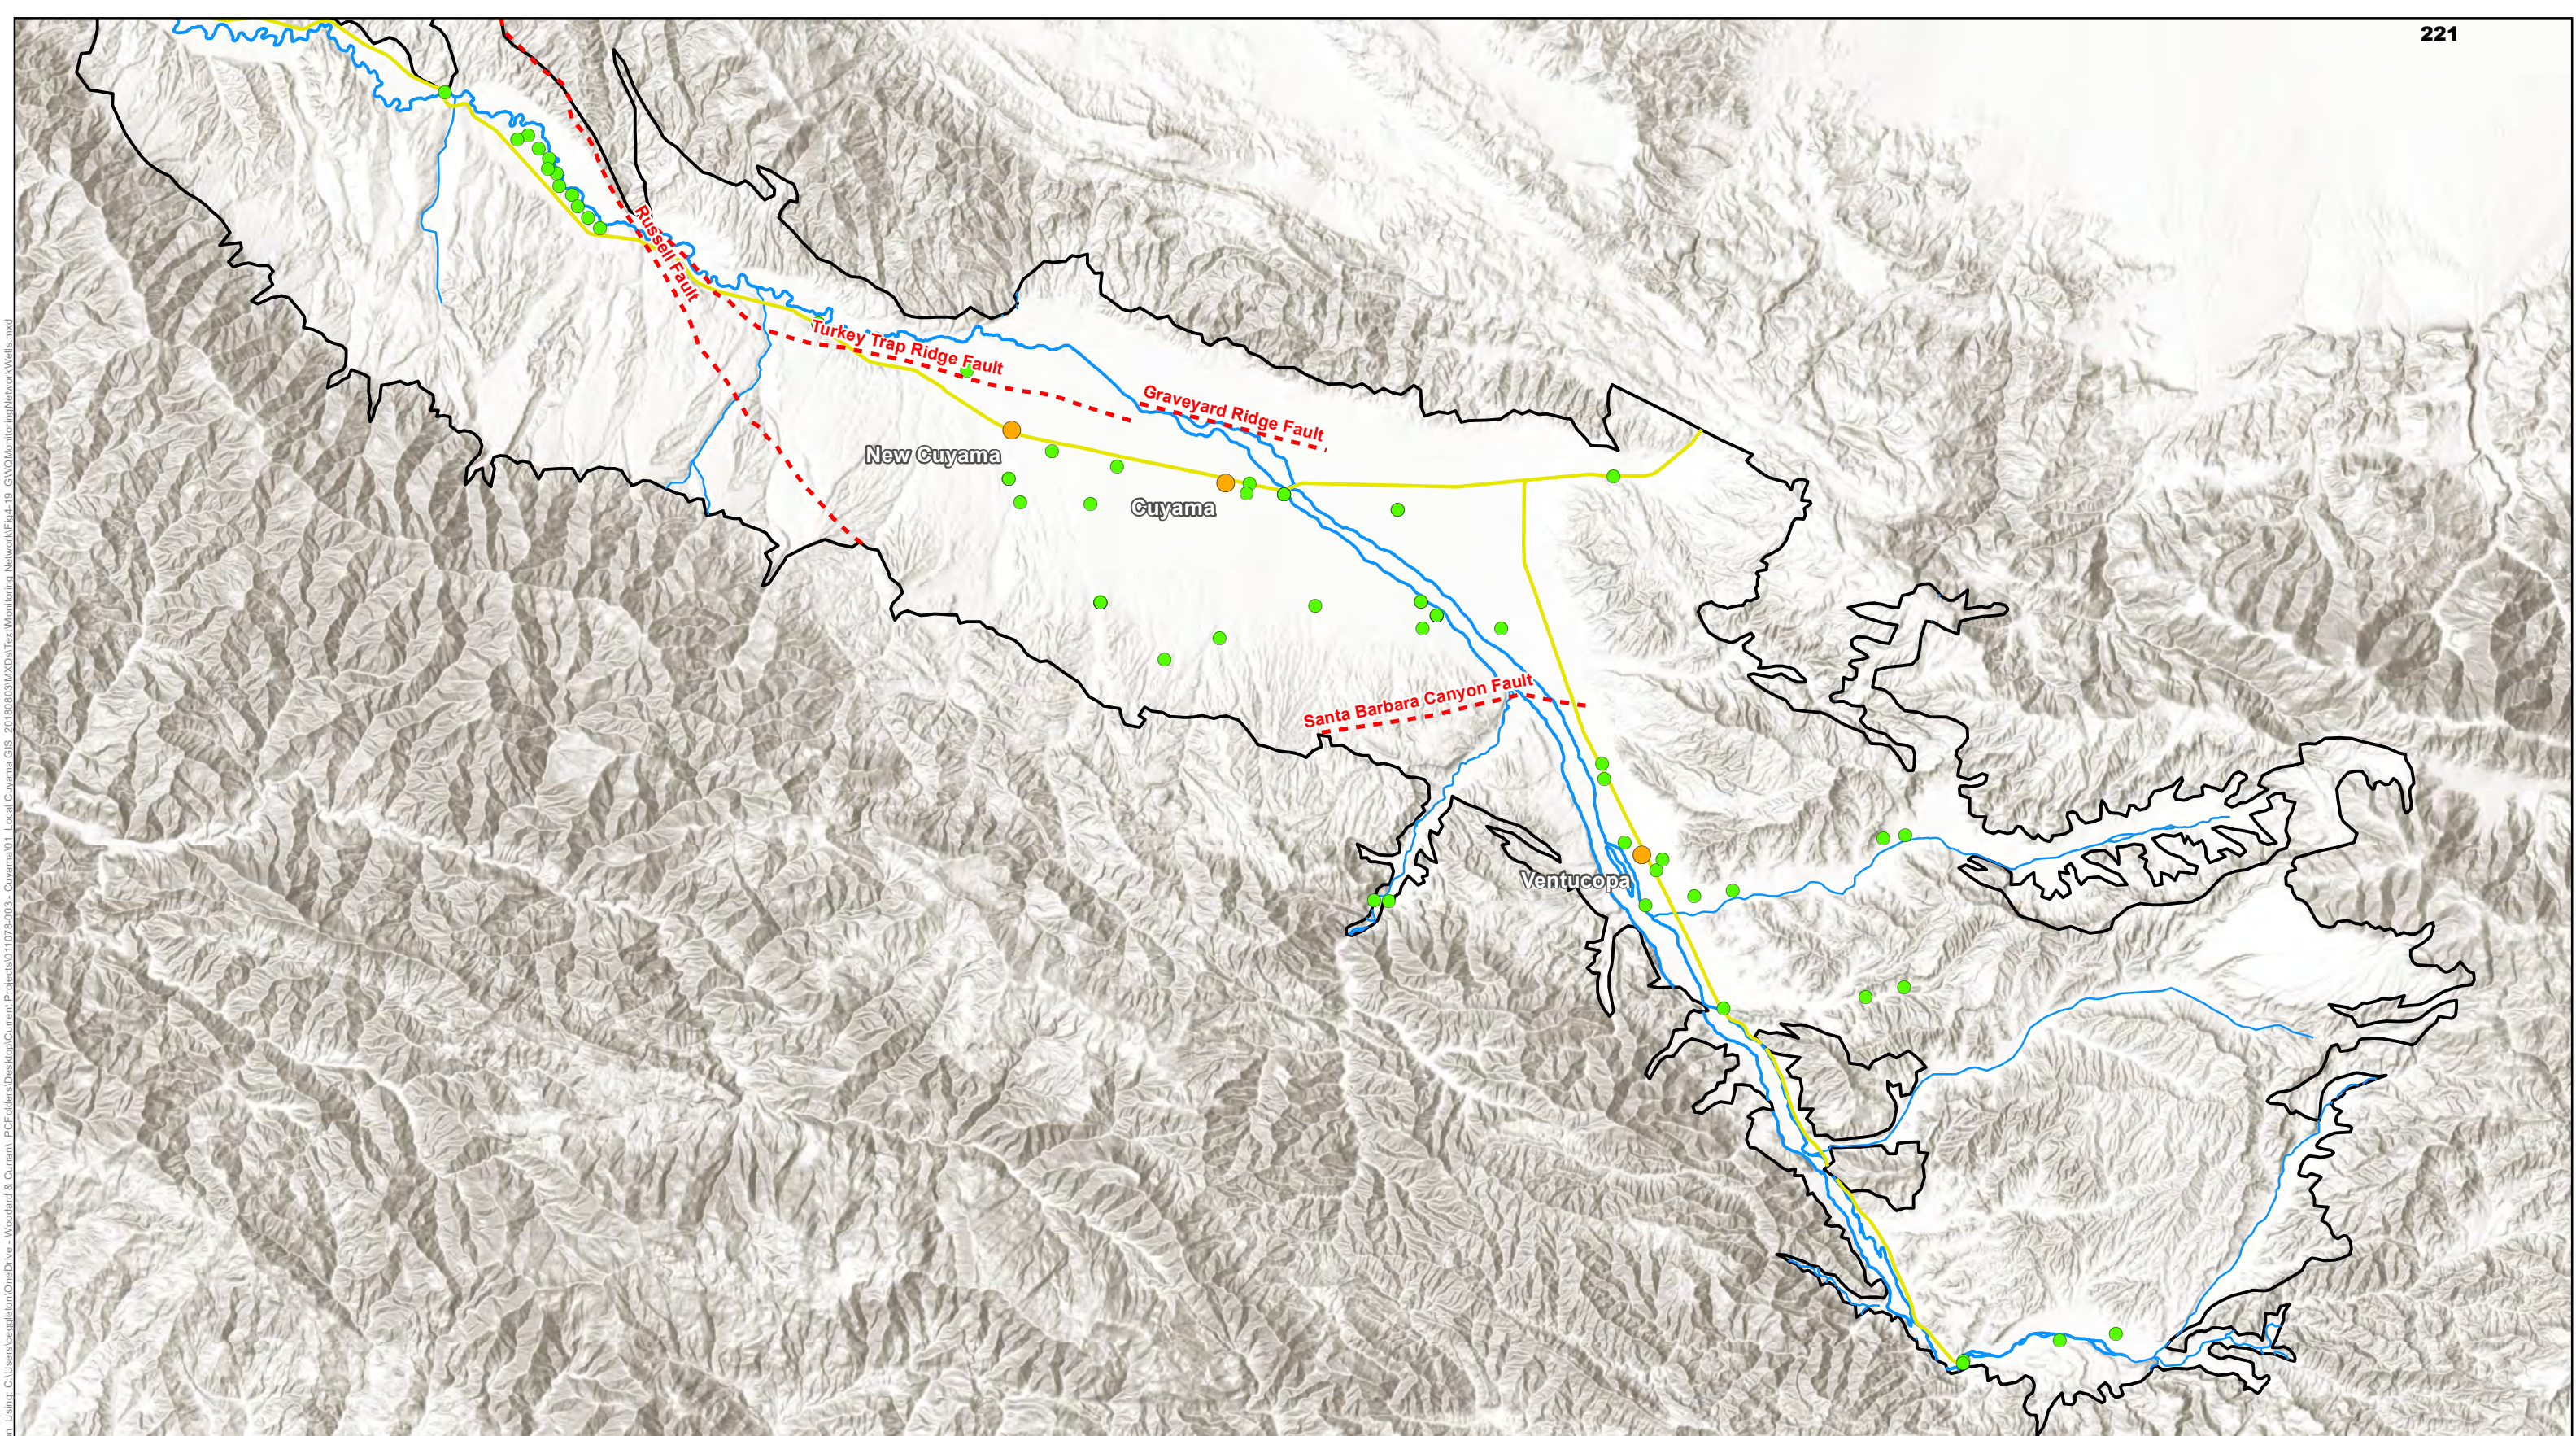


Figure 4-20: Cuyama GW Basin Groundwater Quality Monitoring Network Wells

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

January 2019



Legend

- Cuyama Basin
- Faults
- Towns
- Representative Wells and Groundwater Quality Monitoring Network Wells
- Highways
- Cuyama River
- Streams

All wells included in the Groundwater Quality Monitoring Network have been measured since 1/1/2008. Wells measured prior to 2008 are not included.



Figure Exported: 1/16/2019 10:46:00 AM Using: C:\Users\scapleton\OneDrive - Woodard & Curran\PCF\Projects\GIS\Current\Projects\011076-003 - Cuyama\01 - Local\Cuyama_GIS_20180803\MXD\Text\Monitoring_Network\Fig4-20_GWQ_Monitoring_Network_Wells.mxd

4.8.7 Monitoring Protocols

For recommended additional monitoring recommended in Section 4.8.9, the monitoring protocols will use DWR's *Monitoring Networks and Identification of Data Gaps BMP* which sites the USGS's 1995 publication *Ground-Water Data-Collection Protocols and Procedures for the National Water-Quality Assessment Program: Collection and Documentation of Water-Quality Samples and Related Data* (Appendix A) for the groundwater quality sampling protocols. This publication includes protocols for equipment selection, setup, use, field evaluation, sample collection techniques, sample handling, and sample testing, and is included in Appendix L.

4.8.8 Data Gaps

Groundwater quality monitoring data gaps have three components:

- Spatial distribution of the wells
- Well/measurement depths for three-dimensional constituent mapping
- Temporal sampling

The spatial distribution of the groundwater quality monitoring network provides coverage of several portions of the Basin. There are several areas, identified by the red ovals in Figure 4-21, that do not have adequate monitoring. Additional sampling taken within these identified areas will provide more information about salinity in the indicated locations.

Well construction of wells used in existing salinity sampling efforts is mostly unknown, and the depth of the water used for sampling is not known at most monitoring sites. Additional information about how salinity may change at different depths in the aquifer would be valuable, and requires samples from wells with construction information.

Water quality sampling is currently performed at an insufficient time interval throughout the entire Basin, and therefore the entire Basin is identified as a groundwater quality monitoring temporal data gap. Management entities within the Basin responsible for groundwater quality sampling were contacted by a GSA representative in September 2018, to understand the timing of current monitoring schedules, and whether those management entities were intending to continue quality monitoring in the future. The GSP assumes that all management entities are anticipating continuing with groundwater quality sampling within the Basin, but this will need to be confirmed, as well as the anticipated schedule of sampling by each entity.

4.8.9 Plan to fill data gaps

The CBGSA will fill the temporal and spatial data gaps by implementing its own salinity sampling program, and will fill the well construction knowledge gap at least partially by using DWR's TSS program to perform downhole logging of a subset of wells.

The CBGSA will develop and perform a project to perform annual monitoring of salinity in the basin. This new monitoring program will focus on using wells that have both construction information and pumps installed. Details of the new monitoring program, such as the targeted number and distribution of sampling sites will be detailed as a project in the projects and management actions section of this GSP (Section 6).

DWR provides Technical Support Services (TSS) to support GSAs as they develop GSPs. Downhole video logging performed by the TSS program in existing salinity monitoring wells could provide more well construction information to better utilize well data within the Basin.

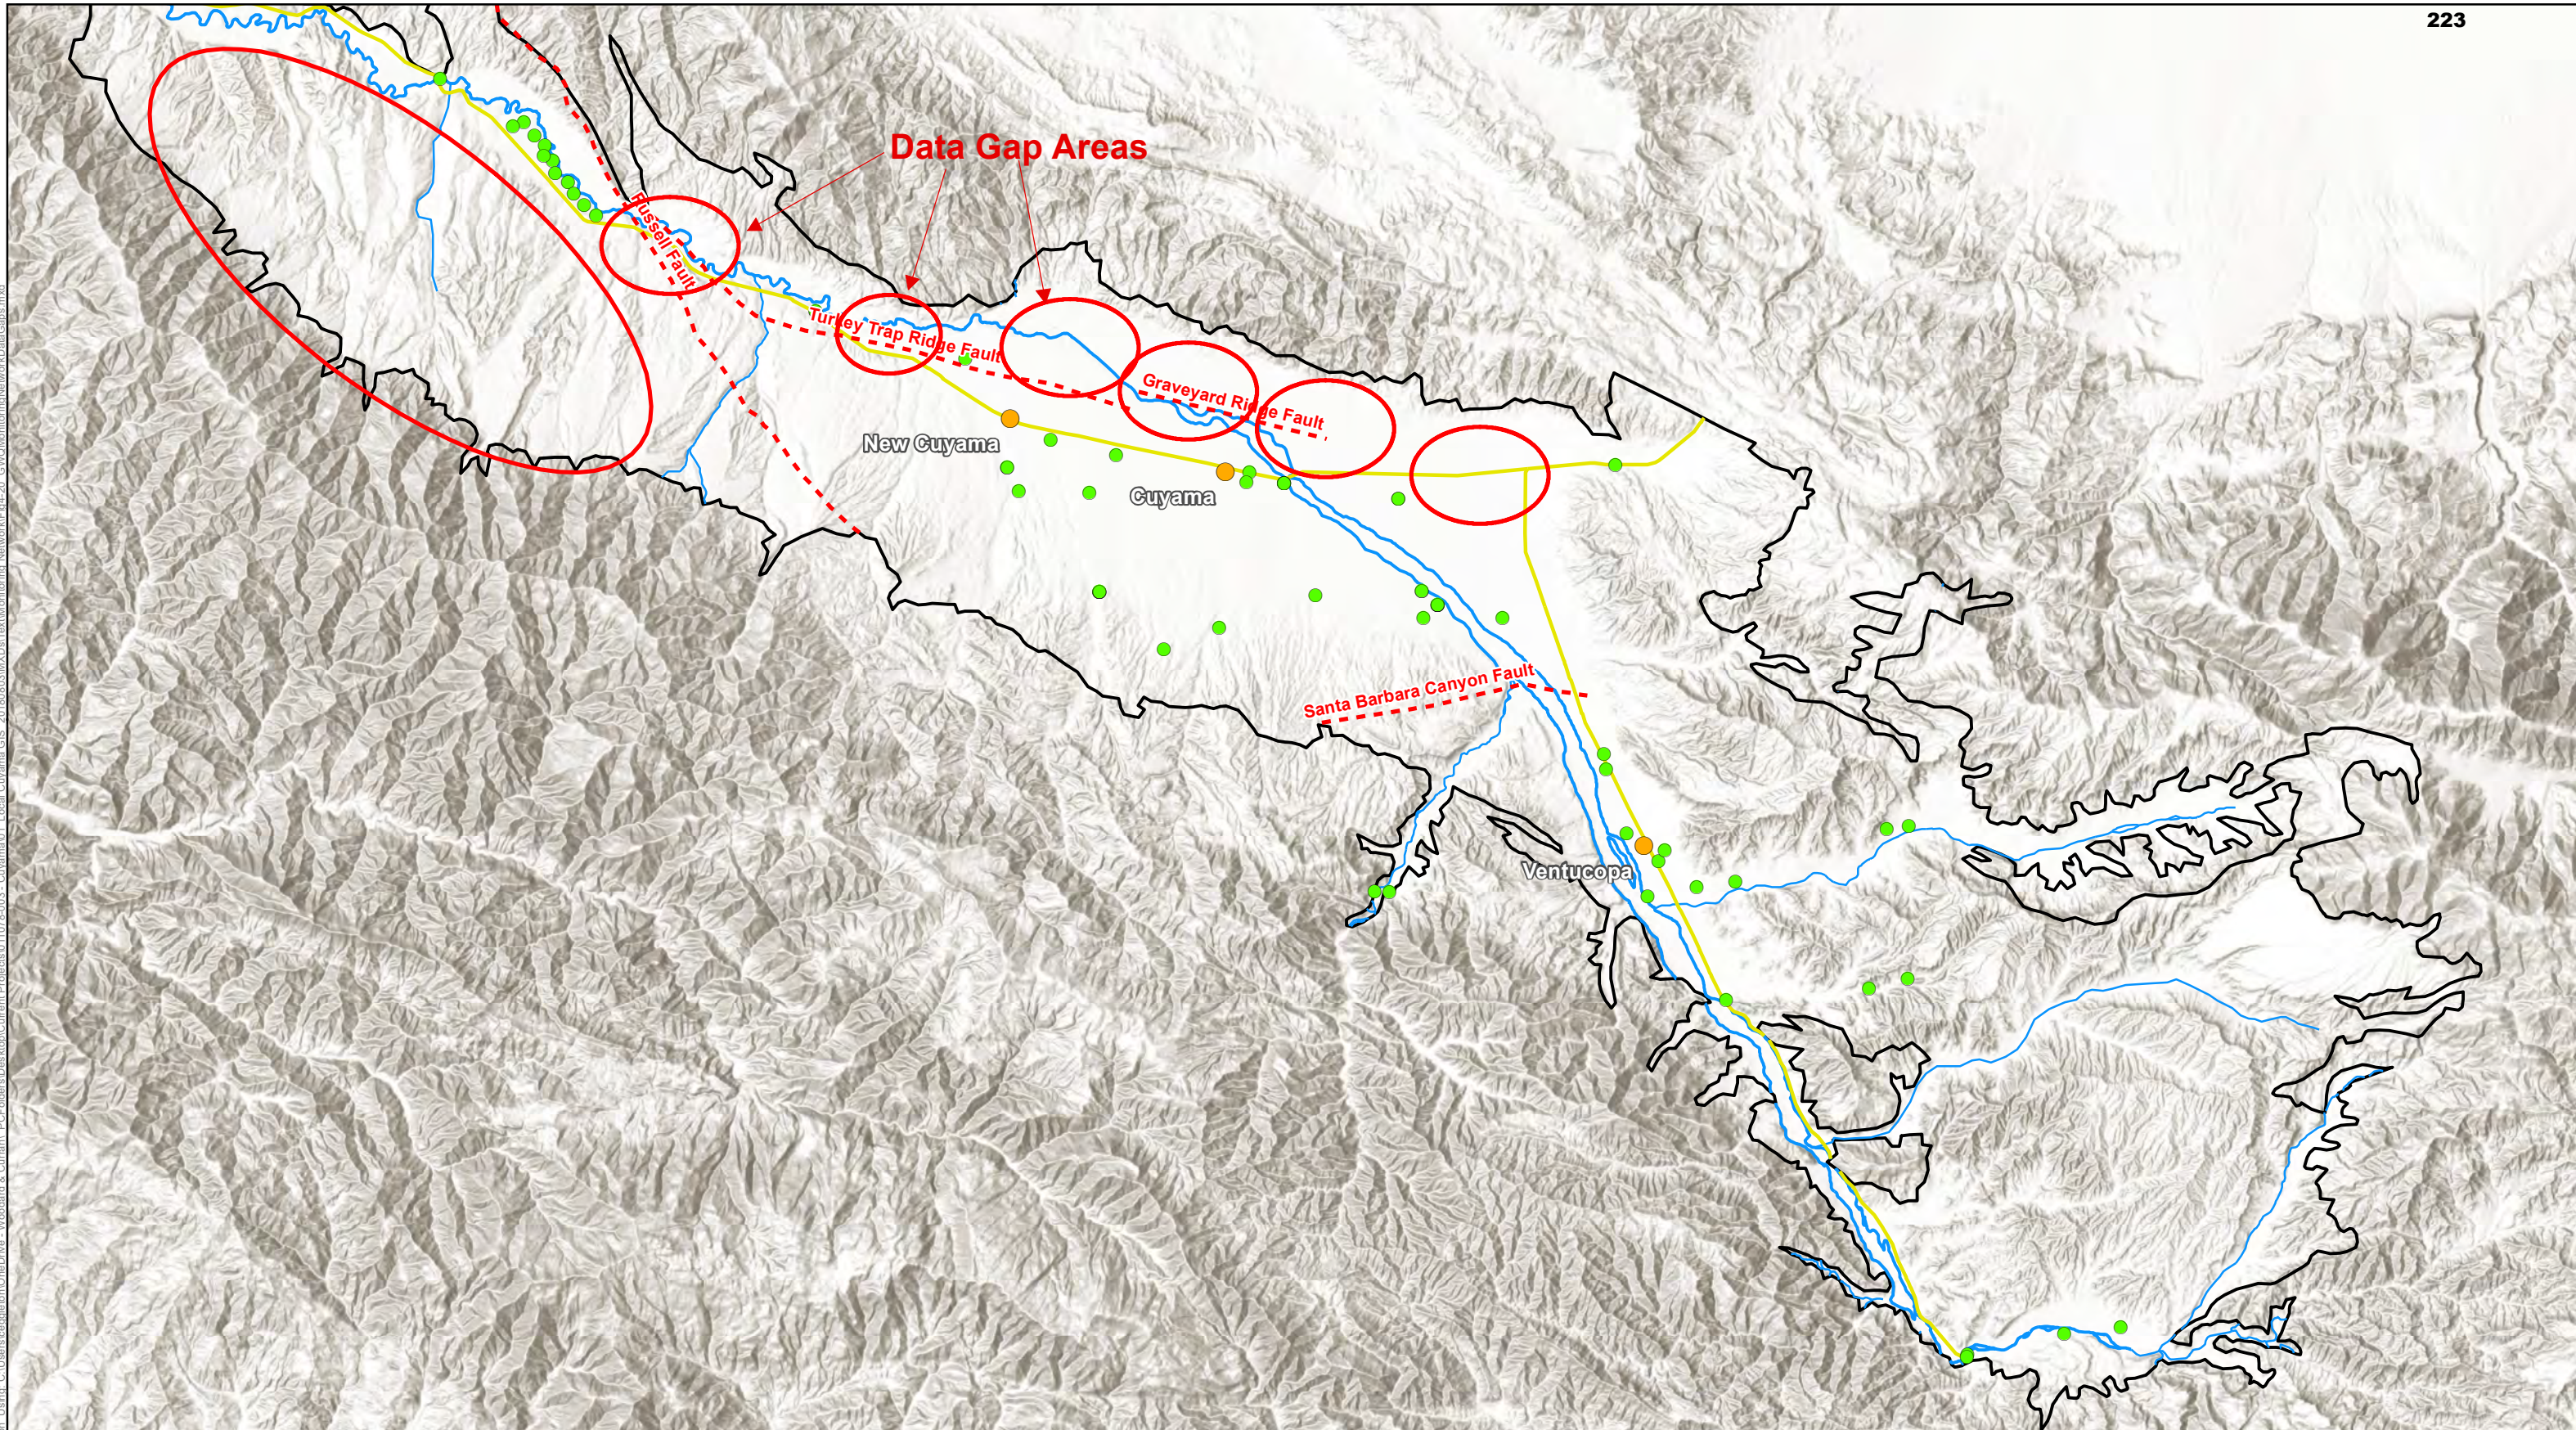


Figure 4-21: Cuyama GW Basin Groundwater Quality Monitoring Network Data Gaps

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

January 2019



Legend

- Cuyama Basin
- Faults
- Towns
- Representative Wells and Groundwater Quality Monitoring Network Wells
- Highways
- Cuyama River
- Streams



Figure Exported: 1/16/2019 8:56:00 AM Using: C:\Users\scapleton\OneDrive - Woodard & Curran\PCF\Projects\Current\Projects\011076-003 - Cuyama\01 - Local\Cuyama_GIS_20180803\MapDocs\Text\Monitoring_Network\Map4-20_GWQ_Monitoring_Network_Data_Gaps.mxd

4.9 Land Subsidence Monitoring Network

4.9.1 Management Areas

Management Areas have not been selected at the time of writing this GSP section. Management Areas allow flexibility in establishing monitoring networks both spatially and temporally to match conditions and use in the management area. At this time, it is recommended due to the sparsity of monitored sites to use the same monitoring network selection criteria across all management areas in the basin.

4.9.2 Monitoring Sites Selected for Monitoring Network

There are currently two subsidence monitoring stations within the Basin, and three outside of the Basin. Figure 4-22 shows the locations of existing subsidence monitoring stations, which make up the current subsidence monitoring network. The two stations within the Basin, Sites CUHS and VCST are both included in the monitoring network because they are active and provide Basin specific data. The three stations located outside of the Basin, Sites P521, BCWR, and OZST, are also included in the monitoring network. These stations are important to understand the general dynamic movement trends of the Basin because they detect tectonic movement in the area of the Basin.

4.9.3 Monitoring Frequency

Subsidence monitoring frequencies should capture long-term and seasonal fluctuations in ground level changes. DWR's *Monitoring Networks and Identification of Data Gaps BMP* does not provide specific monitoring frequency or interval guidance. However, CGPS stations allow for data sampling to be taken several times a minute, more than enough for seasonal fluctuations to be captured in the data. Long-term trends are easily compiled from continuous data. Therefore, the GSA will utilize the same monitoring frequency currently used by the CGPS stations.

4.9.4 Spatial Density

Because there are currently only two monitoring stations, the current spatial density of subsidence monitoring within the basin is 0.5 stations per 100 miles. These stations are included in Figure 4-22. DWR's *Monitoring Networks and Identification of Data Gaps BMP* does not provide specific spatial density guidelines for subsidence monitoring networks, and thus relies on professional judgment on site identification. Current stations, in and outside of the basin, do not adequately cover the Basin to capture subsidence variations. Potential areas for new stations are discussed further in the following sections.

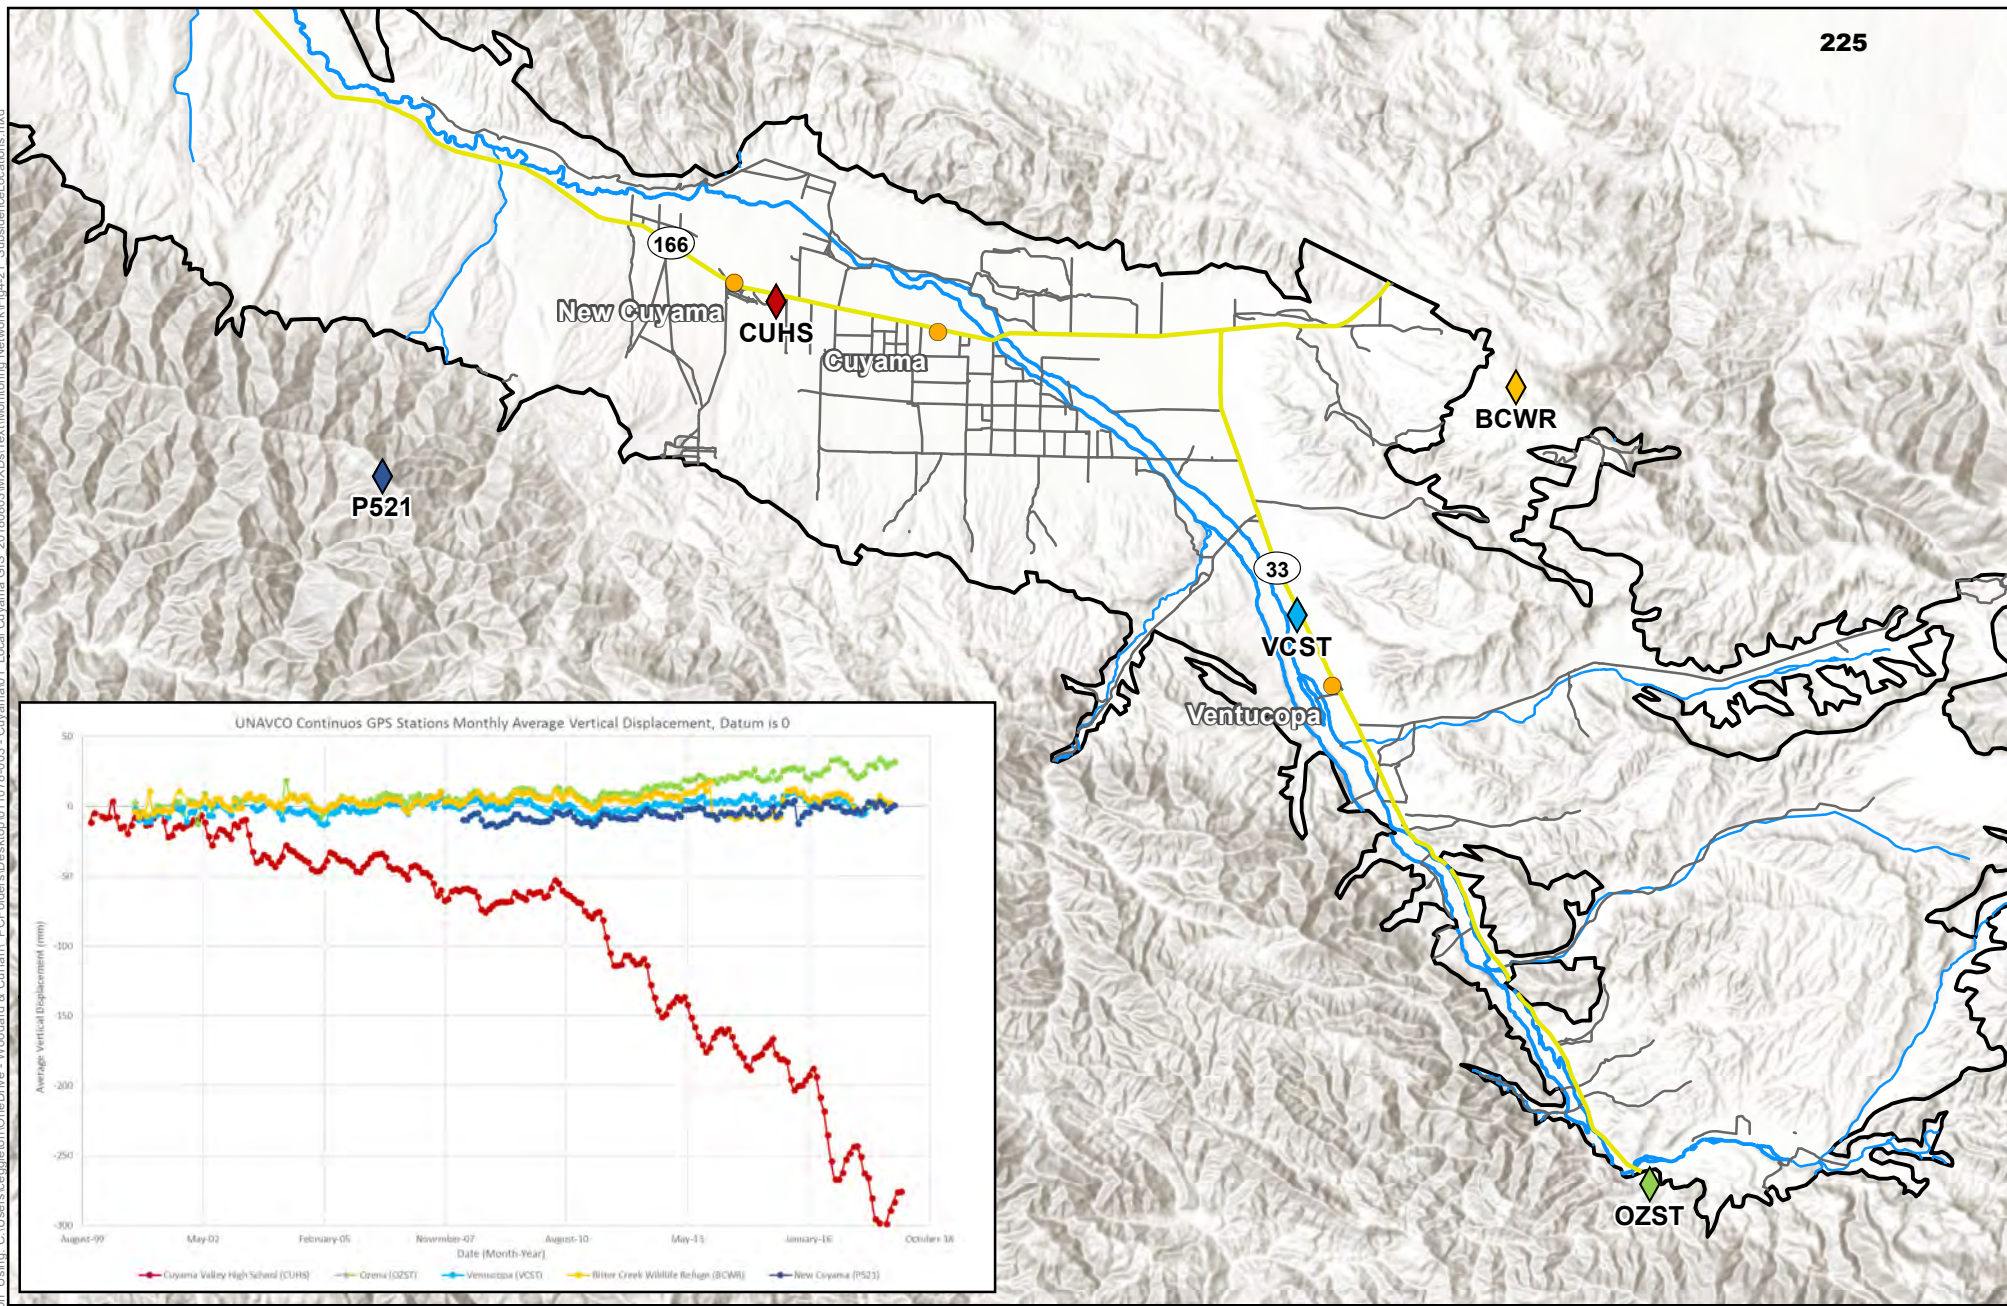


Figure 4-22: Currently Active Subsidence Monitoring Locations

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018



Legend

- Cuyama Basin
- Cuyama River
- Towns
- Streams
- Highways
- Local Roads



Figure Exported: 9/18/2018 8: By: cengle@unavco.org Using: C:\Users\cengle\OneDrive - Woodard & Curran\PCF\Folders\Desktop\110728-003 - Cuyama\01 - Local Cuyama GIS 20180803\MXD\Text\Monitoring_Network\Fig4-22 - SubsidenceLocations.mxd

4.9.5 Monitoring Protocols

DWR's provided *Monitoring Networks and Identification of Data Gaps GMP* does not provide specific monitoring protocols for subsidence monitoring networks. CGPS station measurements are logged digitally, and depending on the station and network setup, either require downloading at the physical station site or are uploaded automatically to a server. Data management will also depend on the monitoring agency. Current operating stations will continue to be managed by their current entity, and the GSA will be responsible for downloading data on a fixed schedule. The additional of new stations will require procedures for downloading and storing the data as and for providing quality assurance review of the data.

Data should be saved in the Cuyama Basin data management system on a regular annual schedule. All data should be reviewed for quality and logged appropriately.

4.9.6 Data Gaps

New subsidence monitoring sites should be chosen to provide data on areas most at risk for land subsidence. Six potential new site locations were identified within the Basin, as shown in Figure 4-23. These locations were identified by focusing on the areas with significant or new groundwater pumping that did not currently have subsidence monitoring nearby.

- A. Identified as an area with relatively new and increased agricultural activity and pumping with no nearby stations.
- B. Identified because there are currently no nearby stations and the Russell Fault bisects this area.
- C. Identified because of the CCSD and proximity to the heavily pumped central portion of the Basin.
- D. Identified because this is the most heavily pumped portion of the Basin and there are currently no nearby stations.
- E. Identified because of its proximity to the heavily pumped portion of the Basin, on the north facing slope of the valley. Additionally, there are currently no stations nearby.
- F. Identified because this is the transition into the heavily pumped central portion of the Basin near current agricultural pumping. This is also an area with faults.

4.9.7 Plan to fill data gaps

New monitoring sites should be located near areas with the greatest groundwater pumping, or where pumping is new. This is because pumping is the primary driving force for subsidence with the Basin. Although there are multiple ways to measure subsidence, CGPS stations are likely the best option for the Basin. CGPS stations are relatively low cost when compared to labor intensive land surveys, construction of borehole extensometers, and frequent satellite data processing. CGPS stations require comparatively little maintenance and provide continuous information allowing detailed land subsidence analysis.

Increasing data collection on subsidence for the Basin requires the addition of several new CGPS stations. These stations can be managed solely by the GSA or can be incorporated into CORS via coronation with USGS. Site selection, equipment, and management will require coordination with USGS

Figure_Exported_9/18/2018 8: By: cengileton Using: C:\Users\cengileton\OneDrive - Woodard & Curran\ PC\Folders\Desktop\011078-003 - Cuyama01 Local Cuyama GIS 2018\08\03\MXD\Text\Monitoring_Network\Fig4-23_SubsidenceDataGapLocations.mxd

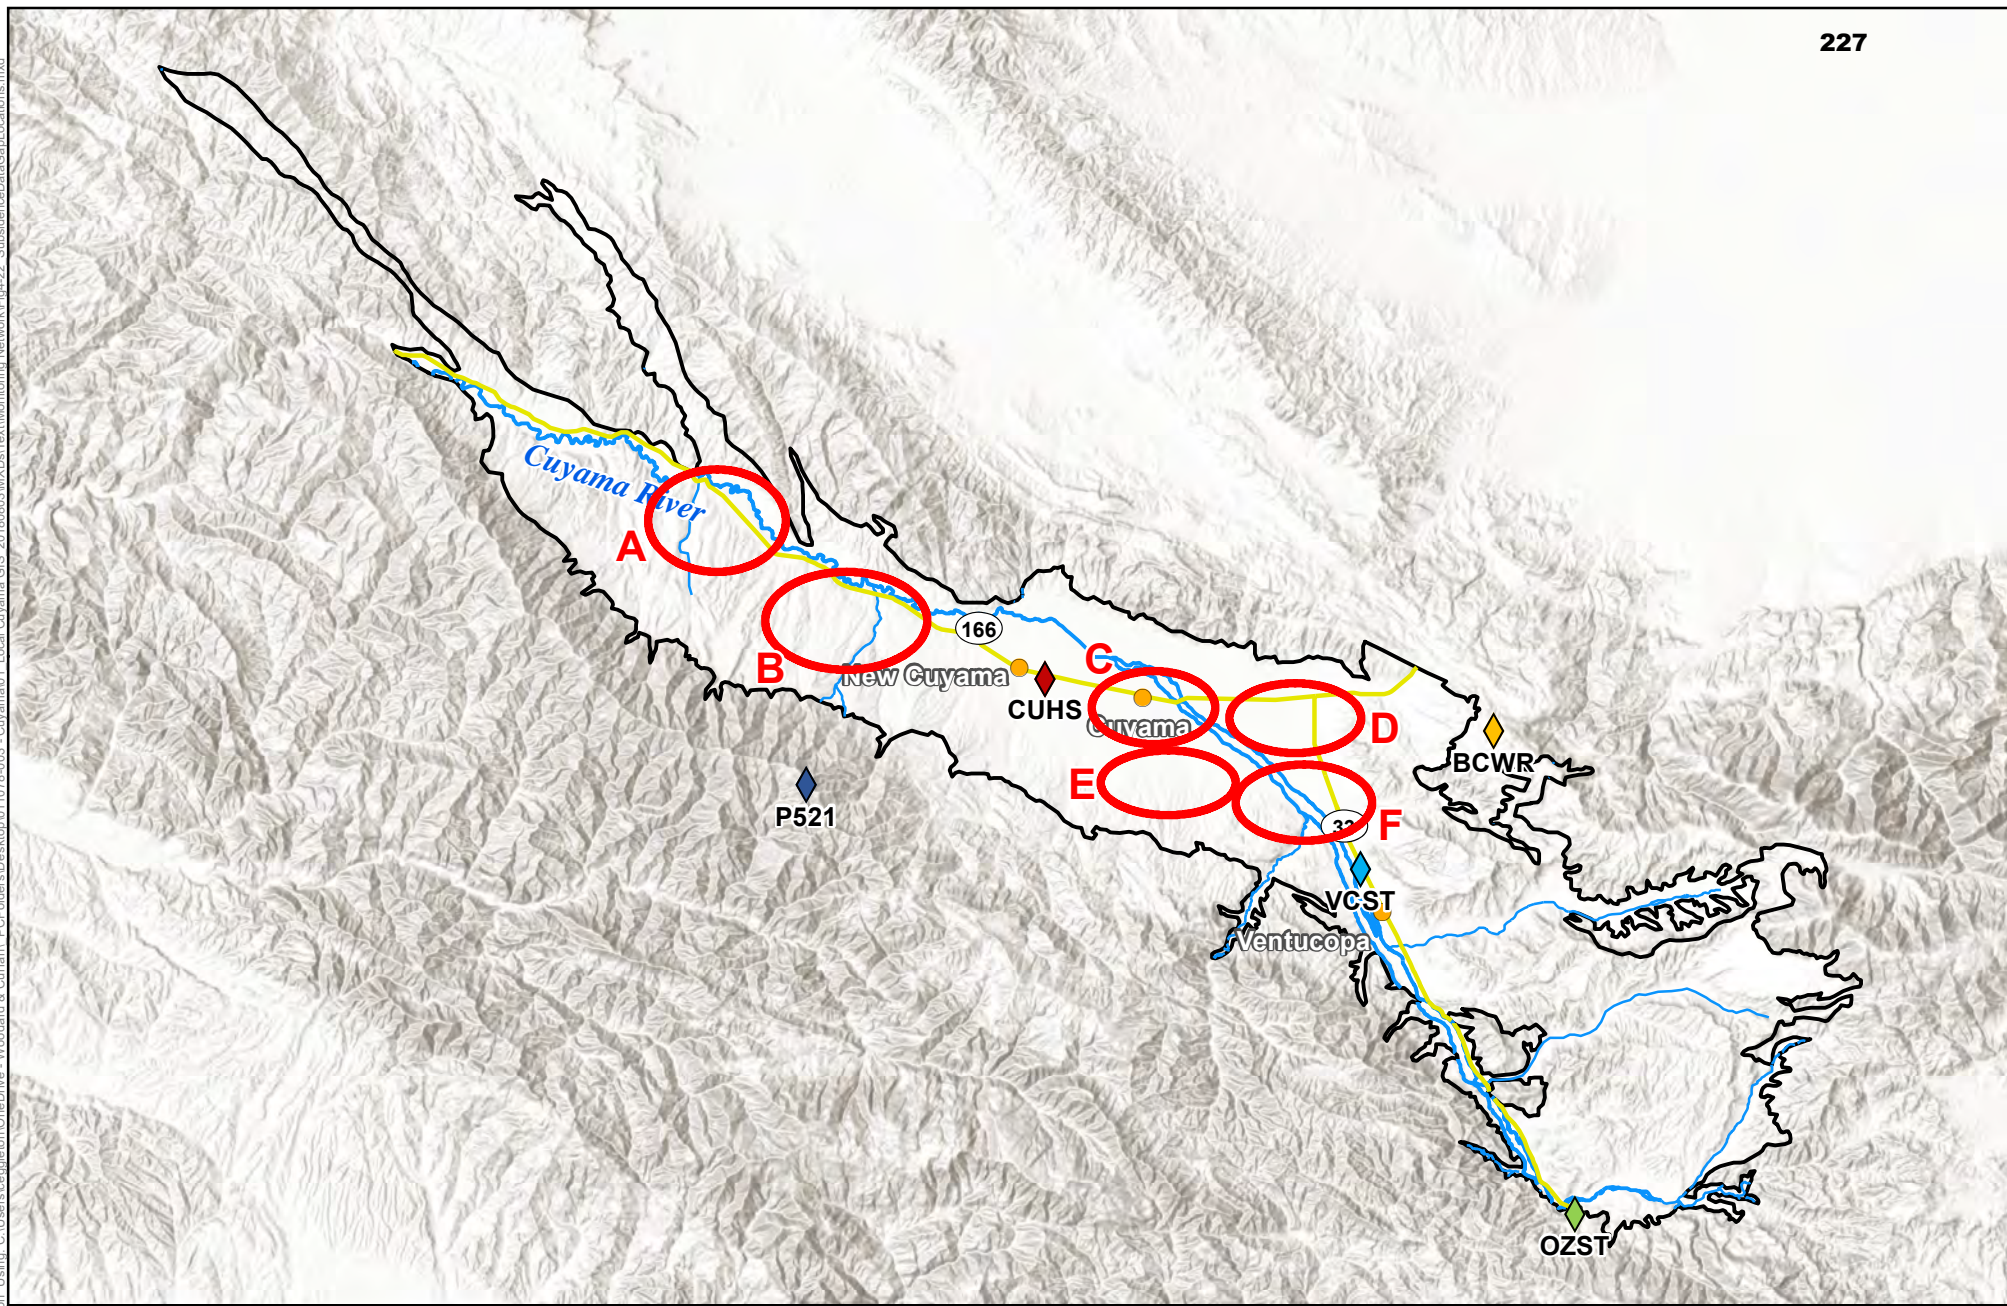


Figure 4-23: Subsidence Monitoring Location Data Gap Areas

Cuyama Basin Groundwater Sustainability Agency

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan

September 2018



Legend

- Cuyama Basin
- Cuyama River
- Towns
- Streams
- Highways



4.10 Depletions of Interconnected Surface Water Monitoring Network

Monitoring Networks for depletions of surface water cannot be developed until the numerical modeling effort can inform the GSP about the amounts and locations of depletions. This section will be added prior to plan completion.

References

- Belitz, Kenneth, Dubrovsky, N.M., Burow, Karen, Jurgens, Bryant, and Johnson, Tyler, 2003, Framework for a ground-water quality monitoring and assessment program for California: U.S. Geological Survey Water-Resources Investigations Report 03-4166, 78 p.
<https://pubs.usgs.gov/wri/wri034166/pdf/wri034166.pdf>
- California Department of Water Resources (DWR), 2010. *California statewide groundwater elevation monitoring (CASGEM) groundwater elevation monitoring guidelines*, December, 36 p.
<http://www.water.ca.gov/groundwater/casgem/documents.cfm>
- California Department of Water Resources, *CASGEM Online System*. Last modified date 7/19/2018. Accessed 1/19/2018.
[https://www.casgem.water.ca.gov/OSS/\(S\(231avqzxyuptks5zc1sgaalp\)\)/Default.aspx?ReturnUrl=%2fOSS%2fGIS%2fPopViewMap.aspx%3fPublic%3dY&Public=Y](https://www.casgem.water.ca.gov/OSS/(S(231avqzxyuptks5zc1sgaalp))/Default.aspx?ReturnUrl=%2fOSS%2fGIS%2fPopViewMap.aspx%3fPublic%3dY&Public=Y)
- California Department of Water Resources, *CASGEM: What is CASGEM?*. Accessed 8/29/2018.
<https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/CASGEM/Files/CASGEM-Brochure---What-is-CASGEM.pdf>
- California Department of Water Resources (DWR), *Groundwater Ambient Monitoring and Assessment Program (GAMA)*. 2018, Accessed 8/29/2018.
https://www.waterboards.ca.gov/water_issues/programs/gama/about.html
- California Department of Water Resources (DWR), *Groundwater Monitoring (CASGEM)*. 2018.
<https://water.ca.gov/Programs/Groundwater-Management/Groundwater-Elevation-Monitoring--CASGEM>
- California Department of Water Resources (DWR), *Irrigated Land Regulatory Program (ILRP)*, Accessed 8/29/2018. https://www.waterboards.ca.gov/centralvalley/water_issues/irrigated_lands/
- California Department of Water Resources (DWR), *Irrigated Land Regulatory Program (ILRP)- Surface Water Quality, Data: California Environmental Data Exchange Network (CEDEN)*, Accessed 8/29/2018.
https://www.waterboards.ca.gov/centralvalley/water_issues/irrigated_lands/water_quality/surface_water_quality_data/
- Heath, R.C., 1976. *Design of ground-water level observation-well programs*: Ground Water, V. 14, no. 2, p. 71-77.

- Hopkins, J., 1994. *Explanation of the Texas Water Development Board groundwater level monitoring program and water-level measuring manual*: UM-52, 53 p.
<http://www.twdb.texas.gov/groundwater/docs/UMs/UM-52.pdf>
- Koterba, M.T., Wilde, F.D., and Lapham, W.W., 1995, Ground-water data-collection protocols and procedures for the National Water-Quality Assessment Program: Collection and documentation of water-quality samples and reload data: U.S. Geological Survey Open-File Report 95-399, 113 p.
<https://pubs.usgs.gov/of/1995/ofr-95-399/pdf/of95-399.pdf>
- National Water Quality Monitoring Council (NWQMC), *About Us*. Accessed 8/29/2018.
https://acwi.gov/monitoring/about_the_council.html
- Sophocleous, M., 1983, *Groundwater observation network design for the Kansas groundwater management districts*. USA: Journal of Hydrology, vol.61, pp 371-389. Heath, R.C., 1976. *Design of ground-water level observation-well programs*: Ground Water, V. 14, no. 2, p. 71-77.
- Subcommittee on groundwater of the advisory committee on water information, 2013. A national Framework for Ground-Water Monitoring in the United States, 168 p.
http://acwi.gov/sogw/ngwmn_framework_report_july2013.pdf
- United States Geological Survey (USGS) National Water Information System (NWIS), 2012, Last Updated: 9 November 2017. Downloaded: 16 July 2018.
<https://maps.waterdata.usgs.gov/mapper/index.html>

Appendix A - Monitoring Protocols BMP

Appendix B - Water Quality Monitoring Standards From USGS



TO: Board of Directors
Agenda Item No. 7c

FROM: Lyndel Melton, Woodard & Curran

DATE: February 6, 2019

SUBJECT: Data Management Adoption

Issue

Recommend adoption of the Data Management section.

Recommended Motion

Adopt the Data Management section.

Discussion

An overview of the revised Data Management section is provided as Attachment 1. The comments and responses matrix is provided as Attachment 2, the redline strikeout is provided as Attachment 3, and the revised Monitoring Networks section is provided as Attachment 4.

Cuyama Basin Groundwater Sustainability Agency

Data Management Chapter Adoption

February 6, 2019



Data Management GSP Chapter

- Revised GSP Section provided to SAC and Board for review as part of Board Packet on January 25th
- Revised section reflects responses to comments received on November Draft version
- Data Management System GSP section describes:
 - Overview of the data management system
 - Functionality of the data management system
 - Data included in the data management system
- Seeking approval by CBGSA Board

**Cuyama Basin DMS
Summary of Public Comments and Responses
January 25, 2019**

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
Comments on DMS Section								
1	Matt Klinchuch	Cuyama Basin Water District	General				The GSP chapter and DMS appear to fulfill the basic requirements of GSP Regulation § 352.6 - Data Management System.	Comment noted. No change required in document.
2	Matt Klinchuch	Cuyama Basin Water District	Table 6-2				All data types within the DMS are listed in Table 6-2, but it is unclear which data are minimum required information (e.g., latitude and longitude) and which are optional parameters (e.g., casing perforations).	The table and text have been revised to indicate required fields.
3	Matt Klinchuch	Cuyama Basin Water District	6.3	3	2	In many cases ...	The chapter states "In many cases, there were discrepancies between ground surface elevation (GSE) of the well from different sources. In these cases, the ground surface elevation of the well was updated using the USGS digital elevation model." This might cause problems with calculation of water-level elevations, as the USGS DEM is less precise than surveyed GSE values, and based on a 30 meter by 30 meter horizontal resolution. DEM elevation values are interpolated and averaged within each model element. The use of DEM elevation data could affect assumed groundwater flow directions in areas with shallow groundwater gradients. More information should be provided to demonstrate the adequacy of this approach over evaluating and selecting the most likely of the elevations published in original data sources for the wells. At the least, wells with groundwater elevations calculated using DEM values should be flagged clearly in hydrographs, piezometric surface maps, and other interpretations.	Comment noted. The data used in the model can be re-evaluated in the future as the monitoring network is implemented and more data is available.
4	Matt Klinchuch	Cuyama Basin Water District	General				For "more detailed" instructions on DMS use, the user is referred to a sparse one-page user guide. Some pertinent details of user interaction and function limits could be provided, for example restrictions on data downloads for review of well construction details.	Comment noted. The Opti User Guide is a 17 page user manual for data managers and is provided separately from the 1 page Opti Quick Start Guide. The User Guide will be linked to the DMS Section upon finalization.
5	Catherine Martin	SLO County	6.2.1 User and Data Access...			Private data is monitoring data...	Please clarify, it is unclear if private data can be edited by ANY private user. Also, how is this performed? For example, is the private data associated to the user type with parcel/well id	The text has been revised for clarity. Sites (wells, gages, etc.) and their associated data (whether private, shared, or published) may only be edited by Administrators and Power Users associated with the Managing Entity.
6	Catherine Martin	SLO County	6.2.2 Data Entry and Validation	1	3	The data is validated using...	Please clarify -Who is performing and verifying the quality control checks?	The text has been revised for clarity. The system runs some validation checks to alert users to potential data quality issues. The data is validated by the Managing Entity's Administrators or Power Users.
7	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Data Collection...	1	2	In the Data Entry tool, new sites may be added by...	Please explain who is verify the data entry? Is the data being flagged as new, so it can be reviewed later by the GSA Board?	The text has been revised for clarity to match the existing conditions. If process changes are required for GSA Board review, the DMS can be configured to meet those needs during the implementation phase.
8	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Monitoring Data...			Quality Flag	Please explain the term "Quality Flag" and how is it used and by whom	The text has been revised for clarity. Quality flags are associated with individual measurements and include quality assurance descriptions (e.g., "Pumping", "Can't get tape in casing", etc.). The quality flags should be documented by the person taking the measurement.
9	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Data Validation	3	2	Users may access partially completed...	Consider adding a note to the bottom of the page to reference that this is a partially completed import validation, in case of data discrepancies.	The text has been revised for clarity. Partially completed logs are currently identified as incomplete in the DMS import logs.
10	Catherine Martin	SLO County	6.3 Data Included in the Data...	2		Groundwater Elevation (2 parameters)...	Please list these parameters. The GSA Board may need this information to resolve any data discrepancies. Can the list of parameters grow?	The text has been revised to list parameters. The list of parameters can grow as the needs of the GSA change over time.
11	Matthew Scudato	SBCWA	6.2 Functionality of the Data...	2	3	For more detailed instructions on ...	Provide a hyperlink to the user's guide here	Comment noted. Hyperlink will be included upon finalizing and posting the User Guide.
12	Matthew Scudato	SBCWA	6.2.2 Data Entry and Validation	1	1	To encourage agency and user participation...	This possibly helps maintain consistency but how do these tools improve data quality? Data quality is a function of training, following protocols, and equipment calibrations combined to create defensible data. It even mentions below in Data Validation that these data may not be accurate.	Comment noted. The text has been revised for clarity.
Comments on topics separate from the DMS Section								
13	Matt Klinchuch	Cuyama Basin Water District	General				Clustering effects. The potential effect of data clustering on conclusions drawn from parts of the network with very high well densities also is not discussed. The well density discussion needs to consider the potential effects of data clustering on conclusions drawn from aggregation of water level data. For example, if Undesirable Results are defined as a certain percentage of monitoring network wells experiencing water levels below their Minimum Thresholds, clustering of wells through intentional "selection of additional wells in heavily pumped areas" may artificially magnify the apparent portion of the basin affected, increasing the likelihood of it being judged as out of compliance with sustainability criteria.	This was accounted for in the selection of wells included in the Representative Monitoring Network, and will be addressed in the Sustainability Thresholds GSP section.
14	Matt Klinchuch	Cuyama Basin Water District	General				A number of properties including well construction details and measuring-point (MP) and ground surface (GS) elevations cannot be queried in the public "Opti" interface. Some of the data can be viewed on a well-by-well basis, but the use of tables and queries is very limited. This lack of transparency makes quantitative evaluation by outside parties difficult.	Comment noted. No change required in document. Will evaluate as enhancements to Opti query tool during implementation phase.
15	Matt Klinchuch	Cuyama Basin Water District	General				Queries seem to hang without producing consistent results depending on the browser used to access the website. For example, the Opti system seems to produce better results using Google Chrome than Mozilla Firefox, and Microsoft Internet Explorer is stated as not compatible at all.	Comment noted. No change required in document. Will evaluate Opti query tool performance.
16	Matt Klinchuch	Cuyama Basin Water District	General				A few queries to test the site's functions revealed some potential structural problems with the DMS. In one example, a query for all wells with Managing Agency = Cuyama Basin GSA returns an extensive list of wells but when the data are downloaded to an Excel format file, only subsidence data for two sites (not wells, apparently) are produced. In another example, a query for Reference ET > 0 appears to be coded into the menu system but running the query produces no records.	Could not reproduce results described. A query for all wells with Managing Entity = "Cuyama Basin GSA" and subsequent Excel export produced expected results. More information is needed to try and identify the issue described. The system is coded for more data types (e.g., Reference ET) than are currently collected for future expansion of data efforts.
17	Catherine Martin	SLO County	6.2 Functionality of the Data...				Please clarify - Does the GSA need agreements with well owner for the information they are supplying? For example, if someone is adding a new well to the DMS, can the board use the well data in their monitoring network? What is the GSA process to approve a new groundwater well for the DMS?	These issues will be addressed during the GSP implementation phase.
18	Catherine Martin	SLO County	6.2.1 User and Data Access...				Please clarify - Does the DMS track what data was changed and by what user?	The data record and user associated with measurement data entry/modification is stored in the DMS but not currently viewable in the tabular data output.

**Cuyama Basin DMS
Summary of Public Comments and Responses
January 25, 2019**

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
19	Catherine Martin	SLO County	6.2.1 User and Data Access...			System Administrator users manage...	Please clarify - Who is the system administrator? Does the GSA need to designate someone?	Currently, the Consultant team is the System Administrator. The GSA can designate a System Administrator as desired.
20	Catherine Martin	SLO County	6.2.1 User and Data Access...			The Cuyama Basin GSA is...	Please clarify term "Cuyama Basin GSA" – Do you mean GSA Board members, Executive Director, or both? Do you need the Board to address this and list who is the managing entity(ies)?	It is currently the Executive Director and GSA consultants. The GSA Board will decide on the appropriate party for managing the DMS in the future.
21	Catherine Martin	SLO County	Table 6-2			Data Collection Site Information	Is there a way to rank the groundwater well locations/elevations on accuracy? For example, rank (1) – accurate with little risk to location/ elevation to rank 3 – not as accurate, considering surveying the groundwater well to verify location/elevation	That ranking does not currently exist in the DMS, but can be added is needed during the implementation phase.
22	Ray Dienzo	SLO County	6.2.2 Data Entry and Validation - Monitoring Data...	1	1	Monitoring data including but not limited to...	Would Land Use data be included in this data set?	Land use is currently not included in this dataset. Additional data needs can be evaluated and potentially included during the implementation phase.
23	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Data Validation				To help address data questions, is there a column to note who revised or entered the data?	The data record and user associated with measurement data entry/modification is stored in the DMS but not currently viewable in the tabular data output.
24	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Data Validation	1	2	The entities that maintain the monitoring data...	Who will keep the DMS maintained and updated?	DMS maintenance and update will be determined by the Cuyama Subbasin GSA Board.
25	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Data Validation	1	2	The entities that maintain the monitoring data...	Please list all assumptions made for the database, such as locations of each well and how they were verified, such as by a GPS survey, lats/logs, google maps, and etc. Consider approaching the GSA Board with a disclaimer on the DMS for data and accuracy.	Comment noted. A disclaimer window has been added upon logging into the DMS.
26	Catherine Martin	SLO County	6.2.2 Data Entry and Validation - Data Validation	2	1	Upon saving the data in the data entry interface...	Can the GSA Board increase the list of data validation checks?	Comment noted. No change required in document. Will work with Cuyama Subbasin GSA to evaluate need for additional data validation checks during implementation phase.
27	Ray Dienzo	SLO County	6.2.3 Visualization and Analysis	1	1	Transparent visualization and analysis	Can it be incorporated into their own DMS system?	There are many options for integrating different DMS systems and functionalities. These options and the exact requirement would need to be identified and evaluated for inclusion during the implementation phase.
28	Catherine Martin	SLO County	6.3 Data Included in the Data...	5	2	Using the DMS data viewing capabilities...	Consider asking the GSA Board, if they would like a list of recommendations to this chapter, such as below. 6.4 RECOMMENDATIONS Recommendation to survey each groundwater well, as discussed on Page 7 of the DWR BMP Groundwater Monitoring Protocols, Standards, and Sites Best Management Practice, December 2016. •the elevation of the Reference Point (RP) on the well casing of each well must be surveyed to the North American Vertical Datum of 1988 (NAVD88), or a local datum that can be converted to NAVD88. The elevation of the RP must be accurate to within 0.5 foot. It is preferable for the RP elevation to be accurate to 0.1 foot or less.	Comment noted. This can be addressed by the GSA Board during the implementation phase.
29	Brenon Kelly	Quail Springs Permaculture	General				The Data Management System has been developing with steady improvements being made over time. However, several issues with functionality and the need for more complete data inputs still persist. The wells in the Monitoring Network are not in a viewable layer. And a search by State ID #s is not cross referenced with the Opti ID #s, challenging the users ability to find a particular well.	Comment noted. The DMS will be updated to display wells in the Monitoring Network once the Monitoring Network has been finalized. State Well Numbers and Opti IDs (Site Name) are cross referenced in the Site List. Consultant team will evaluate updating the Query tool to reflect the cross reference and update functionality as needed during the implementation phase.
30	Brenon Kelly	Quail Springs Permaculture	6.2.2 Data Entry and Validation, page 6-2				Although some of the critically important data has been entered, many of the data parameters on table 6-2 are completely blank throughout the DMS. The fields that are most important to understanding the aquifer a particular well might represent is the depth and casing perforation intervals. None of this is available in Opti, yet. I'm told much of this data is in W&C's hands, but are not able to be input due to time & budget. Why can't the wells selected for the Groundwater Level Monitoring Network be viewed as a subset or a separate layer? Same for any of the other sites in the Monitoring Network? Which wells are the representative Groundwater Quality Monitoring wells? If "The data is validated using a number of quality control checks prior to inclusion in the DMS." What are the QC/QA checks? As we move forward, in order to help promote user confidence in the data stored and published in the DMS, some ground truthing and well site canvassing will be required by a licensed hydrogeologist to verify and complete the understanding of the Monitoring Network wells and their data.	Comments noted. Additional data may be added during the implementation phase. The DMS will be updated to display wells in the Monitoring Network once the Monitoring Network has been finalized. The QC/QA checks performed by the DMS are listed in Section 6.2.2 and include: • Duplicate measurements: The database checks for duplicate entries based on the unique combination of site, data type, date, and measurement value. • Inaccurate measurements: The database compares data measurements against historical data for the site and flags entries that are outside the historical minimum and maximum values. • Incorrect data entry: Data field entries are checked for correct data type, e.g., number fields do not include text, date fields contain dates, etc.
31	Brenon Kelly	Quail Springs Permaculture	6.2.4 Query and Reporting, page 6-5				The query tool does not allow a well to be searched by the various other ID#s like the State Well ID, USGS Code, or CASGEM ID, even when this data is present. This is unnecessarily cumbersome. A cross reference table should be made available if the DMS can't search for it. The Analysis Tools and the toolbox mentioned sounds very helpful but it is not part of the DMS. Will the DMS ever actually offer any of these analysis tools, including contouring, total water budget visualization, and management area tracking?	Enhancements to the Query tool will be evaluated and implemented as needed during the plan implementation phase. The tools discussed in the DMS section of the GSP are currently available for non-public users. Access will be granted for Monitoring Entities and their associated users to these tools. Additional tools will be made available as needed during the implementation phase.
32	Matthew Scudato	SBCWA	6.1 Overview of the Cuyama Basin...	2	3	The site may be accessed here:	Where will this site ultimately reside? It shouldn't be in the system of W&C, nor should their name be part of this URL. Does the GSA own the DMS and will it have access once W&C's contract ends?	To be determined by the Cuyama Subbasin GSA Board. W&C can direct the DMS to a domain of the GSA's choosing.
33	Matthew Scudato	SBCWA	6.2.2 Data Entry and Validation - Data Collection...	1	2	In the Data Entry tool, new sites may be added by...	May not want to provide access to create new sites to too many users. This could create issues with overlap.	Comment noted. Access will be determined by Cuyama Subbasin GSA Board.
34	Matthew Scudato	SBCWA	6.2.2 Data Entry and Validation - Data Collection...	1	3	Existing sites may be updated using the Edit Site...	A feature should be added (similar to the CASGEM portal) which automatically tracks ALL edits to data and site information to include date/time/user/edit.	Comment noted. Will evaluate feasibility and address during implementation phase.

Cuyama Basin DMS
Summary of Public Comments and Responses
January 25, 2019

Comment #	Commenter	Commenter Organization	Section	Section Paragraph #	Paragraph's Sentence #	Sentence Starts with, "...	Comment	Response to Comment
35	Matthew Scrudato	SBCWA	6.2.2 Data Entry and Validation - Data Collection...	2	1	The information that is collected for sites...	Many of these items could use additional clarification for the user and entity inputting these data. Examples include..... 1)-Lat/Long-accuracy and how was the information obtained. Cell phone, GPS, DGPS, etc. NAD27 or NAD83, or.....? 2)-Accuracy of GSE and how was the information obtained? NAVD29 or NAVD88 or.....?	Comment noted. Will evaluate feasibility and address during implementation phase.
36	Matthew Scrudato	SBCWA	6.2.2 Data Entry and Validation - Monitoring Data...				Can we add a function to upload photos and measurement field notes? Storing this original data and viewing changes to the well head over many years will be useful. I can't tell if these are options, but additional things to add to this list are..... 1)-Time of measurement. 2)-Status (pumping, nearby pumping, dry, flowing, etc) 3)-Accuracy of measurement 4)-Equipment used to make the measurement (steel tape, electric tape, etc.) and was this equipment calibrated? Calibration paperwork should be loaded to this data portal for reference. 5)-Things noted in Supplemental Info are mentioned in Table 6.2 and linked to the well. These shouldn't be changed during measurements unless the reference point changed as a result of breaking or modification.	Comment noted. Will evaluate feasibility and address during implementation phase.
37	Matthew Scrudato	SBCWA	6.2.2 Data Entry and Validation - Data Validation	1	1	Quality control helps ensure the integrity....	Data validation is a huge issue in the basin, but we understand this section is strictly related to the DMS. Possibly a footnote explaining this issue with data quality should be provided to the user. Possibly verification/statement that certain protocols were followed when making the measurement? Additionally, data quality can be better verified by adding entries which..... 1)-indicate data accuracy (0.01 ft, 0.1 ft, 0.5 ft, to the nearest foot, etc). 2)-equipment calibration 3)-where two consecutive measurements completed? 4)-availability of field notes	Comment noted. Will evaluate feasibility and address during implementation phase.
38	Unknown	SBCWA	6.2.2 Data Entry and Validation - Data Validation	2		Inaccurate measurements: The database...	Many of the historical data were collected by private entities with no QA/Q processes in place. In addition, in a declining basin, one would expect to continually see entries outside the historical minimum values.	Comment noted. No change required in document.
39	Matthew Scrudato	SBCWA	6.2.2 Data Entry and Validation - Data Validation	3	3	This allows a second person to also access the...	There should be confirmation that 2 individuals reviewed these data. Possibly an option for a second user to login and initial that the data have been visually confirmed.	Comment noted. Will evaluate feasibility and address during implementation phase.
40	Mike Post		General				Where there are multiple data sources for one site that the most negative data be assumed as the most accurate pending implementation of the monitoring system	Comment noted. Will evaluate feasibility and address during implementation phase.

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan Data Management System Draft

Prepared by:



~~November 2018~~ January 2019

Chapter 6 Data Management System

This chapter includes the Data Management System Section that satisfies § 352.6 of the Sustainable Groundwater Management Act Regulations. This section contains three main subsections:


- Overview of the Cuyama Basin Data Management System
- Functionality of the Data Management System
- Data Included in the Data Management System

6.1 Overview of the Cuyama Basin Data Management System

The Cuyama Basin Data Management System (DMS) is implemented using the Opti platform. The DMS serves as a data sharing portal to enable utilization of the same data and tools for visualization and analysis to support sustainable groundwater management and transparent reporting of data and results.

The DMS is web-based and publicly accessible using common web browsers including Google Chrome, Firefox, and Microsoft Edge. It is a flexible and open software platform that utilizes familiar Google maps and charting tools for analysis and visualization. The site may be accessed here:

<http://opti.woodardcurran.com/cuyama>

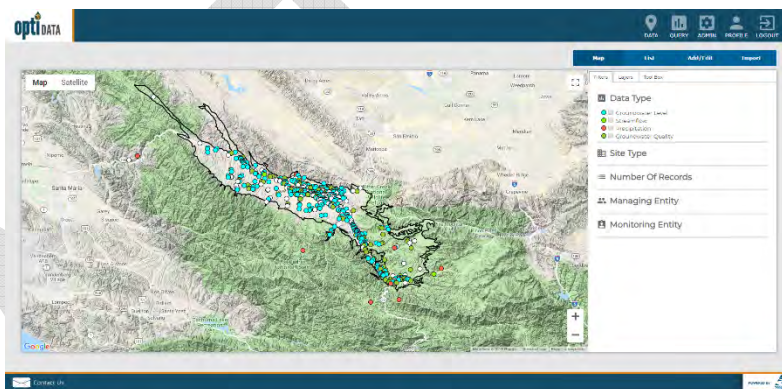

6.2 Functionality of the Data Management System

The DMS is a modular system that includes numerous tools to support GSP development and ongoing implementation, including:

- User and Data Access Permissions
- Data Entry and Validation
- Visualization and Analysis
- Query and Reporting

The DMS can be configured for additional tools and functionality as the needs of the GSA change over time. The following sections briefly describe the currently configured tools. For more detailed instructions on the usage of the DMS, please refer to the Opti User Guide.

6.2.1 User and Data Access Permissions

User access permissions are controlled through several user types that have different roles in the DMS as summarized in Table 6-1 below. These user types are broken into three high-level categories:

- System Administrator users manage information at a system-wide level, with access to all user accounts and entity information. System Administrators can set and modify user access permissions when an entity is unable to do so.

- Managing Entity (Administrator, Power User, User) users are responsible for managing their entity's site/monitoring data and can independently control access to this data. Entity users can view and edit their entity's data and view (not edit) shared or published data of other entities. An entity's site information (wells, gages, etc.) and associated data may only be edited by Administrators and Power Users associated with the entity. Note: *The Cuyama Basin GSA is currently configured as the Managing Entity for all datasets.*
- Public users may view data that is published but may not edit any information. These users may access the DMS using the Guest Login feature on the login screen.

Monitoring sites and their associated datasets are added to the DMS by Managing Entity Administrators or Power Users. In addition to the user permissions, data access to the monitoring datasets is also controlled through three options:

- Private data is monitoring data that is only available for viewing and editing, depending on user type, by the entity's associated user that is managing the data in the DMS.
- Shared data is monitoring data that is available for viewing by all users in the DMS (excludes Public Users).
- Public data is monitoring data that is available publicly and can be viewed by all user types in the DMS and may be published to other sites or DMSs as needed.

The Managing Entity Administrators have the ability to set and maintain the data access options for each dataset associated with their entity.

Modules/Submodules	System Administrators	Entity			Public
		Admin	Power User	User	
Data: Map	●	●	●	●	○
Data: List	●	●	●	●	○
Data: Add/Edit	●	●	●		
Data: Import	●	●	●		
Query	●	●	●	●	○
Admin	●				
Profile	●	●	○	○	○

● Indicates access to all functionality, ○ Indicates access to partial functionality (see explanations in following sections)

Table 6-1: Data Management System User Types

6.2.2 Data Entry and Validation

To encourage agency and user participation in the DMS, data entry and import tools are easy-to-use, accessible over the web, and help maintain data quality consistency and standardization. The DMS allows Entity Administrators and Power Users to enter data either manually via easy-to-use interfaces, or through an import tool utilizing Excel templates, ensuring data may be entered into the DMS as soon as possible after collection. The data is validated by Managing Entity's Administrators or Power Users using a number of quality control checks prior to inclusion in the DMS.

Data Collection Sites

Site information is input for groundwater wells, stream gages, and precipitation meters manually either through the Data Entry tool or when prompted in the Import tool. In the Data Entry tool, new sites may be

added by clicking on New Site. Existing sites may be updated using the Edit Site tool. During data import, the sites associated with imported data are checked by the system against the existing site list in the DMS. If the site is not in the existing site list, the user is prompted to enter the information via the New Site tool before the data import can proceed.

The information that is collected for sites is shown in Table 6-2. Required fields are indicated with an asterisk.

Basic Info	Well Info	Construction Info
Site Type* Local <u>Opti</u> Site Name* Local Site <u>NameID</u> * <u>Additional Name</u> Latitude/Longitude* Description County Managing Entity* Monitoring Entity* Type of Monitoring Type of Measurement Monitoring Frequency	State Well ID <u>MSC (Master State Well Code)</u> USGS Code CASGEM ID Ground Surface Elevation (ft) Reference Point Elevation (ft) Reference Point Location Reference Point Description Well Use Well Status Well Type Aquifers Monitored Groundwater Basin Name/Code Groundwater Elevation Start <u>Begin</u> /End Date <u>Groundwater Elevation Measurement Count</u> <u>Water Level Measurement Method</u> Groundwater Quality Start <u>Begin</u> /End Date <u>Groundwater Quality Measurement Count</u> Comments	Total Well Depth Borehole Depth Casing Perforations <u>Top/Bottom Elevation</u> Casing Diameter Casing Modifications Well Capacity Well Completion Report Number Comments

* Required fields; all other fields are optional

Table 6-2: Data Collection Site Information

Monitoring Data Entry

Monitoring data including but not limited to groundwater elevation, groundwater quality, streamflow, and precipitation, may be input either manually through the Data Entry tool or using templates in the Import tool. The Data Entry tool allows users to select a site and add data for the site using a web-based tool. The following information is collected:

- Data Type (e.g. groundwater elevation, groundwater quality, streamflow, or precipitation)
- Parameter for selected Data Type, units populate based on selection
- Date of Measurement
- Measurement Value
- Quality Flag (e.g. [quality assurance description for the measurement such as “Pumping”, “Can’t get tape in casing”, etc. as documented by the Data Collector](#))
- Data Collector
- Supplemental Information based on Data Type (e.g. Reference Point Elevation, Ground Surface Elevation, etc.)

Data import templates include the same data entry fields and are available for download from the DMS. The Excel-based templates contain drop down options and field validation similar to the data entry interface.

Data Validation

Quality control helps ensure the integrity of the data added to the DMS. The entities that maintain the monitoring data that were loaded into the DMS may have performed previous validation of that data; no effort was made to check or correct that previous validation and it was assumed that all data provided was valid. While it is nearly impossible to determine complete accuracy of the data added to the DMS since the DMS cannot detect incorrect measurements due to human error or mechanical failure, it is possible to verify that the data input into the DMS meets some data quality standards. This helps promote user confidence in the data stored and published for visualization and analysis.

Upon saving the data in the data entry interface or importing the data using the Excel templates, the following data validation checks are performed by the DMS:

- **Duplicate measurements:** The database checks for duplicate entries based on the unique combination of site, data type, date, and measurement value.
- **Inaccurate measurements:** The database compares data measurements against historical data for the site and flags entries that are outside the historical minimum and maximum values.
- **Incorrect data entry:** Data field entries are checked for correct data type, e.g., number fields do not include text, date fields contain dates, etc.

Users are alerted to any validation issues and may either update the data entries or accept the values and continue with the entry/import. Users may access partially completed import validation through the import logs that are saved for each data import. [The partially imported data are identified in the Import](#)


[Log with an incomplete icon under the Status field.](#) This allows a second person to also access the imported data and review prior to inclusion in the DMS.

6.2.3 Visualization and Analysis

Transparent visualization and analysis tools enable utilization of the same data and methodologies, allowing stakeholders and neighboring GSAs to use the same data and methods for tracking and analysis. In the Cuyama DMS, data visualization and analysis are performed in both Map and List views.

Map View

The Map view displays all sites (groundwater wells, stream gages, precipitation meters, etc.) in a map-based interface. The sites are color coded based on associated data type and may be filtered by different criteria such as number of records or monitoring entity. Users may click on a site to view the site detail information and associated data. The monitoring data is displayed in both chart and table formats. In these views, the user may select to view different parameters for the data type. The chart and table may be updated to display selected date ranges, and the data may be exported to Excel.

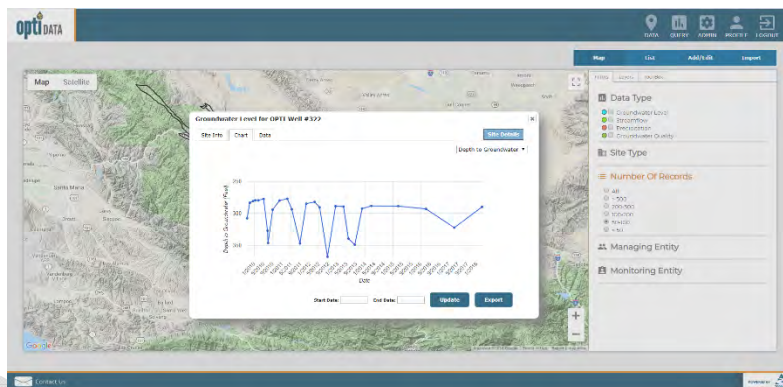

List View

The List view displays all sites (groundwater wells, stream gages, precipitation meters, etc.) in a tabular interface. The sites are listed according to site names and associated entities. The list can be sorted and filtered by different criteria such as number of records or monitoring entity. Similar to the Map view, users may click on a site to view the site detail information and associated data. The monitoring data is displayed in both chart and table formats. In these views, the user may select to view different parameters for the data type. The chart and table may be updated to display selected date ranges, and the data may be exported to Excel.

Analysis Tools

The Toolbox is available in the Map view and offers Administrative and Entity users access to the Well Tiering tool to support monitoring plan development. The flexibility of the DMS platform allows for future analysis tools, including contouring, total water budget visualization, and management area tracking.

6.2.4 Query and Reporting

The DMS has the ability to format and export data and analysis at different levels of aggregation, and in different formats, to support local decision making and for submission to various statewide and local programs (i.e., SGMA, CASGEM, GAMA, etc.).

Ad-hoc Query

The data in the DMS can be queried and reported using the Query Tool. The Query Tool includes the ability to build ad-hoc queries using simple options. The data can be queried by:

- Monitoring or Managing Entity
- Site Name
- Data Type

Once the type of option is selected, the specific criteria may be selected, e.g., groundwater elevation greater than 100 ft. Additionally, users may include time periods as part of the query. The query options can build upon each other to create reports that meet specific needs. Queries may be saved and will display in the saved query drop-down for future use.

The query results are displayed in a map format and a list format. In both the map and list views, the user may click on a well to view the associated data. The resulting data of the query may be exported to Excel.

Standard Reports

The DMS can be configured to support wide-ranging reporting needs through the Reports Tool. Standard report formats may be generated based on a predetermined format and may be created at the click of a button. These report formats may be configured to match state agency requirements for submittals, including annual reporting of monitoring data that must be submitted electronically on forms provided by the Department of Water Resources.

6.3 Data Included in the Data Management System

Many monitoring programs exist at both the local and state/federal levels. A cross-sectional analysis was conducted within the basin to document and assess the availability of data within the basin, as well as statewide or federal databases that provide data relevant to Basin.

The DMS can be configured to include a wide variety of data types and associated parameters. Based on the analysis of existing datasets within the basin and the GSP needs, the ~~following~~ data types shown in the table below were identified and are currently ~~included~~ configured in the DMS.:

~~Groundwater Quality (17 parameters)~~

~~Streamflow (1 parameter)~~

~~Precipitation (1 parameter)~~

~~Subsidence (1 parameter)~~

Data Type	Parameter	Units	Currently Has Data in DMS
Groundwater Elevation	Depth to Groundwater	feet	Yes
	Groundwater Elevation	feet	Yes
Groundwater Quality	Total Dissolved Solids (TDS)	MG/L	Yes
	Nitrate (NO3)	MG/L	Yes
	Arsenic	UG/L	Yes
	Benzene	UG/L	
	Chloride	MG/L	
	Hexavalent Chromium (CR6)	UG/L	
	Dibromochloropropane (DBCP)	UG/L	
	Methyl Tertiary Butyl Ether (MTBE)	UG/L	
	Perchlorate	UG/L	
	Tetrachloroethylene (PCE)	UG/L	
	Specific Electrical Conductivity (SC)	UMHOS/CM	
	1,1,1-Trichloroethane (111-TCA)	UG/L	
	Trichloroethylene (TCE)	UG/L	
	1,2,3-Trichloropropane (123-TCP)	UG/L	
	CL	PPM	

	EC	Mmhos	
	TDS	PPM	
Streamflow	Streamflow	CFS	Yes
Precipitation	Precipitation	inches	Yes
	Reference Evapotranspiration (ETo)		
	Average Air Temperature		
Subsidence	Subsidence	Vertical (mm)	Yes

Table 6-3: Data Collection Site Information Types and Their Associated Parameters Configured in the DMS

Additional data types and parameters can be added and modified as the DMS grows over time.

The data was collected from a variety of sources, as shown in Table 6-3 below. Each dataset was reviewed for overall quality and consistency prior to consolidation and inclusion in the database. In many cases, there were discrepancies between the ground surface elevation (GSE) of the well from different sources. In these cases, the ground surface elevation of the well was updated using the USGS digital elevation model (DEM).

The groundwater wells shown in the DMS are those that are included data sets provided by the monitoring data sources shown below for groundwater elevation and quality. These do not include all wells currently used for production and may include wells historically used for monitoring that do not currently exist. Care was taken to minimize duplicative wells in the DMS. As datasets were consolidated, sites were evaluated based on different criteria (e.g., naming conventions, location, etc.) to determine if the well was included in a different dataset. Datasets for the wells were then associated with the same well, where necessary.

After the data was consolidated and reviewed for consistency, it was loaded into the DMS. Using the DMS data viewing capabilities, the data was reviewed for completeness and consistency to ensure the imports were successful.

Data Source	Datasets Collected	Date Collected	Activities Performed
US Geological Survey (USGS)	<ul style="list-style-type: none"> Groundwater Elevation Streamflow Precipitation 	5/4/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
Department of Water Resources (DWR) CASGEM/Water Data Library (WDL)	<ul style="list-style-type: none"> Groundwater Elevation 	4/18/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
San Luis Obispo County	<ul style="list-style-type: none"> Groundwater Elevation Groundwater Quality 	4/2/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
Santa Barbara County Water Agency	<ul style="list-style-type: none"> Groundwater Elevation Precipitation 	3/27/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
Ventura County	<ul style="list-style-type: none"> Groundwater Elevation Groundwater Quality Precipitation 	3/8/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
DWR Natural Resources Agency	<ul style="list-style-type: none"> Groundwater Quality 	6/14/2018	<ul style="list-style-type: none"> Removed duplicate records
GeoTracker	<ul style="list-style-type: none"> Groundwater Quality 	6/5/2018	<ul style="list-style-type: none"> Removed duplicate records
California Environmental Data Exchange Network (CEDEN)	<ul style="list-style-type: none"> Groundwater Quality 	8/29/2018	<ul style="list-style-type: none"> Removed duplicate records
National Water Quality Monitoring Council	<ul style="list-style-type: none"> Groundwater Quality 	6/1/2018	<ul style="list-style-type: none"> Removed duplicate records
UNAVCO	<ul style="list-style-type: none"> Ground Surface Elevation 	3/12/2018	<ul style="list-style-type: none"> None
Local Data	<ul style="list-style-type: none"> Groundwater Elevation Groundwater Quality Other 	Various	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells

Table 6-3: Sources of Data Included in the Data Management System

Cuyama Valley Groundwater Basin Groundwater Sustainability Plan Data Management System Draft

Prepared by:



January 2019

Chapter 6 Data Management System

This chapter includes the Data Management System Section that satisfies § 352.6 of the Sustainable Groundwater Management Act Regulations. This section contains three main subsections:


- Overview of the Cuyama Basin Data Management System
- Functionality of the Data Management System
- Data Included in the Data Management System

6.1 Overview of the Cuyama Basin Data Management System

The Cuyama Basin Data Management System (DMS) is implemented using the Opti platform. The DMS serves as a data sharing portal to enable utilization of the same data and tools for visualization and analysis to support sustainable groundwater management and transparent reporting of data and results.

The DMS is web-based and publicly accessible using common web browsers including Google Chrome, Firefox, and Microsoft Edge. It is a flexible and open software platform that utilizes familiar Google maps and charting tools for analysis and visualization. The site may be accessed here:

<http://opti.woodardcurran.com/cuyama>

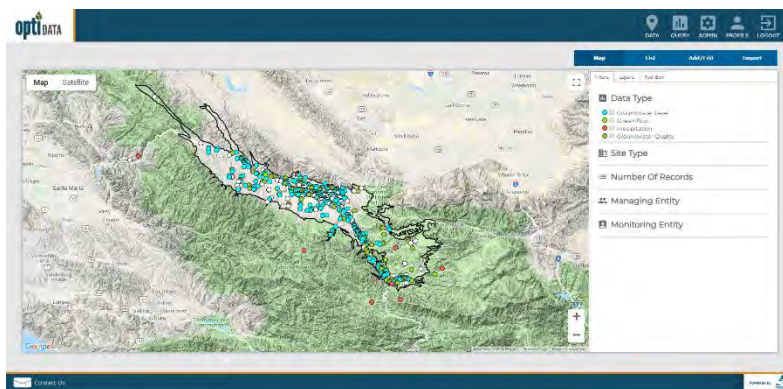

6.2 Functionality of the Data Management System

The DMS is a modular system that includes numerous tools to support GSP development and ongoing implementation, including:

- User and Data Access Permissions
- Data Entry and Validation
- Visualization and Analysis
- Query and Reporting

The DMS can be configured for additional tools and functionality as the needs of the GSA change over time. The following sections briefly describe the currently configured tools. For more detailed instructions on the usage of the DMS, please refer to the Opti User Guide.

6.2.1 User and Data Access Permissions

User access permissions are controlled through several user types that have different roles in the DMS as summarized in Table 6-1 below. These user types are broken into three high-level categories:

- System Administrator users manage information at a system-wide level, with access to all user accounts and entity information. System Administrators can set and modify user access permissions when an entity is unable to do so.

- Managing Entity (Administrator, Power User, User) users are responsible for managing their entity's site/monitoring data and can independently control access to this data. Entity users can view and edit their entity's data and view (not edit) shared or published data of other entities. An entity's site information (wells, gages, etc.) and associated data may only be edited by Administrators and Power Users associated with the entity. Note: *The Cuyama Basin GSA is currently configured as the Managing Entity for all datasets.*
- Public users may view data that is published but may not edit any information. These users may access the DMS using the Guest Login feature on the login screen.

Monitoring sites and their associated datasets are added to the DMS by Managing Entity Administrators or Power Users. In addition to the user permissions, access to the monitoring datasets is controlled through three options:

- Private data is monitoring data that is only available for viewing, depending on user type, by the entity's associated users in the DMS.
- Shared data is monitoring data that is available for viewing by all users in the DMS (excludes Public Users).
- Public data is monitoring data that is available publicly and can be viewed by all user types in the DMS and may be published to other sites or DMSs as needed.

The Managing Entity Administrators have the ability to set and maintain the data access options for each dataset associated with their entity.

Modules/Submodules	System Administrators	Entity			Public
		Admin	Power User	User	
Data: Map	●	●	●	●	○
Data: List	●	●	●	●	○
Data: Add/Edit	●	●	●		
Data: Import	●	●	●		
Query	●	●	●	●	○
Admin	●				
Profile	●	●	○	○	○

● Indicates access to all functionality, ○ Indicates access to partial functionality (see explanations in following sections)

Table 6-1: Data Management System User Types

6.2.2 Data Entry and Validation

To encourage agency and user participation in the DMS, data entry and import tools are easy-to-use, accessible over the web, and help maintain data consistency and standardization. The DMS allows Entity Administrators and Power Users to enter data either manually via easy-to-use interfaces, or through an import tool utilizing Excel templates, ensuring data may be entered into the DMS as soon as possible after collection. The data is validated by Managing Entity's Administrators or Power Users using a number of quality control checks prior to inclusion in the DMS.

Data Collection Sites

Site information is input for groundwater wells, stream gages, and precipitation meters manually either through the Data Entry tool or when prompted in the Import tool. In the Data Entry tool, new sites may be

added by clicking on New Site. Existing sites may be updated using the Edit Site tool. During data import, the sites associated with imported data are checked by the system against the existing site list in the DMS. If the site is not in the existing site list, the user is prompted to enter the information via the New Site tool before the data import can proceed.

The information that is collected for sites is shown in Table 6-2. Required fields are indicated with an asterisk.

Basic Info	Well Info	Construction Info
Site Type*	State Well ID	Total Well Depth
Opti Site Name*	MSC (Master State Well Code)	Borehole Depth
Local Site Name*	USGS Code	Casing Perforations Top/Bottom Elevation
Additional Name	CASGEM ID	Casing Diameter
Latitude/Longitude*	Ground Surface Elevation (ft)	Casing Modifications
Description	Reference Point Elevation (ft)	Well Capacity
County	Reference Point Location	Well Completion Report Number
Managing Entity*	Reference Point Description	Comments
Monitoring Entity*	Well Use	
Type of Monitoring	Well Status	
Type of Measurement	Well Type	
Monitoring Frequency	Aquifers Monitored	
	Groundwater Basin Name/Code	
	Groundwater Elevation Begin/End Date	
	Groundwater Elevation Measurement Count	
	Water Level Measurement Method	
	Groundwater Quality Begin/End Date	
	Groundwater Quality Measurement Count	
	Comments	


* Required fields; all other fields are optional

Table 6-2: Data Collection Site Information

Monitoring Data Entry

Monitoring data including but not limited to groundwater elevation, groundwater quality, streamflow, and precipitation, may be input either manually through the Data Entry tool or using templates in the Import tool. The Data Entry tool allows users to select a site and add data for the site using a web-based tool. The following information is collected:

- Data Type (e.g. groundwater elevation, groundwater quality, streamflow, or precipitation)
- Parameter for selected Data Type, units populate based on selection
- Date of Measurement

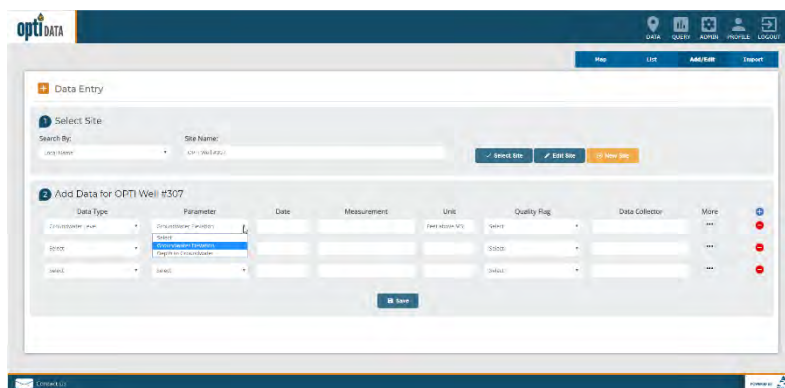

- Measurement Value
- Quality Flag (e.g. quality assurance description for the measurement such as “Pumping”, “Can’t get tape in casing”, etc. as documented by the Data Collector)
- Data Collector
- Supplemental Information based on Data Type (e.g. Reference Point Elevation, Ground Surface Elevation, etc.)

Data import templates include the same data entry fields and are available for download from the DMS. The Excel-based templates contain drop down options and field validation similar to the data entry interface.

Data Validation

Quality control helps ensure the integrity of the data added to the DMS. The entities that maintain the monitoring data that were loaded into the DMS may have performed previous validation of that data; no effort was made to check or correct that previous validation and it was assumed that all data provided was valid. While it is nearly impossible to determine complete accuracy of the data added to the DMS since the DMS cannot detect incorrect measurements due to human error or mechanical failure, it is possible to verify that the data input into the DMS meets some data quality standards. This helps promote user confidence in the data stored and published for visualization and analysis.

Upon saving the data in the data entry interface or importing the data using the Excel templates, the following data validation checks are performed by the DMS:

- **Duplicate measurements**: The database checks for duplicate entries based on the unique combination of site, data type, date, and measurement value.
- **Inaccurate measurements**: The database compares data measurements against historical data for the site and flags entries that are outside the historical minimum and maximum values.
- **Incorrect data entry**: Data field entries are checked for correct data type, e.g., number fields do not include text, date fields contain dates, etc.


Users are alerted to any validation issues and may either update the data entries or accept the values and continue with the entry/import. Users may access partially completed import validation through the import logs that are saved for each data import. The partially imported data are identified in the Import Log with an incomplete icon under the Status field. This allows a second person to also access the imported data and review prior to inclusion in the DMS.

6.2.3 Visualization and Analysis

Transparent visualization and analysis tools enable utilization of the same data and methodologies, allowing stakeholders and neighboring GSAs to use the same data and methods for tracking and analysis. In the Cuyama DMS, data visualization and analysis are performed in both Map and List views.

Map View

The Map view displays all sites (groundwater wells, stream gages, precipitation meters, etc.) in a map-based interface. The sites are color coded based on associated data type and may be filtered by different criteria such as number of records or monitoring entity. Users may click on a site to view the site detail information and associated data. The monitoring data is displayed in both chart and table formats. In these views, the user may select to view different parameters for the data type. The chart and table may be updated to display selected date ranges, and the data may be exported to Excel.

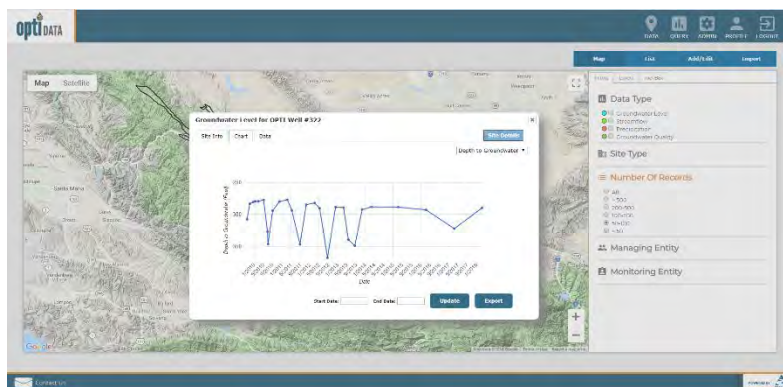

List View

The List view displays all sites (groundwater wells, stream gages, precipitation meters, etc.) in a tabular interface. The sites are listed according to site names and associated entities. The list can be sorted and filtered by different criteria such as number of records or monitoring entity. Similar to the Map view, users may click on a site to view the site detail information and associated data. The monitoring data is displayed in both chart and table formats. In these views, the user may select to view different parameters for the data type. The chart and table may be updated to display selected date ranges, and the data may be exported to Excel.

Analysis Tools

The Toolbox is available in the Map view and offers Administrative and Entity users access to the Well Tiering tool to support monitoring plan development. The flexibility of the DMS platform allows for future analysis tools, including contouring, total water budget visualization, and management area tracking.

6.2.4 Query and Reporting

The DMS has the ability to format and export data and analysis at different levels of aggregation, and in different formats, to support local decision making and for submission to various statewide and local programs (i.e., SGMA, CASGEM, GAMA, etc.).

Ad-hoc Query

The data in the DMS can be queried and reported using the Query Tool. The Query Tool includes the ability to build ad-hoc queries using simple options. The data can be queried by:

- Monitoring or Managing Entity
- Site Name
- Data Type

Once the type of option is selected, the specific criteria may be selected, e.g., groundwater elevation greater than 100 ft. Additionally, users may include time periods as part of the query. The query options can build upon each other to create reports that meet specific needs. Queries may be saved and will display in the saved query drop-down for future use.

The query results are displayed in a map format and a list format. In both the map and list views, the user may click on a well to view the associated data. The resulting data of the query may be exported to Excel.

Standard Reports

The DMS can be configured to support wide-ranging reporting needs through the Reports Tool. Standard report formats may be generated based on a predetermined format and may be created at the click of a button. These report formats may be configured to match state agency requirements for submittals, including annual reporting of monitoring data that must be submitted electronically on forms provided by the Department of Water Resources.

6.3 Data Included in the Data Management System

Many monitoring programs exist at both the local and state/federal levels. A cross-sectional analysis was conducted within the basin to document and assess the availability of data within the basin, as well as statewide or federal databases that provide data relevant to Basin.

The DMS can be configured to include a wide variety of data types and associated parameters. Based on the analysis of existing datasets within the basin and the GSP needs, the data types shown in the table below were identified and are currently configured in the DMS.

Data Type	Parameter	Units	Currently Has Data in DMS
Groundwater Elevation	Depth to Groundwater	feet	Yes
	Groundwater Elevation	feet	Yes
Groundwater Quality	Total Dissolved Solids (TDS)	MG/L	Yes
	Nitrate (NO3)	MG/L	Yes
	Arsenic	UG/L	Yes
	Benzene	UG/L	
	Chloride	MG/L	
	Hexavalent Chromium (CR6)	UG/L	
	Dibromochloropropane (DBCP)	UG/L	
	Methyl Tertiary Butyl Ether (MTBE)	UG/L	
	Perchlorate	UG/L	
	Tetrachloroethylene (PCE)	UG/L	
	Specific Electrical Conductivity (SC)	UMHOS/CM	
	1,1,1-Trichloroethane (111-TCA)	UG/L	
	Trichloroethylene (TCE)	UG/L	
	1,2,3-Trichloropropane (123-TCP)	UG/L	
	CL	PPM	
	EC	Mmhos	
	TDS	PPM	
Streamflow	Streamflow	CFS	Yes
Precipitation	Precipitation	inches	Yes
	Reference Evapotranspiration (ETo)		
	Average Air Temperature		
Subsidence	Subsidence	Vertical (mm)	Yes

Table 6-3: Data Types and Their Associated Parameters Configured in the DMS

Additional data types and parameters can be added and modified as the DMS grows over time.

The data was collected from a variety of sources, as shown in Table 6-3 below. Each dataset was reviewed for overall quality and consistency prior to consolidation and inclusion in the database. In many cases, there were discrepancies between the ground surface elevation (GSE) of the well from different sources. In these cases, the ground surface elevation of the well was updated using the USGS digital elevation model (DEM).

The groundwater wells shown in the DMS are those that are included data sets provided by the monitoring data sources shown below for groundwater elevation and quality. These do not include all wells currently used for production and may include wells historically used for monitoring that do not currently exist. Care was taken to minimize duplicative wells in the DMS. As datasets were consolidated, sites were evaluated based on different criteria (e.g., naming conventions, location, etc.) to determine if the well was included in a different dataset. Datasets for the wells were then associated with the same well, where necessary.

After the data was consolidated and reviewed for consistency, it was loaded into the DMS. Using the DMS data viewing capabilities, the data was reviewed for completeness and consistency to ensure the imports were successful.

Data Source	Datasets Collected	Date Collected	Activities Performed
US Geological Survey (USGS)	<ul style="list-style-type: none"> Groundwater Elevation Streamflow Precipitation 	5/4/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
Department of Water Resources (DWR) CASGEM/Water Data Library (WDL)	<ul style="list-style-type: none"> Groundwater Elevation 	4/18/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
San Luis Obispo County	<ul style="list-style-type: none"> Groundwater Elevation Groundwater Quality 	4/2/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
Santa Barbara County Water Agency	<ul style="list-style-type: none"> Groundwater Elevation Precipitation 	3/27/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
Ventura County	<ul style="list-style-type: none"> Groundwater Elevation Groundwater Quality Precipitation 	3/8/2018	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells
DWR Natural Resources Agency	<ul style="list-style-type: none"> Groundwater Quality 	6/14/2018	<ul style="list-style-type: none"> Removed duplicate records
GeoTracker	<ul style="list-style-type: none"> Groundwater Quality 	6/5/2018	<ul style="list-style-type: none"> Removed duplicate records
California Environmental Data Exchange Network (CEDEN)	<ul style="list-style-type: none"> Groundwater Quality 	8/29/2018	<ul style="list-style-type: none"> Removed duplicate records
National Water Quality Monitoring Council	<ul style="list-style-type: none"> Groundwater Quality 	6/1/2018	<ul style="list-style-type: none"> Removed duplicate records
UNAVCO	<ul style="list-style-type: none"> Ground Surface Elevation 	3/12/2018	<ul style="list-style-type: none"> None
Local Data	<ul style="list-style-type: none"> Groundwater Elevation Groundwater Quality Other 	Various	<ul style="list-style-type: none"> Removed duplicate records Recalculated GSE based on DEM on select wells

Table 6-3: Sources of Data Included in the Data Management System



TO: Standing Advisory Committee
Agenda Item No. 7d

FROM: Charles Gardiner, Catalyst Group

DATE: February 6, 2019

SUBJECT: Stakeholder Engagement Update

Issue

Update on the Cuyama Basin Groundwater Sustainability Agency Groundwater Sustainability Plan stakeholder engagement.

Recommended Motion

None – information only.

Discussion

Cuyama Basin Groundwater Sustainability Agency (CBGSA) Groundwater Sustainability Plan (GSP) outreach consultant the Catalyst Group's stakeholder engagement update is provided as Attachment 1.


Cuyama Basin Groundwater Sustainability Agency

Groundwater Sustainability Plan Stakeholder Engagement Update

February 6, 2019



Cuyama Basin Groundwater Sustainability Plan – Planning Roadmap

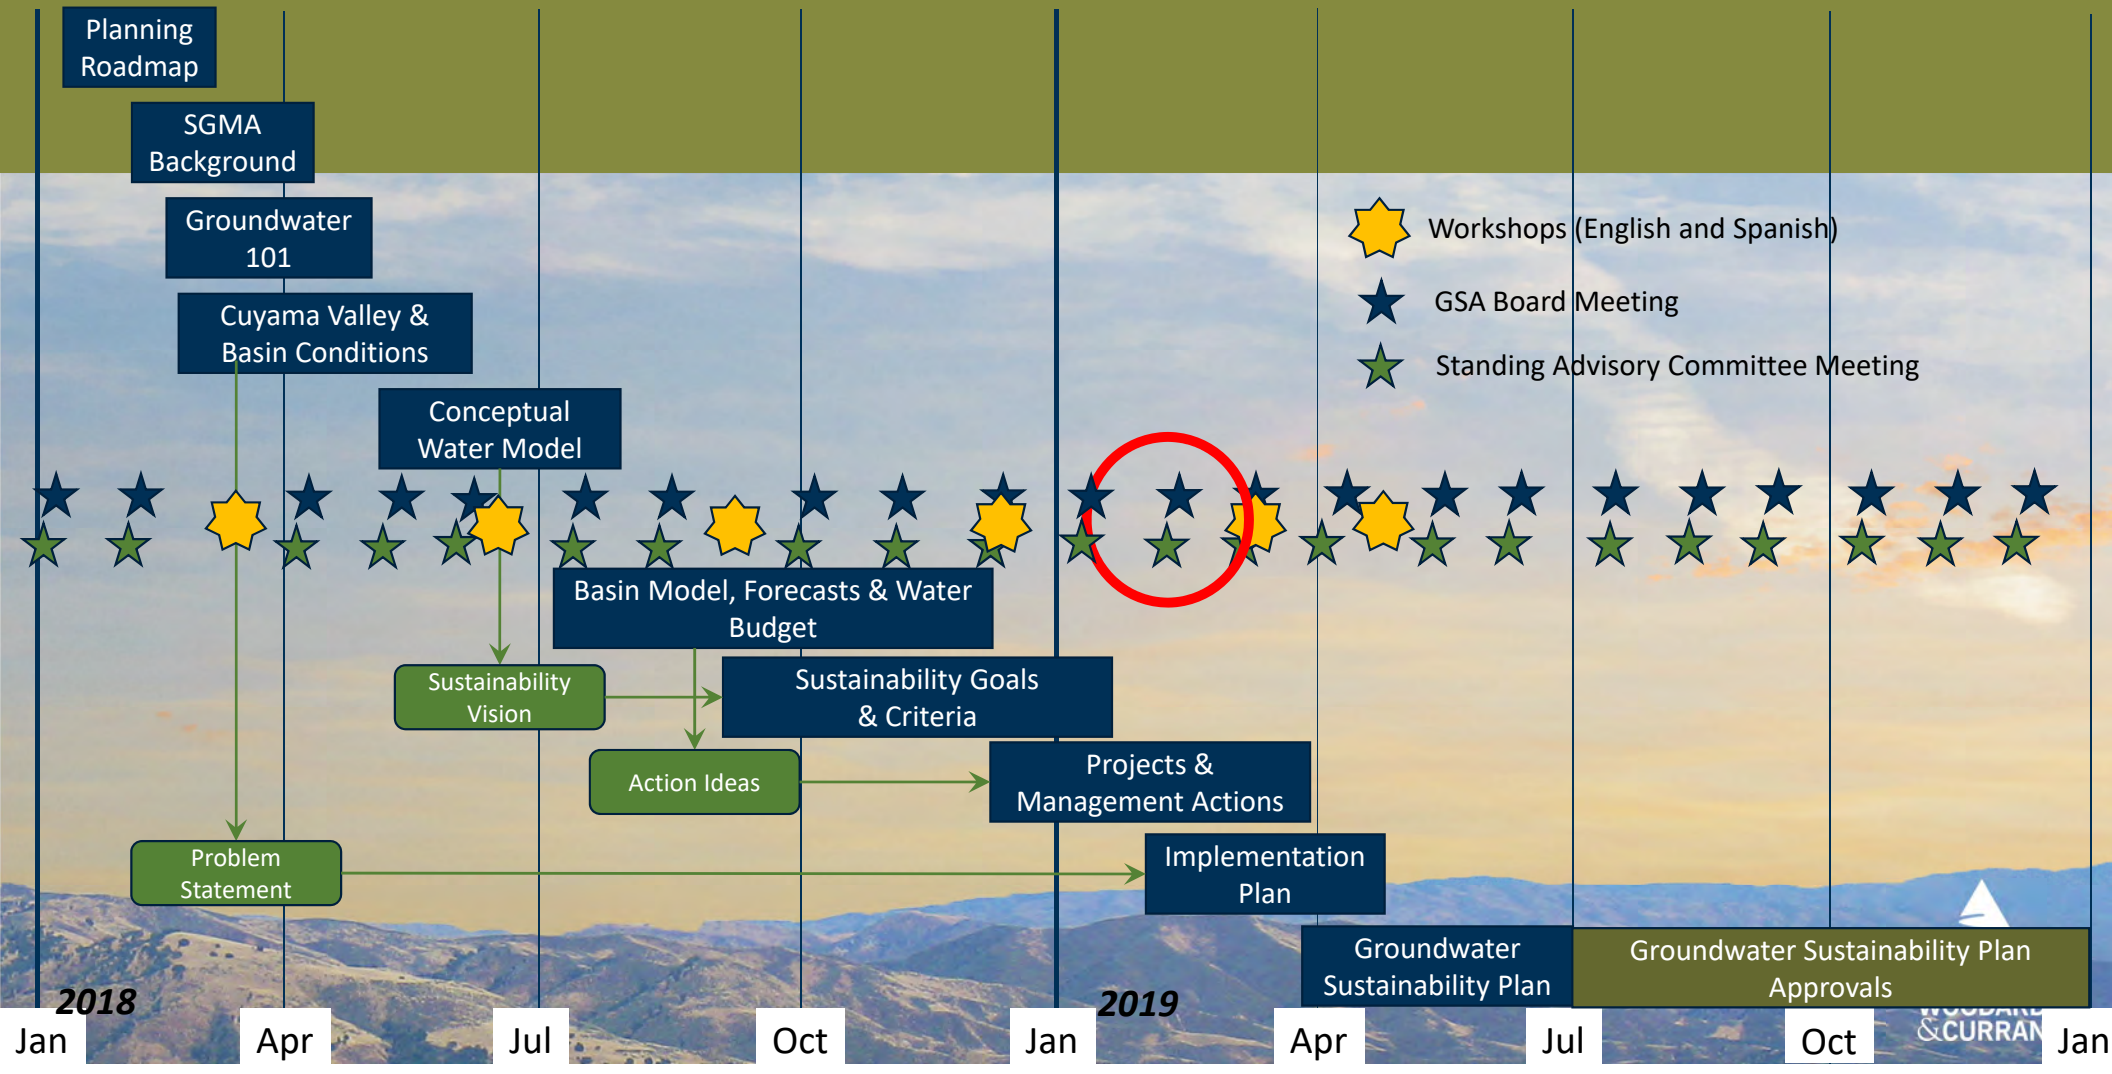

Update on Outreach Activities

- **Community Workshops Wednesday, March 6, 2019**
 - Update on Water Budget and Numerical Model
 - Projects and Management Actions
 - Implementation Plan
- **GSA Newsletter Distributed February 1**
 - Email to GSA contact list
 - With February-April 2019 Cuyama Recreation Center Newsletter



TO: Board of Directors
Agenda Item No. 8b

FROM: Jim Beck, Executive Director

DATE: February 6, 2019

SUBJECT: Progress & Next Steps

Issue

Report on the progress and next steps for Cuyama Basin Groundwater Sustainability Agency activities.

Recommended Motion

None – information only.

Discussion

A presentation on the progress and next steps for Cuyama Basin Groundwater Sustainability Agency activities is provided as Attachment 1.


Cuyama Basin Groundwater Sustainability Agency

Progress & Next Steps

February 6, 2019

Cuyama Basin Groundwater Sustainability Agency

Near-Term Schedule

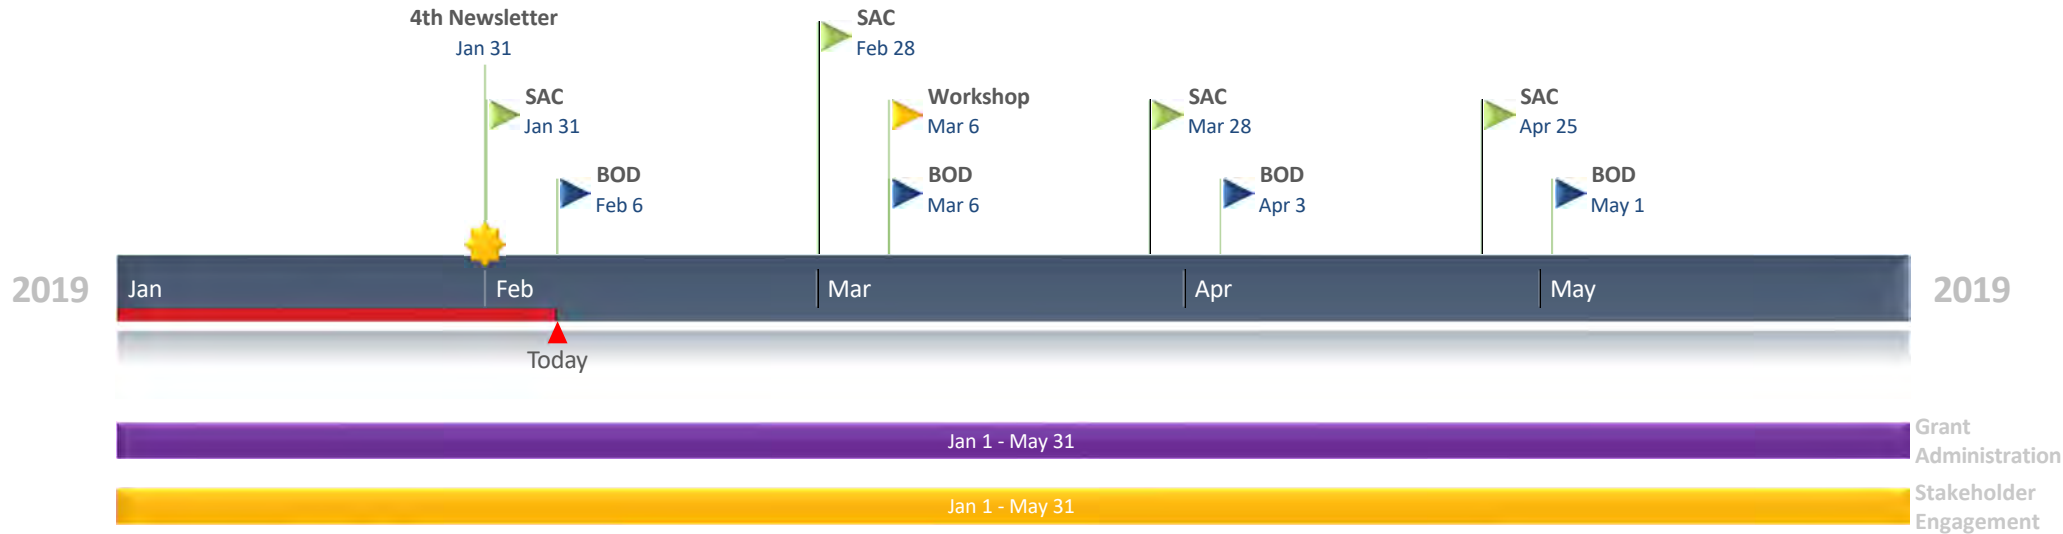

Dec 2018 Accomplishments & Next Steps

Accomplishments

- ✓ Continued facilitation of grant documentation
- ✓ Assisted with facilitating December 3rd Workshop

Next Steps

- Invoice DWR after receipt of grant admin agreement
- Update budget projections with GSP Consultant and begin planning for FY 2019-20 budget
- Plan for annual audit





TO: Board of Directors
Agenda Item No. 8ci

FROM: Joe Hughes, Legal Counsel

DATE: February 6, 2019

SUBJECT: Election of Officers

Issue

Election of Officers

Recommended Motion

Appoint a Chair, Vice Chair, Secretary, Auditor and Treasurer to serve during calendar year 2019.

Discussion

In accordance with the Cuyama Basin Groundwater Sustainability Agency (GSA) Joint Exercise of Powers Agreement (JEPA) Section 9.1, officers are to be appointed annually to serve the Board of Directors. The officers of the GSA may serve for multiple consecutive terms with no term limit and shall include a Chair, Vice Chair, Secretary, Auditor and Treasurer.

The 2018 Officers were as follows:

- Chair Derek Yurosek
- Vice Chair Lynn Compton
- Secretary Vacant
- Auditor Vacant
- Treasurer Vacant

The duties of the officers, as described in the JEPA, are included below:

- **Chair:** The Chair shall preside at all meeting of the Board of Directors.
- **Vice Chair:** The Vice Chair shall exercise all powers of the Chair in the Chair's absence or inability to act.
- **Secretary:** The Secretary shall keep minutes of the Board of Director meetings.
- **Auditor and Treasurer:** The Treasurer and Auditor shall perform such duties and responsibilities specified in Government Code Section 6505.5 and 6505.6. Section 6505.6 provides that the JEPA may appoint one of its officers or employees to either or both of such positions. The offices may be held by separate officers or employees or combined and held by one officer or employee.



TO: Board of Directors
Agenda Item No. 9a

FROM: Taylor Blakslee, Hallmark Group

DATE: February 6, 2019

SUBJECT: Financial Management Overview

Issue

Overview of the financial management for Cuyama Basin Groundwater Sustainability Agency activities.

Recommended Motion

None – information only.

Discussion

A presentation on the financial management for Cuyama Basin Groundwater Sustainability Agency activities is provided as Attachment 1.

Cuyama Basin Groundwater Sustainability Agency Financial Report


February 6, 2019

CBGSA OUTSTANDING INVOICES


Task	Invoiced Through	Cumulative Total
Legal Counsel	12/19/2018	\$18,335.00
Executive Director	12/31/2018	\$111,253.00
GSP Development	12/28/2018	\$942,148.00
TOTAL		\$1,071,736.00

Executive Director Task Order 1


Monthly Expenditures

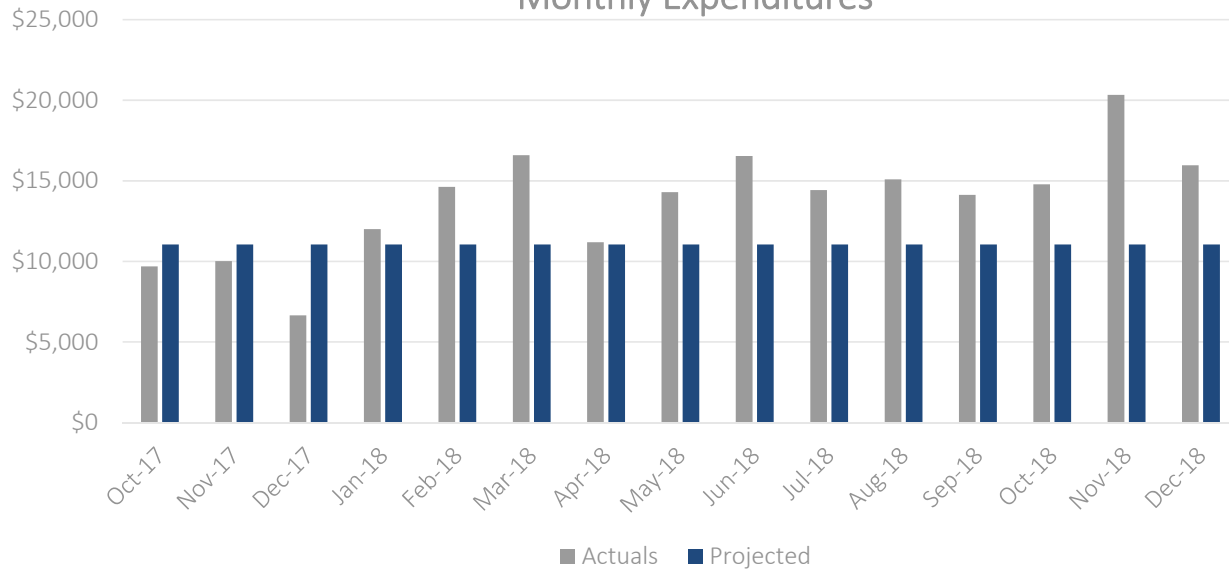


Progress Complete

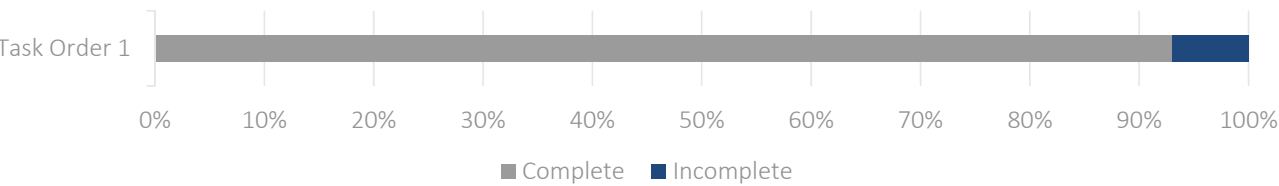

Total Authorized \$165,750
Through 12/31/2018

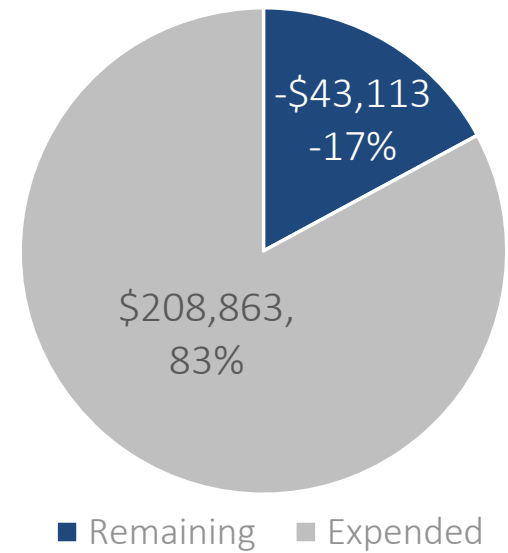


Task Order No. 1: Budget to Actual

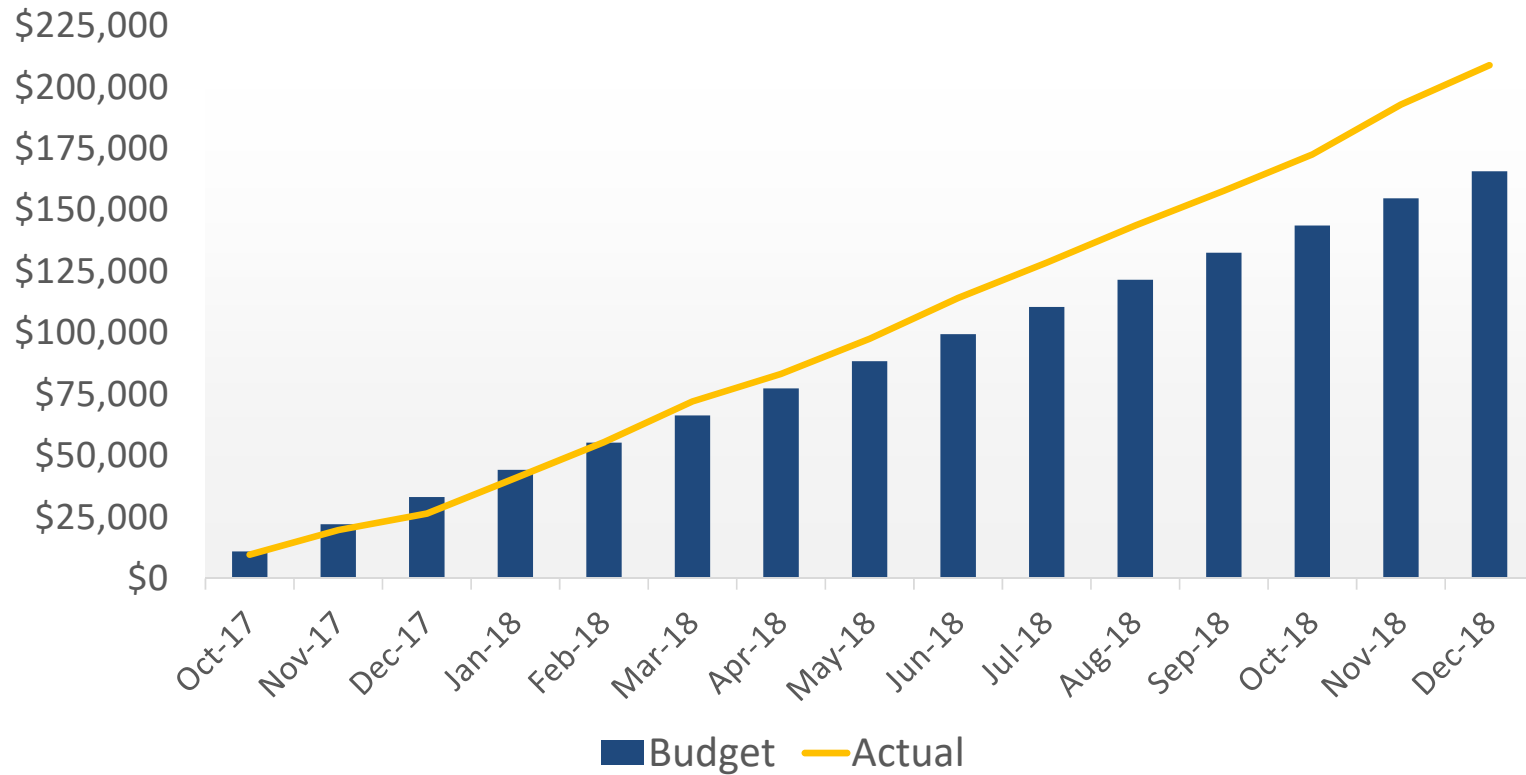


Executive Director Task Order 2, Amd1


Monthly Expenditures

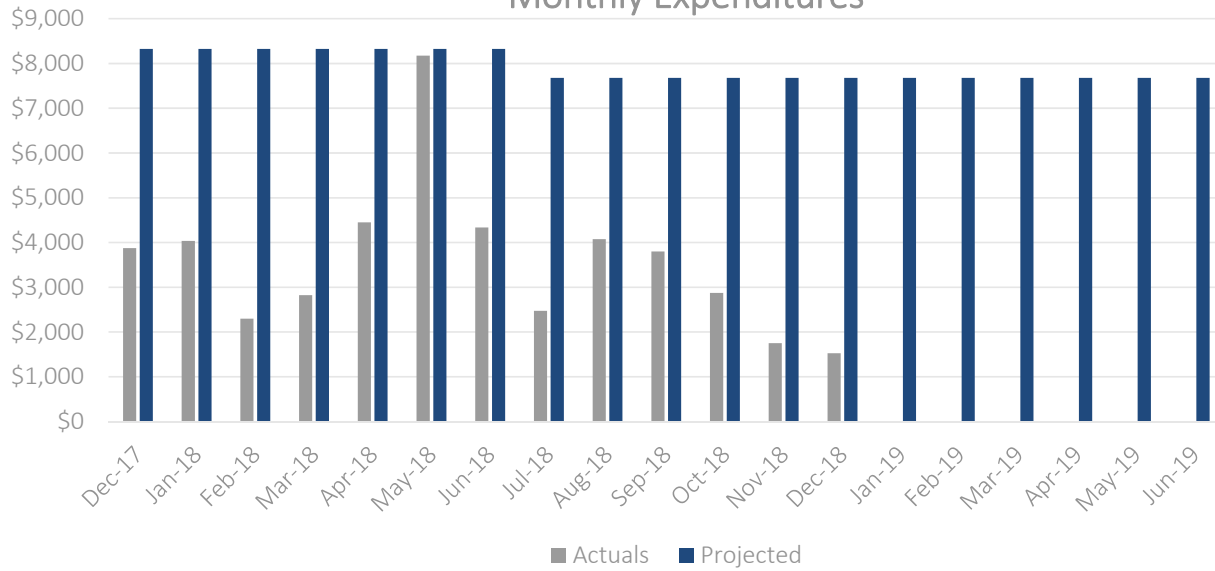


Total Authorized \$122,110
Through 6/30/2019

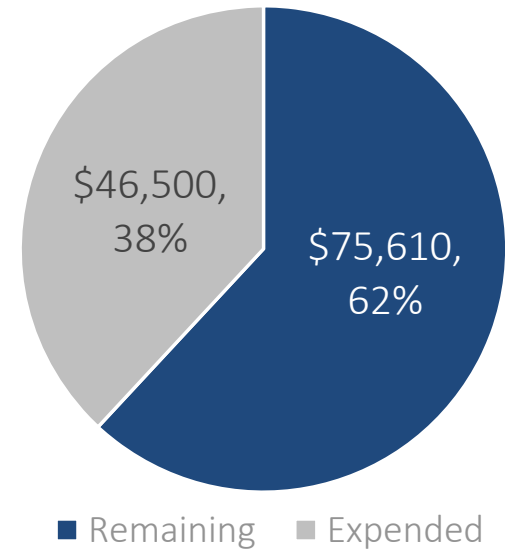


Progress Complete

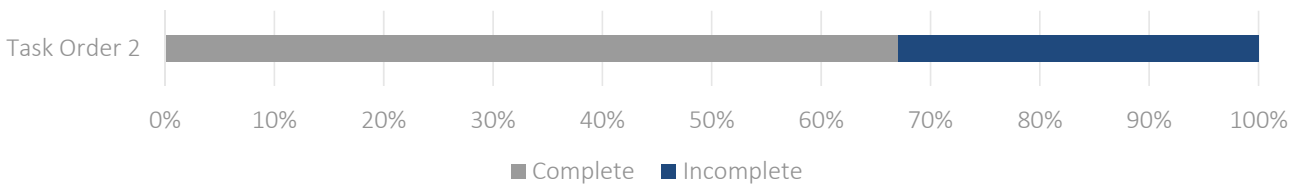


Task Order No. 2: Budget to Actual

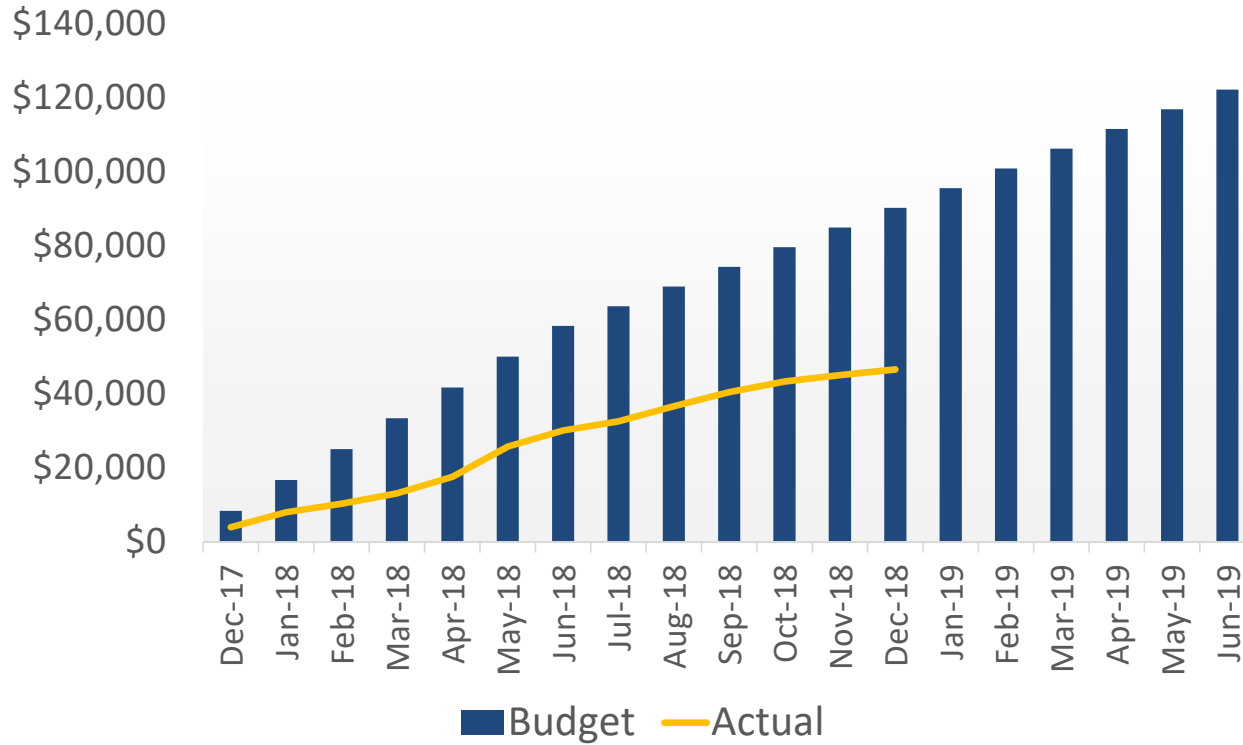

Task Order Nos. 1 & 2: Budget to Actual

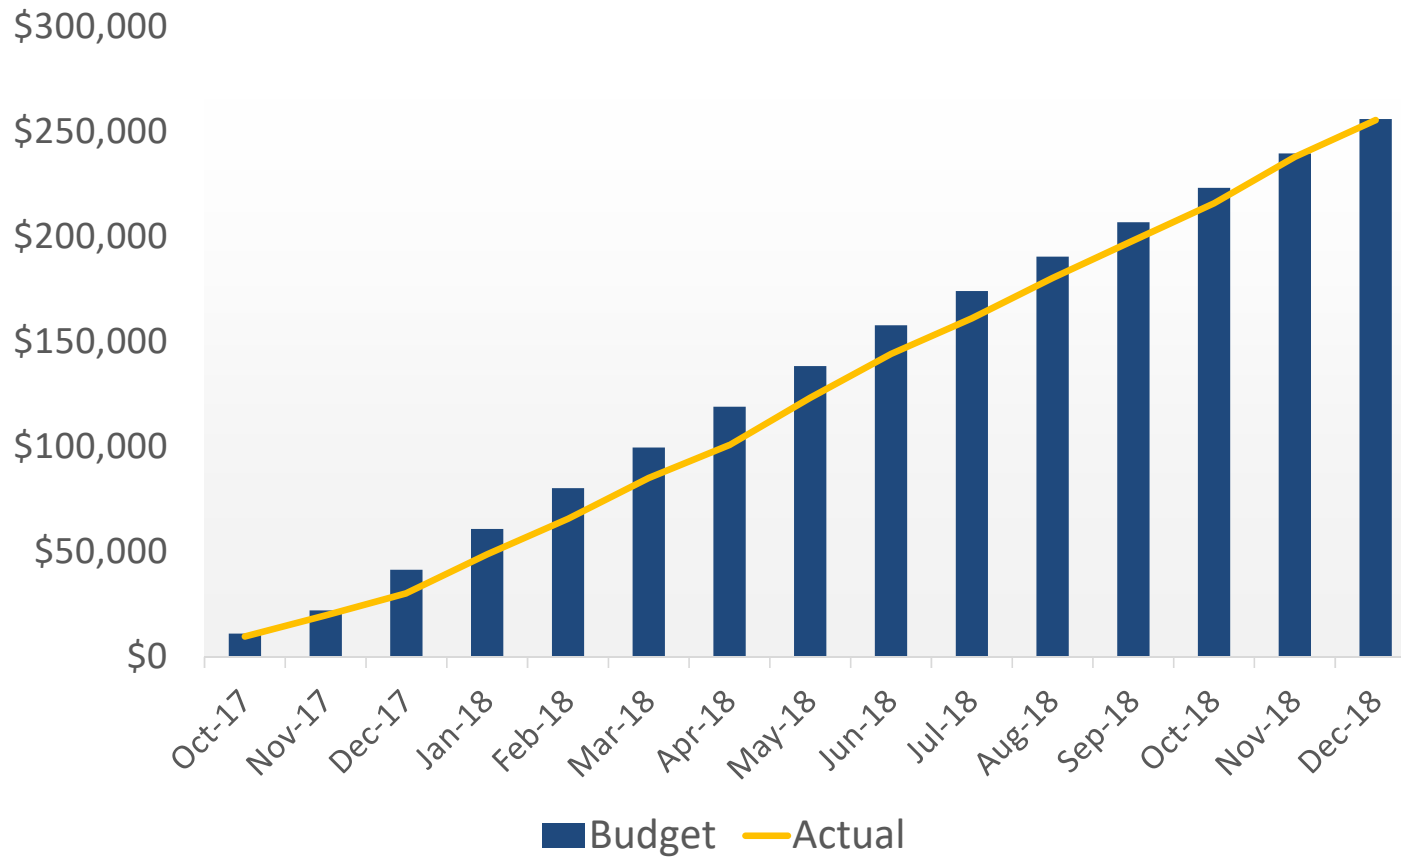


Legal Counsel: Budget to Actual (FY 18-19)

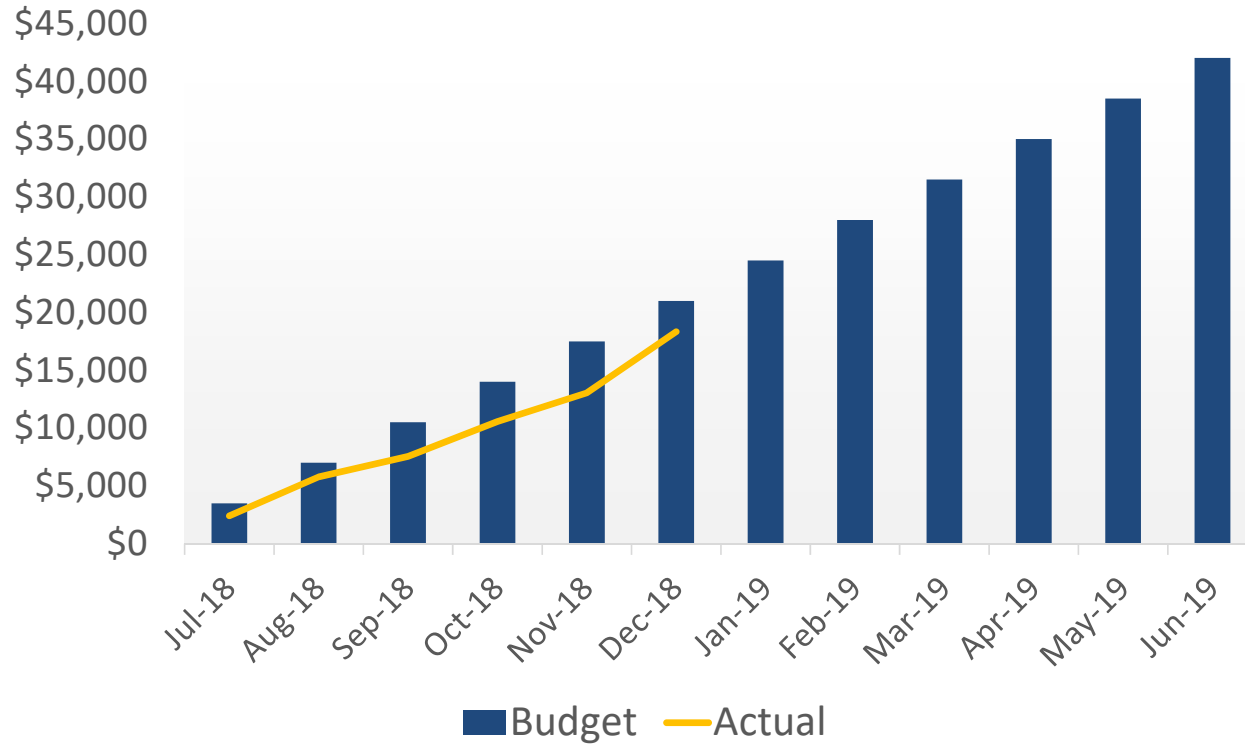


GSP Development Task Order 4


Monthly Expenditures

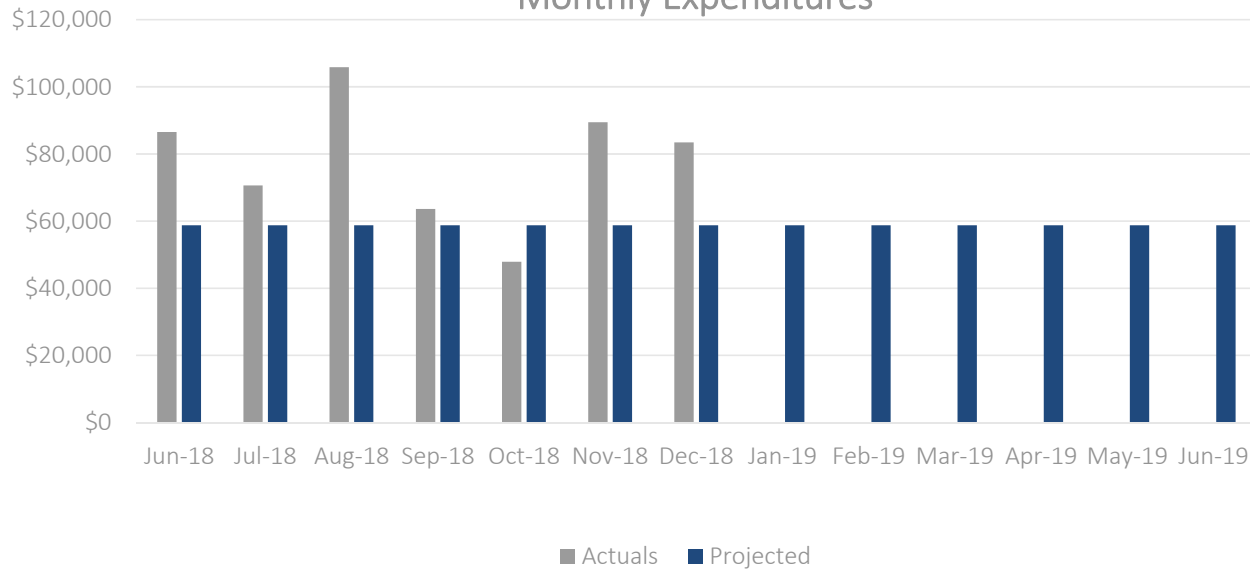

Progress Complete

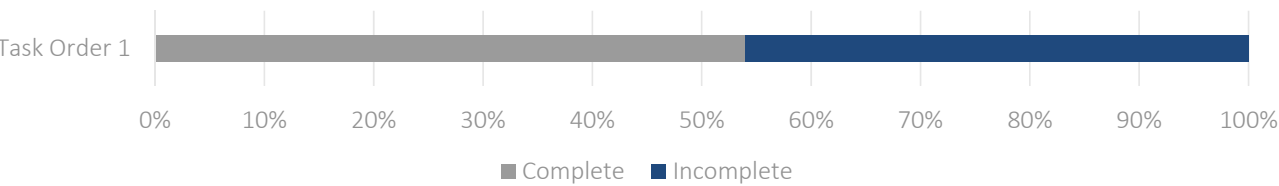


Total Authorized \$764,396
Through 6/30/2019

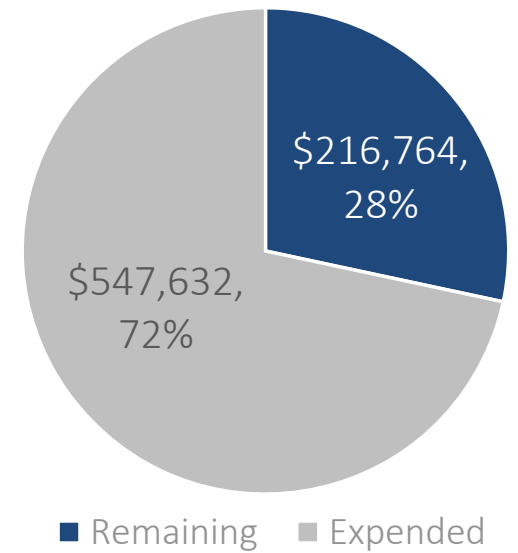


GSP Development Task Order 5


Monthly Expenditures

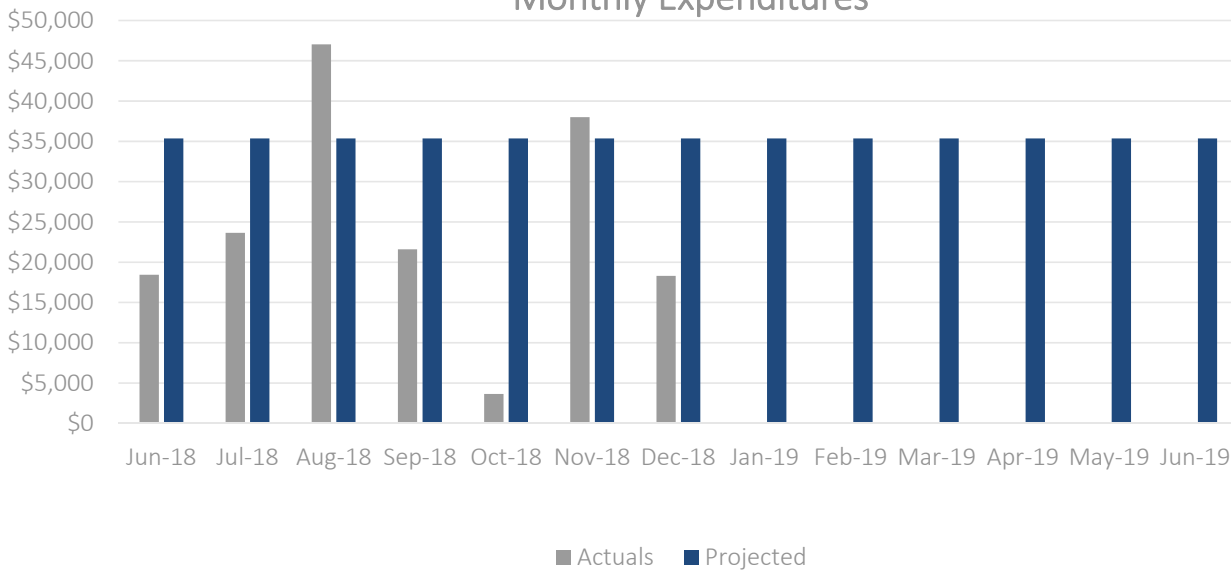


Total Authorized \$459,886
Through 6/30/2019

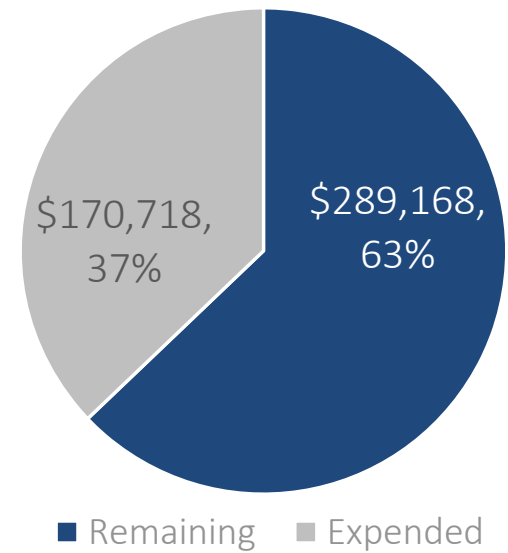

Progress Complete

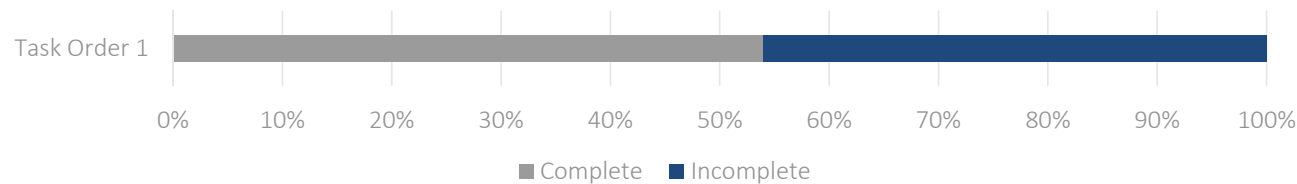

W&C Budget - Operational

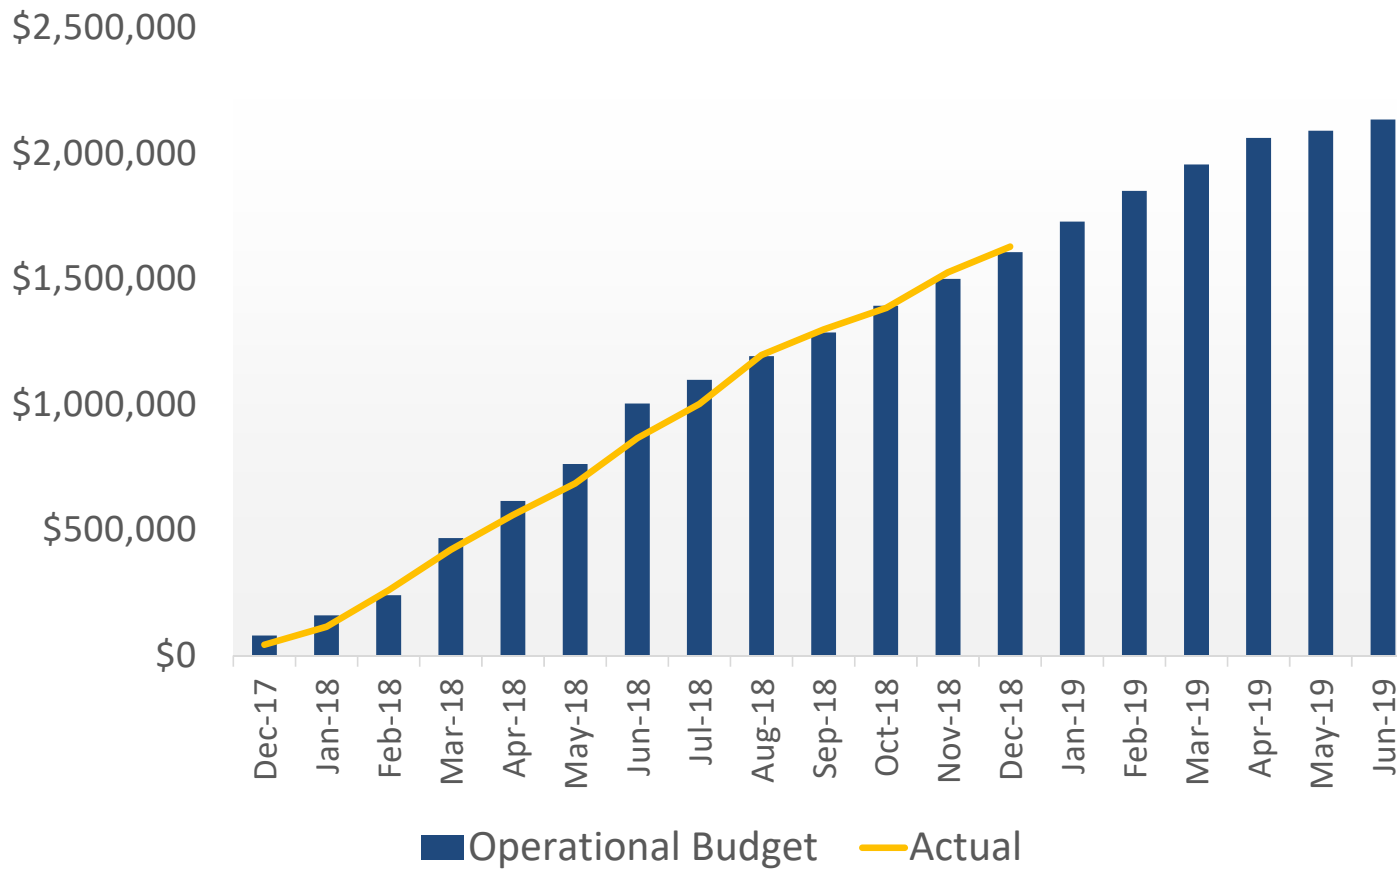



TO: Board of Directors
Agenda Item No. 9b

FROM: Taylor Blakslee, Hallmark Group

DATE: February 6, 2019

SUBJECT: Financial Report

Issue

Financial Report

Recommended Motion

None – information only.

Discussion

The Cuyama Basin Groundwater Sustainability Agency's fiscal year end financial report is provided as Attachment 1.

The report includes:

- Statement of Financial Position, *as of December 31, 2018*
- Receipts and Disbursements, *as of December 31, 2018*
- A/R Aging Summary, *as of December 31, 2018*
- A/P Aging Summary, *as of December 31, 2018*
- Statement of Operations with Budget Variance, *July through December 2018*
- 2018/2019 Operational Budget, *July 2018 through June 2019*

CUYAMA BASIN GSA
DECEMBER 31, 2018
FINANCIAL STATEMENTS

**To The Board of Directors
Cuyama Basin GSA**

The enclosed financial report for the period ended December 31, 2018 includes an adjustment to previously issued financial reports. An assessment invoice to Santa Barbara County Water Agency (SBCWA) totaling \$30,603 was adjusted to \$30,600 at the request of SBCWA pursuant to the agreement between SBCWA and DWR.

CUYAMA BASIN GSA
Statement of Financial Position
As of December 31, 2018

280

	<u>Dec 31, 18</u>
ASSETS	
Current Assets	
Checking/Savings	
Chase - General Checking	31,448
Total Checking/Savings	31,448
Accounts Receivable	
Accounts Receivable	77,487
Total Accounts Receivable	77,487
Total Current Assets	108,934
TOTAL ASSETS	<u>108,934</u>
LIABILITIES & EQUITY	
Liabilities	
Current Liabilities	
Accounts Payable	
Accounts Payable	1,071,736
Total Accounts Payable	1,071,736
Total Current Liabilities	1,071,736
Total Liabilities	1,071,736
Equity	
Unrestricted Net Assets	-110,130
Net Income	-852,671
Total Equity	-962,801
TOTAL LIABILITIES & EQUITY	<u>108,934</u>

CUYAMA BASIN GSA
Receipts and Disbursements
As of December 31, 2018

281

Type	Date	Num	Name	Debit	Credit
Chase - General Checking					
Payment	07/02/2018	11366440	County of Kern	38,567.66	
Payment	07/05/2018	1001819148	County of Ventura	18,451.08	
Payment	07/05/2018	1039	Cuyama Basin Water District	387,307.44	
Payment	07/09/2018	9706702	Santa Barbara County Water Agency	56,306.25	
Payment	07/16/2018	10575	Cuyama Community Services District	3,251.50	
Bill Pmt -Check	07/18/2018	1006	HGCPM, Inc.		80,730.24
Bill Pmt -Check	07/18/2018	1007	Klein, DeNatale, Goldner		18,598.06
Bill Pmt -Check	07/18/2018	1008	Woodard & Curran		394,461.11
Payment	08/31/2018	10615	Cuyama Community Services District	2,982.30	
Check	09/30/2018	Fees	Chase Bank		95.00
Check	10/31/2018	Fees	Chase Bank		95.00
Check	11/30/2018	Fees	Chase Bank		95.00
Check	12/13/2018	1009	Santa Barbara County Water Agency		3,718.75
Check	12/31/2018	Fees	Chase Bank		95.00
Total Chase - General Checking				506,866.23	497,888.16
TOTAL				506,866.23	497,888.16

CUYAMA BASIN GSA
A/R Aging Summary
As of December 31, 2018

282

	<u>Current</u>	<u>1 - 30</u>	<u>31 - 60</u>	<u>61 - 90</u>	<u>> 90</u>	<u>TOTAL</u>
County of San Luis Obispo	0	0	0	0	38,568	38,568
Santa Barbara County Water Agency	0	0	0	8,319	30,600	38,919
TOTAL	0	0	0	8,319	69,168	77,487

CUYAMA BASIN GSA
A/P Aging Summary
As of December 31, 2018

283

	<u>Current</u>	<u>1 - 30</u>	<u>31 - 60</u>	<u>61 - 90</u>	<u>> 90</u>	<u>TOTAL</u>
HGCPM, Inc.	17,497	22,081	17,662	17,934	36,078	111,253
Klein, DeNatale, Goldner	5,280	2,477	3,017	1,778	5,783	18,335
Woodard & Curran	101,806	227,619	0	101,772	510,950	942,148
TOTAL	<u>124,583</u>	<u>252,178</u>	<u>20,680</u>	<u>121,484</u>	<u>552,811</u>	<u>1,071,736</u>

CUYAMA BASIN GSA

284

Statement of Operations with Budget Variance

July through December 2018

	Jul - Dec 18	Budget	\$ Over Budget	% of Budget
Ordinary Income/Expense				
Income				
Direct Public Funds				
Grants	0	1,143,996	-1,143,996	0%
Participant Assessments	38,919	0	38,919	100%
Total Direct Public Funds	38,919	1,143,996	-1,105,077	3%
Total Income	38,919	1,143,996	-1,105,077	3%
Cost of Goods Sold				
Program Expenses				
Category/Component 1				
Monitoring/AMP Implementation	235,097	238,679	-3,582	98%
Grant Administration	0	4,368	-4,368	0%
Total Category/Component 1	235,097	243,047	-7,950	97%
Category/Component 2				
GSP Development	526,525	448,754	77,771	117%
Grant Administration	0	8,478	-8,478	0%
Total Category/Component 2	526,525	457,232	69,293	115%
Total Program Expenses	761,622	700,279	61,343	109%
Total COGS	761,622	700,279	61,343	109%
Gross Profit	-722,703	443,717	-1,166,420	-163%
Expense				
Administration and Operation				
Administrative Overhead				
Bank Service Fees	380	0	380	100%
Legal	18,335	21,000	-2,665	87%
Other Admin Expense	0	1,000	-1,000	0%
Postage and Mailing Services	0	10,000	-10,000	0%
Travel, Conferences, Trainings	0	2,500	-2,500	0%
Total Administrative Overhead	18,715	34,500	-15,785	54%
Staff and Administration of GSA				
Executive Director - TO1				
CBGSA Outreach	5,438	13,200	-7,763	41%
Consult Mgmt and GSP Devel	18,400	21,900	-3,500	84%
Financial Information Coord	6,738	5,100	1,638	132%
GSA BOD Meetings	60,888	26,100	34,788	233%
Total Executive Director - TO1	91,463	66,300	25,163	138%
Executive Director - TO2				
Budget Devel and Admin	125	0	125	100%
Financial Management	9,225	18,320	-9,095	50%
Outreach Facilitation	7,150	8,100	-950	88%
Travel and Direct Costs	3,290	1,410	1,880	233%
Total Executive Director - TO2	19,790	27,830	-8,040	71%
Total Staff and Administration of GSA	111,253	94,130	17,123	118%
Total Administration and Operation	129,968	128,630	1,338	101%
Total Expense	129,968	128,630	1,338	101%
Net Ordinary Income	-852,671	315,087	-1,167,758	-271%
Net Income	-852,671	315,087	-1,167,758	-271%

CUYAMA BASIN GSA
2018/2019 Operational Budget
 July 2018 through June 2019

285

	Jul '18 - Jun 19
Ordinary Income/Expense	
Income	
Direct Public Funds	
Grants	1,966,858
Total Direct Public Funds	1,966,858
Total Income	1,966,858
Cost of Goods Sold	
Program Expenses	
Category/Component 1	
Monitoring/AMP Implementation	472,989
Grant Administration	13,104
Total Category/Component 1	486,093
Category/Component 2	
GSP Development	889,032
Grant Administration	25,434
Total Category/Component 2	914,466
Total Program Expenses	1,400,559
Total COGS	1,400,559
Gross Profit	566,299
Expense	
Administration and Operation	
Administrative Overhead	
General Liability Insurance	12,108
Legal	42,000
Other Admin Expense	2,000
Postage and Mailing Services	20,000
Travel, Conferences, Trainings	5,000
Total Administrative Overhead	81,108
Staff and Administration of GSA	
Executive Director - TO1	
CBGSA Outreach	26,400
Consult Mgmt and GSP Devel	43,800
Financial Information Coor	10,200
GSA BOD Meetings	52,200
Total Executive Director - TO1	132,600
Executive Director - TO2	
Budget Devel and Admin	6,700
Financial Management	38,120
Outreach Facilitation	16,200
Travel and Direct Costs	2,820
Total Executive Director - TO2	63,840
Total Staff and Administration of GSA	196,440
Total Administration and Operation	277,548
Total Expense	277,548
Net Ordinary Income	288,751
Net Income	288,751



TO: Board of Directors
Agenda Item No. 9c

FROM: Taylor Blakslee, Hallmark Group

DATE: February 6, 2019

SUBJECT: Annual Insurance Coverage

Issue

Annual Insurance Coverage

Recommended Motion

Authorize annual insurance coverage with Walter Mortensen Insurance / INSURICA.

Discussion

The Cuyama Basin Groundwater Sustainability Agency (CBGSA) is responsible for providing insurance coverage to the Board of Directors. The CBGSA currently has a general liability and excess liability policy with Walter Mortensen Insurance / INSURICA effective April 1, 2018 to April 1, 2019.

Provided as Attachment 1 is the application to renew the insurance policy with Walter Mortensen Insurance / INSURICA to provide coverage through April 1, 2020.



**CALIFORNIA ASSOCIATION OF MUTUAL WATER COMPANIES
JOINT POWERS RISK AND INSURANCE MANAGEMENT AUTHORITY
(JPRIMA) SUPPLEMENTAL APPLICATION**



SECTION 1: GENERAL INFORMATION

Account Name:	
Mailing Address:	
Street Address:	
Effective Date:	Date Needed:
Expiring Premium: \$	Target Premium: \$
Incumbent Carrier:	
Submitting Agency:	
Mailing Address:	
Account Executive:	Email:
Phone:	FEIN:

SECTION 2: EXPIRING INFORMATION

Property: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Inland Marine: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Boiler & Machinery: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Crime: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ General Liability: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$	Public Officials: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ EPLI: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Auto: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Privacy / Cyber: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Excess: <input type="checkbox"/> Yes <input type="checkbox"/> No Premium: \$ Limit: \$
---	--

SECTION 3: EXPOSURE INFORMATION

1.	Type Of District/Utility: <input type="checkbox"/> Water / Sewer / Public Utility <input type="checkbox"/> Irrigation District <input type="checkbox"/> Reclamation / Drainage / Flood Control	<input type="checkbox"/> Resource / Soil Conservation <input type="checkbox"/> Community Services District <input type="checkbox"/> Other:
2.	Annual Budget:	\$
3.	Payroll	\$
	Field Payroll:	\$
	Sewer / Water Treatment Plant Payroll:	\$
4.	Miles of Irrigation Ditch:	
5.	Number of Hook-Ups:	
6.	Population Served:	
7.	Total Number of: Full-Time Employees:	Board Members: Terms of Board Members:
8.	How long have the Board Members and Management Team Been in Place?	

SECTION 4: CLAIMS* – PLEASE PROVIDE FIVE YEAR CURRENTLY VALUED LOSS RUNS
 *All "Yes" answers must include an explanation in Section 9. NOTES or via separate attachment.

1.	Any Claims over \$25,000 in the Past Five Years?	<input type="checkbox"/> Yes <input type="checkbox"/> No
2.	Any Contaminated Well Sites or Water Sources in the Last Five Years?	<input type="checkbox"/> Yes <input type="checkbox"/> No
3.	Any Flood Losses in the Last 10 Years?	<input type="checkbox"/> Yes <input type="checkbox"/> No
4.	Any Perchlorate Incidents in the Last Five Years?	<input type="checkbox"/> Yes <input type="checkbox"/> No
5.	Any Pollution Incidents in the Last Five Years?	<input type="checkbox"/> Yes <input type="checkbox"/> No



CALIFORNIA ASSOCIATION OF MUTUAL WATER COMPANIES
JOINT POWERS RISK AND INSURANCE MANAGEMENT AUTHORITY
(JPRIMA) SUPPLEMENTAL APPLICATION



SECTION 5: GENERAL QUESTIONS

1. Are Certificates of Insurance Required from your Subcontractors?
2. Are you Named as an Additional Insured on your Subcontractor's Liability Policies?
3. Do you Use or Operate any of the Following in Your Operations?
4. Are you Responsible for:
5. Are you Responsible for:
6. Are you Responsible for:
7. Do you Operate any Pumps with Horsepower > 1,000?
8. Do you Operate any Hydroelectric or Other Electric Generation Devices?
9. Do you Sell or Provide any Other Utilities?
10. Do you Currently have any Property in the "Course of Construction" or Plan to have any New Additions, Renovations, or Expansions?
11. Do you Purchase Workers Compensation Insurance?
12. Have you ever Experienced any Property Losses resulting from Subsidence?
13. Do have an active Fleet Safety Program that includes Regular MVR Employee Checks?
14. Are you aware of any Incidents or Circumstances, which might give rise to a Claim under this Policy? If yes, Please Describe:

Claims(s) arising from any Facts, Circumstances, or Situations Mentioned in Question 14 above are Excluded from Coverage.

SECTION 6: EMPLOYMENT PRACTICES

1. Desired Deductible: \$1,000 \$2,500 \$5,000 \$10,000 Other: \$
2. Total Number Of Employees, excluding Directors and Officers (All Locations):
3. Annual Employee Turnover Rate for Last Year?
4. How Many Employees Have Been Involuntarily Terminated In The Past Year?
5. Have any EEOC or NLRB Charges, State or Local Judgments, or Demand Letters from Proposed, Current or Former Employees or their Attorneys been received by the Applicant In the Past Five Years?
6. Have you had any Lawsuits, Mediations, Arbitrations, Negotiated Settlements entered into with any Proposed, Current, or Former Employee of the Applicant in the Past Five Years?

Claims(s) arising from any Facts, Circumstances, or Situations Mentioned in Questions 5.or .6, above are Excluded from Coverage.



**CALIFORNIA ASSOCIATION OF MUTUAL WATER COMPANIES
JOINT POWERS RISK AND INSURANCE MANAGEMENT AUTHORITY
(JPRIMA) SUPPLEMENTAL APPLICATION**



SECTION 7: HUMAN RESOURCES		
1.	Do you Have a Full Time Human Resource Coordinator?	<input type="checkbox"/> Yes <input type="checkbox"/> No
2.	Do you Have a Written Annual Employee Evaluation?	<input type="checkbox"/> Yes <input type="checkbox"/> No
3.	Do you Have a Written Grievance Procedure in Place?	<input type="checkbox"/> Yes <input type="checkbox"/> No
4.	Do you Have a Written Employee Handbook?	<input type="checkbox"/> Yes <input type="checkbox"/> No
5.	Do you Have a Written EEOC Guideline in Place?	<input type="checkbox"/> Yes <input type="checkbox"/> No
6.	Do you Have a Formal Outreach Program For Terminated / Laid Off Employees?	<input type="checkbox"/> Yes <input type="checkbox"/> No
7.	Do All Employees Receive Training in the Proper Implementation of your Human Resource Policies & Procedures?	<input type="checkbox"/> Yes <input type="checkbox"/> No
8.	Do you Use Outside Counsel for Employment Advice?	<input type="checkbox"/> Yes <input type="checkbox"/> No
9.	Do you have the following Written Policies?	
	■ Anti-Sexual Harassment:	<input type="checkbox"/> Yes <input type="checkbox"/> No
	■ Anti-Sexual Harassment (Non-Sexual):	<input type="checkbox"/> Yes <input type="checkbox"/> No
	■ Family Medical Leave:	<input type="checkbox"/> Yes <input type="checkbox"/> No
10.	Do your Anti-Harassment Policies Provide?	
	■ Confidential Reporting Process:	<input type="checkbox"/> Yes <input type="checkbox"/> No
	■ Protection For Employees Making a Complaint:	<input type="checkbox"/> Yes <input type="checkbox"/> No
	■ An Alternative Reporting of Allegations:	<input type="checkbox"/> Yes <input type="checkbox"/> No

SECTION 8: PLEASE PROVIDE THE FOLLOWING:	
1.	ACORD Applications – Including SOV, Equipment Schedule, Auto Schedule – CN / VIN / GVW / Radius and Driver List
2.	Five Year Currently Valued Loss Runs
3.	Verification of Underlying Employers' Liability Limits (Minimum Limits are \$500K / \$500K / \$500K)
4.	MVRs (If Applicable)
5.	Dam Questionnaire (If Applicable)

SECTION 9: NOTES:

I have reviewed this application for accuracy before signing it. As a condition precedent to coverage, I hereby state that the information contained herein is true, accurate, and complete and that no material facts have been omitted, misrepresented, or misstated. I know of no other claims or lawsuits against the Applicant, and I know of no other events, incidents, or occurrences which might reasonably lead to a claim or lawsuit against the Applicant. I understand that this is an application for insurance only and that completion and submission of this application does not bind coverage with any insurer.

GENERAL FRAUD WARNING NOTICE

Any person who knowingly and with intent to defraud any insurance company or another person files an application for insurance or statement of claim containing any materially false information, or conceals for the purpose of misleading, information concerning any fact material thereto, commits a fraudulent act, which is a crime and may subject the person to criminal and civil penalties.

Applicant Signature: _____ **(Date)** _____

Broker Signature: _____ **(Date)** _____



**CALIFORNIA ASSOCIATION OF MUTUAL WATER COMPANIES
JOINT POWERS RISK AND INSURANCE MANAGEMENT AUTHORITY
(JPRIMA) SUPPLEMENTAL APPLICATION**



DAM-QUESTIONNAIRE

NOTE: If the entity maintains more than one dam, a separate questionnaire must be completed for each structure.
MANDATORY: Please forward copies of latest inspection reports.

1.	Name of Structure:		
	Address:		
2.	Year Built:		
3.	Built Under the Direction of: <input type="checkbox"/> Entity <input type="checkbox"/> Bureau of Reclamation <input type="checkbox"/> Dept. of Agriculture <input type="checkbox"/> Dept. of Interior <input type="checkbox"/> Corp of Engineers <input type="checkbox"/> Other		
4.	Purpose (Check All Applicable): <input type="checkbox"/> Flood <input type="checkbox"/> Irrigation <input type="checkbox"/> Water Supply <input type="checkbox"/> Industrial <input type="checkbox"/> Power		
5.	Construction: <input type="checkbox"/> Concrete <input type="checkbox"/> Earth <input type="checkbox"/> Steel Sheet <input type="checkbox"/> Other		
6.	Dimensions: Acre / Feet:	Top Width:	Storage Capacity:
	Height:	Base Width:	
7.	How Frequently is the Dam Inspected?		By Whom?
	<ul style="list-style-type: none"> ■ Has Risk Been Included Under the National Program for Dam Inspection? <input type="checkbox"/> Yes <input type="checkbox"/> No 		
8.	Name of Tributary Rivers of Impoundment Waters: Upstream		Downstream
9.	How is the Water Level Controlled? <input type="checkbox"/> Gates <input type="checkbox"/> Spillway <input type="checkbox"/> Other		
	<ul style="list-style-type: none"> ■ If Gates, What Type? ■ How are Gates Operated? <input type="checkbox"/> Manually <input type="checkbox"/> Automatically 		
10.	Upstream Exposures - Are there Exposures to any of the following:		
	<ul style="list-style-type: none"> ■ Structures <input type="checkbox"/> Yes <input type="checkbox"/> No ■ Industrial Complexes <input type="checkbox"/> Yes <input type="checkbox"/> No ■ Housing <input type="checkbox"/> Yes <input type="checkbox"/> No 	If yes, Please Describe (Be Specific: Include Distances, etc...)	
	<ul style="list-style-type: none"> ■ Recreational Areas (Swimming, Boating, Camping, etc...) 	<input type="checkbox"/> Yes <input type="checkbox"/> No	
	<ul style="list-style-type: none"> ■ If yes, Please Describe (Be Specific: Include Distances, etc...) 		
11.	Downstream Exposures – Must Be Completed for All Items Listed Below:		
	<input type="checkbox"/> Housing	Distance:	Description:
	<input type="checkbox"/> Other Structures	Distance:	Description:
	<input type="checkbox"/> Industrial Complexes	Distance:	Description:
	<input type="checkbox"/> Pumping Stations	Distance:	Description:
	<input type="checkbox"/> Bridges	Distance:	Description:
	<ul style="list-style-type: none"> ■ Description: 		
	<input type="checkbox"/> Highways	Distance:	Description:
	<ul style="list-style-type: none"> ■ Description: (Interstate, State Route, Country Road, Paved, Unpaved, etc...) 		
	<input type="checkbox"/> Agricultural Areas	Distance:	Description:
	<ul style="list-style-type: none"> ■ Is there Exposure to: Livestock: <input type="checkbox"/> Yes <input type="checkbox"/> No 	Crops: <input type="checkbox"/> Yes <input type="checkbox"/> No	
		Dwellings: <input type="checkbox"/> Yes <input type="checkbox"/> No	Barns & Sheds: <input type="checkbox"/> Yes <input type="checkbox"/> No
	<input type="checkbox"/> Recreational Areas	Distance:	Description:



COMMERCIAL INSURANCE APPLICATION
APPLICANT INFORMATION SECTION

MHERNANDEZ

DATE (MM/DD/YYYY)
11/26/2018

AGENCY Walter Mortensen Insurance / INSURICA 126 N. Main Street Porterville, CA 93257		CARRIER		NAIC CODE N/A
		COMPANY POLICY OR PROGRAM NAME		PROGRAM CODE
		POLICY NUMBER		
CONTACT NAME: Lloyd Turner		UNDERWRITER		UNDERWRITER OFFICE
PHONE (A/C, No, Ext): (559) 781-5200				
FAX (A/C, No): (559) 781-3229		STATUS OF TRANSACTION		
E-MAIL ADDRESS:		QUOTE <input type="checkbox"/> ISSUE POLICY <input checked="" type="checkbox"/> RENEW <input type="checkbox"/>		
CODE:		BOUND (Give Date and/or Attach Copy):		
SUBCODE:		CHANGE DATE TIME <input type="checkbox"/> AM <input type="checkbox"/> PM		
AGENCY CUSTOMER ID: CUYABAS-01		License # 0D44424		

SECTIONS ATTACHED

INDICATE SECTIONS ATTACHED	PREMIUM		PREMIUM		PREMIUM
<input type="checkbox"/> ACCOUNTS RECEIVABLE / VALUABLE PAPERS	\$		ELECTRONIC DATA PROC	\$	TRANSPORTATION / MOTOR TRUCK CARGO
<input type="checkbox"/> BOILER & MACHINERY	\$		EQUIPMENT FLOATER	\$	TRUCKERS / MOTOR CARRIER
<input type="checkbox"/> BUSINESS AUTO	\$		GARAGE AND DEALERS	\$	UMBRELLA
<input type="checkbox"/> BUSINESS OWNERS	\$		GLASS AND SIGN	\$	YACHT
<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY	\$		INSTALLATION / BUILDERS RISK	\$	
<input type="checkbox"/> CRIME	\$		OPEN CARGO	\$	
<input type="checkbox"/> DEALERS	\$		PROPERTY	\$	

ATTACHMENTS

<input type="checkbox"/> ADDITIONAL INTEREST	<input type="checkbox"/> PREMIUM PAYMENT SUPPLEMENT
<input type="checkbox"/> ADDITIONAL PREMISES	<input type="checkbox"/> PROFESSIONAL LIABILITY SUPPLEMENT
<input type="checkbox"/> APARTMENT BUILDING SUPPLEMENT	<input type="checkbox"/> RESTAURANT / TAVERN SUPPLEMENT
<input type="checkbox"/> CONDO ASSN BYLAWS (for D&O Coverage only)	<input type="checkbox"/> STATEMENT / SCHEDULE OF VALUES
<input type="checkbox"/> CONTRACTORS SUPPLEMENT	<input type="checkbox"/> STATE SUPPLEMENT (If applicable)
<input type="checkbox"/> COVERAGES SCHEDULE	<input type="checkbox"/> VACANT BUILDING SUPPLEMENT
<input type="checkbox"/> DRIVER INFORMATION SCHEDULE	<input type="checkbox"/> VEHICLE SCHEDULE
<input type="checkbox"/> INTERNATIONAL LIABILITY EXPOSURE SUPPLEMENT	
<input type="checkbox"/> INTERNATIONAL PROPERTY EXPOSURE SUPPLEMENT	
<input type="checkbox"/> LOSS SUMMARY	

POLICY INFORMATION

PROPOSED EFF DATE 04/01/2019	PROPOSED EXP DATE 04/01/2020	BILLING PLAN <input type="checkbox"/> DIRECT <input type="checkbox"/> AGENCY	PAYMENT PLAN	METHOD OF PAYMENT	AUDIT	DEPOSIT \$	MINIMUM PREMIUM \$	POLICY PREMIUM \$
--	--	---	--------------	-------------------	-------	---------------	-----------------------	----------------------

APPLICANT INFORMATION

NAME (First Named Insured) AND MAILING ADDRESS (including ZIP+4) Cuyama Basin Groundwater Sustainability Agency 4900 California Ave., Tower B, Second Floor Bakersfield, CA 93309		GL CODE	SIC	NAICS	FEIN OR SOC SEC # 82-3307328
		BUSINESS PHONE #: (661) 477-3385			
		WEBSITE ADDRESS www.cuyamabasin.org			
<input type="checkbox"/> CORPORATION	<input type="checkbox"/> JOINT VENTURE	<input type="checkbox"/> NOT FOR PROFIT ORG	<input checked="" type="checkbox"/> SUBCHAPTER "S" CORPORATION Groundwater Sustainability Agency		
<input type="checkbox"/> INDIVIDUAL	<input type="checkbox"/> LLC NO. OF MEMBERS AND MANAGERS: _____	<input type="checkbox"/> PARTNERSHIP	<input type="checkbox"/> TRUST		
NAME (Other Named Insured) AND MAILING ADDRESS (including ZIP+4)		GL CODE	SIC	NAICS	FEIN OR SOC SEC #
		BUSINESS PHONE #:			
		WEBSITE ADDRESS			
<input type="checkbox"/> CORPORATION	<input type="checkbox"/> JOINT VENTURE	<input type="checkbox"/> NOT FOR PROFIT ORG	<input type="checkbox"/> SUBCHAPTER "S" CORPORATION		
<input type="checkbox"/> INDIVIDUAL	<input type="checkbox"/> LLC NO. OF MEMBERS AND MANAGERS: _____	<input type="checkbox"/> PARTNERSHIP	<input type="checkbox"/> TRUST		
NAME (Other Named Insured) AND MAILING ADDRESS (including ZIP+4)		GL CODE	SIC	NAICS	FEIN OR SOC SEC #
		BUSINESS PHONE #:			
		WEBSITE ADDRESS			
<input type="checkbox"/> CORPORATION	<input type="checkbox"/> JOINT VENTURE	<input type="checkbox"/> NOT FOR PROFIT ORG	<input type="checkbox"/> SUBCHAPTER "S" CORPORATION		
<input type="checkbox"/> INDIVIDUAL	<input type="checkbox"/> LLC NO. OF MEMBERS AND MANAGERS: _____	<input type="checkbox"/> PARTNERSHIP	<input type="checkbox"/> TRUST		

CONTACT INFORMATION

CONTACT TYPE:				CONTACT TYPE:			
CONTACT NAME: Taylor Blakslee				CONTACT NAME:			
PRIMARY PHONE #	<input type="checkbox"/> HOME <input type="checkbox"/> BUS <input checked="" type="checkbox"/> CELL	SECONDARY PHONE #	<input type="checkbox"/> HOME <input type="checkbox"/> BUS <input type="checkbox"/> CELL	PRIMARY PHONE #	<input type="checkbox"/> HOME <input type="checkbox"/> BUS <input type="checkbox"/> CELL	SECONDARY PHONE #	<input type="checkbox"/> HOME <input type="checkbox"/> BUS <input type="checkbox"/> CELL
661-477-3385							
PRIMARY E-MAIL ADDRESS: tblakslee@hgcpm.com				PRIMARY E-MAIL ADDRESS:			
SECONDARY E-MAIL ADDRESS:				SECONDARY E-MAIL ADDRESS:			

PREMISES INFORMATION (Attach ACORD 823 for Additional Premises)

LOC #	STREET	CITY LIMITS	INTEREST	# FULL TIME EMPL	ANNUAL REVENUES: \$
1	4900 California Ave., Tower B, Second Floor	<input type="checkbox"/> INSIDE	<input type="checkbox"/> OWNER		OCCUPIED AREA: SQ FT
BLD #	CITY: Bakersfield	STATE: CA	<input type="checkbox"/> TENANT	# PART TIME EMPL	OPEN TO PUBLIC AREA: SQ FT
1	COUNTY:	ZIP: 93309			TOTAL BUILDING AREA: SQ FT
DESCRIPTION OF OPERATIONS:					ANY AREA LEASED TO OTHERS? Y / N

NATURE OF BUSINESS

<input type="checkbox"/> APARTMENTS	<input type="checkbox"/> CONTRACTOR	<input type="checkbox"/> MANUFACTURING	<input type="checkbox"/> RESTAURANT	<input type="checkbox"/> SERVICE	<input checked="" type="checkbox"/> Groundwater Sustainability Agency	DATE BUSINESS STARTED (MM/DD/YYYY)
<input type="checkbox"/> CONDOMINIUMS	<input type="checkbox"/> INSTITUTIONAL	<input type="checkbox"/> OFFICE	<input type="checkbox"/> RETAIL	<input type="checkbox"/> WHOLESALE		

DESCRIPTION OF PRIMARY OPERATIONS

RETAIL STORES OR SERVICE OPERATIONS % OF TOTAL SALES:	INSTALLATION, SERVICE OR REPAIR WORK %	OFF PREMISES INSTALLATION, SERVICE OR REPAIR WORK %
---	--	---

DESCRIPTION OF OPERATIONS OF OTHER NAMED INSURED

ADDITIONAL INTEREST (Not all fields apply to all scenarios - provide only the necessary data) Attach ACORD 45 for more Additional Interests

INTEREST <input type="checkbox"/> ADDITIONAL INSURED <input type="checkbox"/> BREACH OF WARRANTY <input type="checkbox"/> CO-OWNER <input type="checkbox"/> EMPLOYEE AS LESSOR <input type="checkbox"/> LEASEBACK OWNER <input type="checkbox"/> LIENHOLDER <input type="checkbox"/> LOSS PAYEE <input type="checkbox"/> MORTGAGEE <input type="checkbox"/> OWNER <input type="checkbox"/> REGISTRANT <input type="checkbox"/> TRUSTEE	NAME AND ADDRESS	RANK:	EVIDENCE:	CERTIFICATE	POLICY	SEND BILL	INTEREST IN ITEM NUMBER	
							LOCATION:	BUILDING:
							VEHICLE:	BOAT:
							AIRPORT:	AIRCRAFT:
							ITEM CLASS:	ITEM:
						ITEM DESCRIPTION		
REASON FOR INTEREST:				REFERENCE / LOAN #:		INTEREST END DATE:		
				LIEN AMOUNT:		PHONE (A/C, No, Ext):		FAX (A/C, No):
				E-MAIL ADDRESS:				

GENERAL INFORMATION

EXPLAIN ALL "YES" RESPONSES				Y / N
1a. IS THE APPLICANT A SUBSIDIARY OF ANOTHER ENTITY ?				N
<input type="text" value="PARENT COMPANY NAME"/>	<input type="text" value="RELATIONSHIP DESCRIPTION"/>	<input type="text" value="% OWNED"/>		
1b. DOES THE APPLICANT HAVE ANY SUBSIDIARIES?				N
<input type="text" value="SUBSIDIARY COMPANY NAME"/>	<input type="text" value="RELATIONSHIP DESCRIPTION"/>	<input type="text" value="% OWNED"/>		
2. IS A FORMAL SAFETY PROGRAM IN OPERATION?				N
<input type="checkbox"/> SAFETY MANUAL	<input type="checkbox"/> MONTHLY MEETINGS	<input type="checkbox"/>		
<input type="checkbox"/> SAFETY POSITION	<input type="checkbox"/> OSHA			
3. ANY EXPOSURE TO FLAMMABLES, EXPLOSIVES, CHEMICALS?				N
4. ANY OTHER INSURANCE WITH THIS COMPANY? (List policy numbers)				N
<input type="text" value="LINE OF BUSINESS"/>	<input type="text" value="POLICY NUMBER"/>	<input type="text" value="LINE OF BUSINESS"/>	<input type="text" value="POLICY NUMBER"/>	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	
5. ANY POLICY OR COVERAGE DECLINED, CANCELLED OR NON-RENEWED DURING THE PRIOR THREE (3) YEARS FOR ANY PREMISES OR OPERATIONS? (Missouri Applicants - Do not answer this question)				N
<input type="checkbox"/> NON-PAYMENT	<input type="checkbox"/> AGENT NO LONGER REPRESENTS CARRIER	<input type="checkbox"/>		
<input type="checkbox"/> NON-RENEWAL	<input type="checkbox"/> UNDERWRITING	<input type="checkbox"/> CONDITION CORRECTED (Describe):		
6. ANY PAST LOSSES OR CLAIMS RELATING TO SEXUAL ABUSE OR MOLESTATION ALLEGATIONS, DISCRIMINATION OR NEGLIGENT HIRING?				N
7. DURING THE LAST FIVE YEARS (TEN IN RI), HAS ANY APPLICANT BEEN INDICTED FOR OR CONVICTED OF ANY DEGREE OF THE CRIME OF FRAUD, BRIBERY, ARSON OR ANY OTHER ARSON-RELATED CRIME IN CONNECTION WITH THIS OR ANY OTHER PROPERTY? (In RI, this question must be answered by any applicant for property insurance. Failure to disclose the existence of an arson conviction is a misdemeanor punishable by a sentence of up to one year of imprisonment).				N
8. ANY UNCORRECTED FIRE AND/OR SAFETY CODE VIOLATIONS?				N
<input type="text" value="OCCURRENCE DATE"/>	<input type="text" value="EXPLANATION"/>	<input type="text" value="RESOLUTION"/>	<input type="text" value="RESOLUTION DATE"/>	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	
9. HAS APPLICANT HAD A FORECLOSURE, REPOSSESSION, BANKRUPTCY OR FILED FOR BANKRUPTCY DURING THE LAST FIVE (5) YEARS?				N
<input type="text" value="OCCURRENCE DATE"/>	<input type="text" value="EXPLANATION"/>	<input type="text" value="RESOLUTION"/>	<input type="text" value="RESOLUTION DATE"/>	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	
10. HAS APPLICANT HAD A JUDGEMENT OR LIEN DURING THE LAST FIVE (5) YEARS?				N
<input type="text" value="OCCURRENCE DATE"/>	<input type="text" value="EXPLANATION"/>	<input type="text" value="RESOLUTION"/>	<input type="text" value="RESOLUTION DATE"/>	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	
11. HAS BUSINESS BEEN PLACED IN A TRUST?				N
<input type="text" value="NAME OF TRUST"/>				
12. ANY FOREIGN OPERATIONS, FOREIGN PRODUCTS DISTRIBUTED IN USA, OR US PRODUCTS SOLD/DISTRIBUTED IN FOREIGN COUNTRIES? (If "YES", attach ACORD 815 for Liability Exposure and/or ACORD 816 for Property Exposure)				N
13. DOES APPLICANT HAVE OTHER BUSINESS VENTURES FOR WHICH COVERAGE IS NOT REQUESTED?				N

REMARKS / PROCESSING INSTRUCTIONS (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

SEE ATTACHED ACORD 101

PRIOR CARRIER INFORMATION

YEAR	CATEGORY	GENERAL LIABILITY	AUTOMOBILE	PROPERTY	OTHER:
	CARRIER				
	POLICY NUMBER				
	PREMIUM	\$	\$	\$	\$
	EFFECTIVE DATE				
	EXPIRATION DATE				

PRIOR CARRIER INFORMATION (continued)

YEAR	CATEGORY	GENERAL LIABILITY	AUTOMOBILE	PROPERTY	OTHER:
	CARRIER				
	POLICY NUMBER				
	PREMIUM	\$	\$	\$	\$
	EFFECTIVE DATE				
	EXPIRATION DATE				
	CARRIER				
	POLICY NUMBER				
	PREMIUM	\$	\$	\$	\$
	EFFECTIVE DATE				
	EXPIRATION DATE				

LOSS HISTORY Check if none (Attach Loss Summary for Additional Loss Information)

ENTER ALL CLAIMS OR LOSSES (REGARDLESS OF FAULT AND WHETHER OR NOT INSURED) OR OCCURRENCES THAT MAY GIVE RISE TO CLAIMS FOR THE LAST _____ YEARS						TOTAL LOSSES: \$	
DATE OF OCCURRENCE	LINE	TYPE / DESCRIPTION OF OCCURRENCE OR CLAIM	DATE OF CLAIM	AMOUNT PAID	AMOUNT RESERVED	SUBROGATION Y / N	CLAIM OPEN Y / N

SIGNATURE

Copy of the Notice of Information Practices (Privacy) has been given to the applicant. (Not required in all states, contact your agent or broker for your state's requirements.)

PERSONAL INFORMATION ABOUT YOU, INCLUDING INFORMATION FROM A CREDIT OR OTHER INVESTIGATIVE REPORT, MAY BE COLLECTED FROM PERSONS OTHER THAN YOU IN CONNECTION WITH THIS APPLICATION FOR INSURANCE AND SUBSEQUENT AMENDMENTS AND RENEWALS. SUCH INFORMATION AS WELL AS OTHER PERSONAL AND PRIVILEGED INFORMATION COLLECTED BY US OR OUR AGENTS MAY IN CERTAIN CIRCUMSTANCES BE DISCLOSED TO THIRD PARTIES WITHOUT YOUR AUTHORIZATION. CREDIT SCORING INFORMATION MAY BE USED TO HELP DETERMINE EITHER YOUR ELIGIBILITY FOR INSURANCE OR THE PREMIUM YOU WILL BE CHARGED. WE MAY USE A THIRD PARTY IN CONNECTION WITH THE DEVELOPMENT OF YOUR SCORE. YOU MAY HAVE THE RIGHT TO REVIEW YOUR PERSONAL INFORMATION IN OUR FILES AND REQUEST CORRECTION OF ANY INACCURACIES. YOU MAY ALSO HAVE THE RIGHT TO REQUEST IN WRITING THAT WE CONSIDER EXTRAORDINARY LIFE CIRCUMSTANCES IN CONNECTION WITH THE DEVELOPMENT OF YOUR CREDIT SCORE. THESE RIGHTS MAY BE LIMITED IN SOME STATES. PLEASE CONTACT YOUR AGENT OR BROKER TO LEARN HOW THESE RIGHTS MAY APPLY IN YOUR STATE OR FOR INSTRUCTIONS ON HOW TO SUBMIT A REQUEST TO US FOR A MORE DETAILED DESCRIPTION OF YOUR RIGHTS AND OUR PRACTICES REGARDING PERSONAL INFORMATION. (Not applicable in AZ, CA, DE, KS, MA, MN, ND, NY, OR, VA, or WV. Specific ACORD 38s are available for applicants in these states.) (Applicant's Initials): _____

Applicable in AL, AR, DC, LA, MD, NM, RI and WV: Any person who knowingly (or willfully)* presents a false or fraudulent claim for payment of a loss or benefit or knowingly (or willfully)* presents false information in an application for insurance is guilty of a crime and may be subject to fines and confinement in prison. *Applies in MD Only.

Applicable in CO: It is unlawful to knowingly provide false, incomplete, or misleading facts or information to an insurance company for the purpose of defrauding or attempting to defraud the company. Penalties may include imprisonment, fines, denial of insurance and civil damages. Any insurance company or agent of an insurance company who knowingly provides false, incomplete, or misleading facts or information to a policyholder or claimant for the purpose of defrauding or attempting to defraud the policyholder or claimant with regard to a settlement or award payable from insurance proceeds shall be reported to the Colorado Division of Insurance within the Department of Regulatory Agencies.

Applicable in FL and OK: Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony (of the third degree)*. *Applies in FL Only.

Applicable in KS: Any person who, knowingly and with intent to defraud, presents, causes to be presented or prepares with knowledge or belief that it will be presented to or by an insurer, purported insurer, broker or any agent thereof, any written statement as part of, or in support of, an application for the issuance of, or the rating of an insurance policy for personal or commercial insurance, or a claim for payment or other benefit pursuant to an insurance policy for commercial or personal insurance which such person knows to contain materially false information concerning any fact material thereto; or conceals, for the purpose of misleading, information concerning any fact material thereto commits a fraudulent insurance act.

Applicable in KY, NY, OH and PA: Any person who knowingly and with intent to defraud any insurance company or other person files an application for insurance or statement of claim containing any materially false information or conceals for the purpose of misleading, information concerning any fact material thereto commits a fraudulent insurance act, which is a crime and subjects such person to criminal and civil penalties (not to exceed five thousand dollars and the stated value of the claim for each such violation)*. *Applies in NY Only.


Applicable in ME, TN, VA and WA: It is a crime to knowingly provide false, incomplete or misleading information to an insurance company for the purpose of defrauding the company. Penalties (may)* include imprisonment, fines and denial of insurance benefits. *Applies in ME Only.

Applicable in NJ: Any person who includes any false or misleading information on an application for an insurance policy is subject to criminal and civil penalties.

Applicable in OR: Any person who knowingly and with intent to defraud or solicit another to defraud the insurer by submitting an application containing a false statement as to any material fact may be violating state law.

Applicable in PR: Any person who knowingly and with the intention of defrauding presents false information in an insurance application, or presents, helps, or causes the presentation of a fraudulent claim for the payment of a loss or any other benefit, or presents more than one claim for the same damage or loss, shall incur a felony and, upon conviction, shall be sanctioned for each violation by a fine of not less than five thousand dollars (\$5,000) and not more than ten thousand dollars (\$10,000), or a fixed term of imprisonment for three (3) years, or both penalties. Should aggravating circumstances [be] present, the penalty thus established may be increased to a maximum of five (5) years, if extenuating circumstances are present, it may be reduced to a minimum of two (2) years.

THE UNDERSIGNED IS AN AUTHORIZED REPRESENTATIVE OF THE APPLICANT AND REPRESENTS THAT REASONABLE INQUIRY HAS BEEN MADE TO OBTAIN THE ANSWERS TO QUESTIONS ON THIS APPLICATION. HE/SHE REPRESENTS THAT THE ANSWERS ARE TRUE, CORRECT AND COMPLETE TO THE BEST OF HIS/HER KNOWLEDGE.

PRODUCER'S SIGNATURE 	PRODUCER'S NAME (Please Print) Lloyd Turner	STATE PRODUCER LICENSE NO (Required in Florida)
APPLICANT'S SIGNATURE	DATE	NATIONAL PRODUCER NUMBER



ADDITIONAL REMARKS SCHEDULE

AGENCY Walter Mortensen Insurance / INSURICA	License # 0D44424	NAMED INSURED Cuyama Basin Groundwater Sustainability Agency 4900 California Ave., Tower B, Second Floor Bakersfield, CA 93309
POLICY NUMBER		
CARRIER	NAIC CODE N/A	EFFECTIVE DATE: 04/01/2019

ADDITIONAL REMARKS

THIS ADDITIONAL REMARKS FORM IS A SCHEDULE TO ACORD FORM,
 FORM NUMBER: ACORD 125 FORM TITLE: COMMERCIAL INSURANCE APPLICATION INFORMATION SECTION

Description of operations

The state has mandated that groundwater has to be monitored and a plan submitted to the state by 2020 on how groundwater levels will be sustained. New districts and JPA's are being formed to study and submit plans to the state for approval that will meet the states requirements and still provide the members with the maximum amount of water allowable. If they do not submit a plan the state will come in and monitor and control the amount of water that can be pumped out of the ground without any input form the members of the district or JPA. When state approves the plan submitted the entity has 20 years to implement it. All plans must be implemented by 2040.



COMMERCIAL GENERAL LIABILITY SECTION

DATE (MM/DD/YYYY)
11/26/2018

AGENCY Walter Mortensen Insurance / INSURICA	License # 0D44424	CARRIER	NAIC CODE N/A
POLICY NUMBER	EFFECTIVE DATE 04/01/2019	APPLICANT / FIRST NAMED INSURED Cuyama Basin Groundwater Sustainability Agency	

IMPORTANT - If CLAIMS MADE is checked in the COVERAGE / LIMITS section below, this is an application for a claims-made policy. Read all provisions of the policy carefully.

COVERAGES

LIMITS

<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY	GENERAL AGGREGATE	\$	10,000,000	PREMIUMS
<input type="checkbox"/> CLAIMS MADE	LIMIT APPLIES PER:	<input type="checkbox"/> POLICY	<input type="checkbox"/> LOCATION	PREMISES/OPERATIONS
<input checked="" type="checkbox"/> OCCURRENCE	<input type="checkbox"/> PROJECT	<input type="checkbox"/> OTHER:		
<input type="checkbox"/> OWNER'S & CONTRACTOR'S PROTECTIVE	PRODUCTS & COMPLETED OPERATIONS AGGREGATE	\$	10,000,000	PRODUCTS
DEDUCTIBLES	PERSONAL & ADVERTISING INJURY	\$	1,000,000	OTHER
<input type="checkbox"/> PROPERTY DAMAGE	EACH OCCURRENCE	\$	1,000,000	
<input type="checkbox"/> BODILY INJURY	DAMAGE TO RENTED PREMISES (each occurrence)	\$	1,000,000	
<input checked="" type="checkbox"/> EAOC	MEDICAL EXPENSE (Any one person)	\$	10,000	TOTAL
\$ 5,000.00	EMPLOYEE BENEFITS	\$		
	HIRED AND NON OWNED AUTO	\$	1,000,000	

OTHER COVERAGES, RESTRICTIONS AND/OR ENDORSEMENTS (For hired/non-owned auto coverages attach the applicable state Business Auto Section, ACORD 137)
See attached Additional Coverages overflow.

APPLICABLE ONLY IN WISCONSIN: IF NON-OWNED ONLY AUTO COVERAGE IS TO BE PROVIDED UNDER THE POLICY:

1. UM / UIM COVERAGE IS IS NOT AVAILABLE. 2. MEDICAL PAYMENTS COVERAGE IS IS NOT AVAILABLE.

SCHEDULE OF HAZARDS

LOC #	HAZ #	CLASSIFICATION	CLASS CODE	PREMIUM BASIS	EXPOSURE	TERR	RATE		PREMIUM	
							PREM/OPS	PRODUCTS	PREM/OPS	PRODUCTS
1	1			T	10000000					

RATING AND PREMIUM BASIS
 (S) GROSS SALES - PER \$1,000/SALES (P) PAYROLL - PER \$1,000/PAY (C) TOTAL COST - PER \$1,000/COST (U) UNIT - PER UNIT
 (A) AREA - PER 1,000/SQ FT (M) ADMISSIONS - PER 1,000/ADM (T) OTHER

CLAIMS MADE (Explain all "Yes" responses)

EXPLAIN ALL "YES" RESPONSES	Y / N
1. PROPOSED RETROACTIVE DATE:	
2. ENTRY DATE INTO UNINTERRUPTED CLAIMS MADE COVERAGE:	
3. HAS ANY PRODUCT, WORK, ACCIDENT, OR LOCATION BEEN EXCLUDED, UNINSURED OR SELF-INSURED FROM ANY PREVIOUS COVERAGE?	N
4. WAS TAIL COVERAGE PURCHASED UNDER ANY PREVIOUS POLICY?	N

EMPLOYEE BENEFITS LIABILITY

1. DEDUCTIBLE PER CLAIM: \$	3. NUMBER OF EMPLOYEES COVERED BY EMPLOYEE BENEFITS PLANS:
2. NUMBER OF EMPLOYEES:	4. RETROACTIVE DATE:

CONTRACTORS

EXPLAIN ALL "YES" RESPONSES (For all past or present operations)					Y / N
1. DOES APPLICANT DRAW PLANS, DESIGNS, OR SPECIFICATIONS FOR OTHERS?					
2. DO ANY OPERATIONS INCLUDE BLASTING OR UTILIZE OR STORE EXPLOSIVE MATERIAL?					
3. DO ANY OPERATIONS INCLUDE EXCAVATION, TUNNELING, UNDERGROUND WORK OR EARTH MOVING?					
4. DO YOUR SUBCONTRACTORS CARRY COVERAGES OR LIMITS LESS THAN YOURS?					
5. ARE SUBCONTRACTORS ALLOWED TO WORK WITHOUT PROVIDING YOU WITH A CERTIFICATE OF INSURANCE?					
6. DOES APPLICANT LEASE EQUIPMENT TO OTHERS WITH OR WITHOUT OPERATORS?					
DESCRIBE THE TYPE OF WORK SUBCONTRACTED	\$ PAID TO SUB-CONTRACTORS:	% OF WORK SUBCONTRACTED:	# FULL-TIME STAFF:	# PART-TIME STAFF:	

PRODUCTS / COMPLETED OPERATIONS

PRODUCTS	ANNUAL GROSS SALES	# OF UNITS	TIME IN MARKET	EXPECTED LIFE	INTENDED USE	PRINCIPAL COMPONENTS

EXPLAIN ALL "YES" RESPONSES (For all past or present products or operations) PLEASE ATTACH LITERATURE, BROCHURES, LABELS, WARNINGS, ETC.					Y / N
1. DOES APPLICANT INSTALL, SERVICE OR DEMONSTRATE PRODUCTS?					
2. FOREIGN PRODUCTS SOLD, DISTRIBUTED, USED AS COMPONENTS? (If "YES", attach ACORD 815)					
3. RESEARCH AND DEVELOPMENT CONDUCTED OR NEW PRODUCTS PLANNED?					
4. GUARANTEES, WARRANTIES, HOLD HARMLESS AGREEMENTS?					
5. PRODUCTS RELATED TO AIRCRAFT/SPACE INDUSTRY?					
6. PRODUCTS RECALLED, DISCONTINUED, CHANGED?					
7. PRODUCTS OF OTHERS SOLD OR RE-PACKAGED UNDER APPLICANT LABEL?					
8. PRODUCTS UNDER LABEL OF OTHERS?					
9. VENDORS COVERAGE REQUIRED?					
10. DOES ANY NAMED INSURED SELL TO OTHER NAMED INSUREDS?					

ADDITIONAL INTEREST / CERTIFICATE RECIPIENT

ACORD 45 attached for additional names

INTEREST <input type="checkbox"/> ADDITIONAL INSURED <input type="checkbox"/> EMPLOYEE AS LESSOR <input type="checkbox"/> LIENHOLDER <input type="checkbox"/> LOSS PAYEE <input type="checkbox"/> MORTGAGEE	NAME AND ADDRESS	RANK:	EVIDENCE:	CERTIFICATE	INTEREST IN ITEM NUMBER	
					LOCATION:	BUILDING:
					ITEM CLASS:	ITEM:
					ITEM DESCRIPTION	
REFERENCE / LOAN #:						

GENERAL INFORMATION

EXPLAIN ALL "YES" RESPONSES (For all past or present operations)		Y / N																								
1. ANY MEDICAL FACILITIES PROVIDED OR MEDICAL PROFESSIONALS EMPLOYED OR CONTRACTED?		N																								
2. ANY EXPOSURE TO RADIOACTIVE/NUCLEAR MATERIALS?		N																								
3. DO/HAVE PAST, PRESENT OR DISCONTINUED OPERATIONS INVOLVE(D) STORING, TREATING, DISCHARGING, APPLYING, DISPOSING, OR TRANSPORTING OF HAZARDOUS MATERIAL? (e.g. landfills, wastes, fuel tanks, etc)		N																								
4. ANY OPERATIONS SOLD, ACQUIRED, OR DISCONTINUED IN LAST FIVE (5) YEARS?		N																								
5. DO YOU RENT OR LOAN EQUIPMENT TO OTHERS?		N																								
<table border="1"> <thead> <tr> <th>EQUIPMENT</th> <th colspan="2">TYPE OF EQUIPMENT</th> <th>INSTRUCTION GIVEN (Y/N)</th> </tr> </thead> <tbody> <tr> <td></td> <td>SMALL TOOLS</td> <td>LARGE EQUIPMENT</td> <td></td> </tr> <tr> <td></td> <td>SMALL TOOLS</td> <td>LARGE EQUIPMENT</td> <td></td> </tr> </tbody> </table>		EQUIPMENT	TYPE OF EQUIPMENT		INSTRUCTION GIVEN (Y/N)		SMALL TOOLS	LARGE EQUIPMENT			SMALL TOOLS	LARGE EQUIPMENT														
EQUIPMENT	TYPE OF EQUIPMENT		INSTRUCTION GIVEN (Y/N)																							
	SMALL TOOLS	LARGE EQUIPMENT																								
	SMALL TOOLS	LARGE EQUIPMENT																								
6. ANY WATERCRAFT, DOCKS, FLOATS OWNED, HIRED OR LEASED?		N																								
7. ANY PARKING FACILITIES OWNED/RENTED?		N																								
8. IS A FEE CHARGED FOR PARKING?		N																								
9. RECREATION FACILITIES PROVIDED?		N																								
10. ARE THERE ANY LODGING OPERATIONS INCLUDING APARTMENTS? (If "YES", answer the following):		N																								
# APTS	TOTAL APT AREA Sq. Ft.	DESCRIBE OTHER LODGING OPERATIONS																								
11. IS THERE A SWIMMING POOL ON PREMISES? (Check all that apply)		N																								
<input type="checkbox"/> APPROVED FENCE <input type="checkbox"/> LIMITED ACCESS <input type="checkbox"/> DIVING BOARD <input type="checkbox"/> SLIDE <input type="checkbox"/> ABOVE GROUND <input type="checkbox"/> IN GROUND <input type="checkbox"/> LIFE GUARD																										
12. ARE SOCIAL EVENTS SPONSORED?		N																								
13. ARE ATHLETIC TEAMS SPONSORED?		N																								
<table border="1"> <thead> <tr> <th>TYPE OF SPORT</th> <th>CONTACT SPORT (Y/N)</th> <th>AGE GROUP</th> <th>TYPE OF SPORT</th> <th>CONTACT SPORT (Y/N)</th> <th>AGE GROUP</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td><input type="checkbox"/> 13 - 18</td> <td></td> <td></td> <td><input type="checkbox"/> 13 - 18</td> </tr> <tr> <td></td> <td></td> <td><input type="checkbox"/> 12 & UNDER</td> <td></td> <td></td> <td><input type="checkbox"/> 12 & UNDER</td> </tr> <tr> <td></td> <td></td> <td><input type="checkbox"/> OVER 18</td> <td></td> <td></td> <td><input type="checkbox"/> OVER 18</td> </tr> </tbody> </table>		TYPE OF SPORT	CONTACT SPORT (Y/N)	AGE GROUP	TYPE OF SPORT	CONTACT SPORT (Y/N)	AGE GROUP			<input type="checkbox"/> 13 - 18			<input type="checkbox"/> 13 - 18			<input type="checkbox"/> 12 & UNDER			<input type="checkbox"/> 12 & UNDER			<input type="checkbox"/> OVER 18			<input type="checkbox"/> OVER 18	
TYPE OF SPORT	CONTACT SPORT (Y/N)	AGE GROUP	TYPE OF SPORT	CONTACT SPORT (Y/N)	AGE GROUP																					
		<input type="checkbox"/> 13 - 18			<input type="checkbox"/> 13 - 18																					
		<input type="checkbox"/> 12 & UNDER			<input type="checkbox"/> 12 & UNDER																					
		<input type="checkbox"/> OVER 18			<input type="checkbox"/> OVER 18																					
EXTENT OF SPONSORSHIP:																										
14. ANY STRUCTURAL ALTERATIONS CONTEMPLATED?		N																								
15. ANY DEMOLITION EXPOSURE CONTEMPLATED?		N																								

GENERAL INFORMATION (continued)

EXPLAIN ALL "YES" RESPONSES (For all past or present operations)				Y / N
16. HAS APPLICANT BEEN ACTIVE IN OR IS CURRENTLY ACTIVE IN JOINT VENTURES?				N
17. DO YOU LEASE EMPLOYEES TO OR FROM OTHER EMPLOYERS?				N
LEASE TO	WORKERS COMPENSATION COVERAGE CARRIED (Y/N)	LEASE FROM	WORKERS COMPENSATION COVERAGE CARRIED (Y/N)	
18. IS THERE A LABOR INTERCHANGE WITH ANY OTHER BUSINESS OR SUBSIDIARIES?				N
19. ARE DAY CARE FACILITIES OPERATED OR CONTROLLED?				N
20. HAVE ANY CRIMES OCCURRED OR BEEN ATTEMPTED ON YOUR PREMISES WITHIN THE LAST THREE (3) YEARS?				N
21. IS THERE A FORMAL, WRITTEN SAFETY AND SECURITY POLICY IN EFFECT?				N
22. DOES THE BUSINESSES' PROMOTIONAL LITERATURE MAKE ANY REPRESENTATIONS ABOUT THE SAFETY OR SECURITY OF THE PREMISES?				N

REMARKS (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

--

SIGNATURE

Applicable in AL, AR, DC, LA, MD, NM, RI and WV: Any person who knowingly (or willfully)* presents a false or fraudulent claim for payment of a loss or benefit or knowingly (or willfully)* presents false information in an application for insurance is guilty of a crime and may be subject to fines and confinement in prison. *Applies in MD Only.

Applicable in CO: It is unlawful to knowingly provide false, incomplete, or misleading facts or information to an insurance company for the purpose of defrauding or attempting to defraud the company. Penalties may include imprisonment, fines, denial of insurance and civil damages. Any insurance company or agent of an insurance company who knowingly provides false, incomplete, or misleading facts or information to a policyholder or claimant for the purpose of defrauding or attempting to defraud the policyholder or claimant with regard to a settlement or award payable from insurance proceeds shall be reported to the Colorado Division of Insurance within the Department of Regulatory Agencies.

Applicable in FL and OK: Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony (of the third degree)*. *Applies in FL Only.

Applicable in KS: Any person who, knowingly and with intent to defraud, presents, causes to be presented or prepares with knowledge or belief that it will be presented to or by an insurer, purported insurer, broker or any agent thereof, any written statement as part of, or in support of, an application for the issuance of, or the rating of an insurance policy for personal or commercial insurance, or a claim for payment or other benefit pursuant to an insurance policy for commercial or personal insurance which such person knows to contain materially false information concerning any fact material thereto; or conceals, for the purpose of misleading, information concerning any fact material thereto commits a fraudulent insurance act.

Applicable in KY, NY, OH and PA: Any person who knowingly and with intent to defraud any insurance company or other person files an application for insurance or statement of claim containing any materially false information or conceals for the purpose of misleading, information concerning any fact material thereto commits a fraudulent insurance act, which is a crime and subjects such person to criminal and civil penalties (not to exceed five thousand dollars and the stated value of the claim for each such violation)*. *Applies in NY Only.


Applicable in ME, TN, VA and WA: It is a crime to knowingly provide false, incomplete or misleading information to an insurance company for the purpose of defrauding the company. Penalties (may)* include imprisonment, fines and denial of insurance benefits. *Applies in ME Only.

Applicable in NJ: Any person who includes any false or misleading information on an application for an insurance policy is subject to criminal and civil penalties.

Applicable in OR: Any person who knowingly and with intent to defraud or solicit another to defraud the insurer by submitting an application containing a false statement as to any material fact may be violating state law.

Applicable in PR: Any person who knowingly and with the intention of defrauding presents false information in an insurance application, or presents, helps, or causes the presentation of a fraudulent claim for the payment of a loss or any other benefit, or presents more than one claim for the same damage or loss, shall incur a felony and, upon conviction, shall be sanctioned for each violation by a fine of not less than five thousand dollars (\$5,000) and not more than ten thousand dollars (\$10,000), or a fixed term of imprisonment for three (3) years, or both penalties. Should aggravating circumstances [be] present, the penalty thus established may be increased to a maximum of five (5) years, if extenuating circumstances are present, it may be reduced to a minimum of two (2) years.

THE UNDERSIGNED IS AN AUTHORIZED REPRESENTATIVE OF THE APPLICANT AND REPRESENTS THAT REASONABLE INQUIRY HAS BEEN MADE TO OBTAIN THE ANSWERS TO QUESTIONS ON THIS APPLICATION. HE/SHE REPRESENTS THAT THE ANSWERS ARE TRUE, CORRECT AND COMPLETE TO THE BEST OF HIS/HER KNOWLEDGE.

PRODUCER'S SIGNATURE 	PRODUCER'S NAME (Please Print) Lloyd Turner	STATE PRODUCER LICENSE NO (Required in Florida)
APPLICANT'S SIGNATURE	DATE	NATIONAL PRODUCER NUMBER

ADDITIONAL COVERAGES OVERFLOW

CUYABAS-01

MHERNANDEZ

PAGE 1

OF 1

* State CA; Code PUBLI; Description Public Officials & Management Liability; Limit 1 \$10,000,000; Limit 2 \$1,000,000; Deductible \$5,000

Loc# 1, Bldg# 1



UMBRELLA / EXCESS SECTION

DATE (MM/DD/YYYY)
11/26/2018

IMPORTANT - If CLAIMS MADE is checked in the POLICY INFORMATION section below, this is an application for a claims-made policy.

AGENCY Walter Mortensen Insurance / INSURICA	License # 0D44424	CARRIER	NAIC CODE N/A
POLICY NUMBER	EFFECTIVE DATE 04/01/2019	NAMED INSURED(S) Cuyama Basin Groundwater Sustainability Agency	

POLICY INFORMATION

TRANSACTION TYPE				LIMIT OF LIABILITY		RETAINED LIMIT	
<input type="checkbox"/>	NEW	<input type="checkbox"/>	UMBRELLA	<input checked="" type="checkbox"/>	OCCURRENCE	\$	\$
<input checked="" type="checkbox"/>	RENEWAL	<input checked="" type="checkbox"/>	EXCESS	<input type="checkbox"/>	CLAIMS MADE		
				RETROACTIVE DATE			
				PROPOSED	CURRENT		
EXPIRING POL #:				\$	2,000,000 EA OCC		
				\$	2,000,000 Aggregate		
				\$		FIRST DOLLAR DEFENSE (Y / N)	

EMPLOYEE BENEFITS LIABILITY

LIMIT OF INSURANCE (Ea Employee)	AGGREGATE LIMIT FOR EBL	RETAINED LIMIT FOR EBL	RETROACTIVE DATE FOR EBL
\$	\$	\$	
NAME OF BENEFIT PROGRAM			

PRIMARY LOCATION & SUBSIDIARIES (ACORD 125)

#	NAME AND LOCATION OF PRIMARY AND ALL SUBSIDIARY COMPANIES (Describe Operations)	ANNUAL PAYROLL	ANN GROSS SALES	FOREIGN GROSS SALES	# EMPL
1	NAME: Cuyama Basin Groundwater Sustainability Agency LOCATION: 4900 California Ave., Tower B, Second Floor DESCRIPTION: Bakersfield, CA 93309				
	NAME: LOCATION: DESCRIPTION:				
	NAME: LOCATION: DESCRIPTION:				
	NAME: LOCATION: DESCRIPTION:				
	NAME: LOCATION: DESCRIPTION:				
	NAME: LOCATION: DESCRIPTION:				

UNDERLYING INSURANCE

LIST ALL LIABILITY / COMPENSATION POLICIES IN FORCE TO APPLY AS UNDERLYING INSURANCE							+ - RATING MOD
TYPE	CARRIER / POLICY NUMBER	POLICY EFF DATE	POLICY EXP DATE	LIMITS		ANNUAL RENEWAL PREMIUM	
AUTOMOBILE LIABILITY				CSL EA ACC	\$	\$	
				BI EA ACC	\$	\$	
				BI EA PER	\$		
				PD EA ACC	\$	\$	
GENERAL LIABILITY POLICY TYPE <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE	JPRIMA JPAPKG-00223	12/28/2017	04/01/2018	EACH OCCURRENCE	\$ 1,000,000	PREM / OPS	
				GENERAL AGGR	\$ 10,000,000	\$	
				PROD & COMP OPS AGGREGATE	\$ 10,000,000	PRODUCTS	
				PERSONAL & ADV INJURY	\$ 1,000,000	\$	
				DAMAGE TO RENTED PREMISES	\$ 1,000,000	OTHER	
				MEDICAL EXPENSE	\$ 10,000	\$	
EMPLOYERS LIABILITY				EACH ACCIDENT	\$	\$	
				DISEASE			
				EACH EMPLOYEE	\$		
				DISEASE POLICY LIMIT	\$		
						\$	
						\$	

UNDERLYING INSURANCE (continued)

UNDERLYING GENERAL LIABILITY INFORMATION (Explain all "YES" responses)

1. ARE DEFENSE COSTS: WITHIN AGGREGATE LIMITS? A SEPARATE LIMIT? UNLIMITED?

2. INDICATE THE EDITION DATE OF THE ISO FORM OR SIMILAR FILING FOR THE UNDERLYING COVERAGE:

3. HAS ANY PRODUCT, WORK, ACCIDENT, OR LOCATION BEEN EXCLUDED, UNINSURED OR SELF INSURED FROM ANY PREVIOUS COVERAGE? (Y / N) Y N

4. FOR CLAIMS MADE, INDICATE RETROACTIVE DATE OF CURRENT UNDERLYING POLICY:

5. FOR CLAIMS MADE, INDICATE ENTRY DATE INTO UNINTERRUPTED CLAIMS MADE COVERAGE:

6. FOR CLAIMS MADE, WAS "TAIL" COVERAGE PURCHASED FOR ANY PREVIOUS PRIMARY OR EXCESS POLICY? (Y / N) Y N EFF. DATE: _____

CHECK ALL COVERAGES IN UNDERLYING POLICIES. ALSO CHECK IF ANY EXPOSURES ARE PRESENT FOR EACH COVERAGE. PROVIDE AN EXPLANATION. EXPLAIN IF DIFFERENT LIMITS, EXTENSIONS, OR EXCLUSIONS. EXPLAIN ANY SPECIAL COVERAGES BEYOND STANDARD FORMS. **EXPLAIN ALL EXPOSURES.**

CHECK IF APPROPRIATE		COVERAGE	EXPOSURE	COVERAGE	EXPOSURE
<input type="checkbox"/>	ANY AUTO (SYMBOL 1)	CARE, CUSTODY, CONTROL	<input type="checkbox"/>	PROFESSIONAL LIABILITY (E&O)	<input type="checkbox"/>
<input type="checkbox"/>	CGL - CLAIMS MADE	EMPLOYEE BENEFIT LIABILITY	<input type="checkbox"/>	VENDORS LIABILITY	<input type="checkbox"/>
<input type="checkbox"/>	CGL - OCCURRENCE	FOREIGN LIABILITY / TRAVEL	<input type="checkbox"/>	WATERCRAFT LIABILITY	<input type="checkbox"/>
<input type="checkbox"/>	COVERAGE	GARAGEKEEPERS LIABILITY	<input type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	EXPOSURE	INCIDENTAL MEDICAL MALPRACTICE	<input type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	AIRCRAFT LIABILITY	LIQUOR LIABILITY	<input type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	AIRCRAFT PASSENGER LIABILITY	POLLUTION LIABILITY	<input type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	ADDITIONAL INTERESTS		<input type="checkbox"/>		<input type="checkbox"/>

UNDERLYING INSURANCE COVERAGE INFORMATION (INCLUDE ALL RESTRICTIONS; e.g. LASER ENDORSEMENTS, DISCRIMINATION, SUBROGATION WAIVERS, OR EXTENSIONS OF COVERAGE) Attach ACORD 101, Additional Remarks Schedule, if more space is required.

PREVIOUS EXPERIENCE: (GIVE DETAILS OF ALL LIABILITY CLAIMS EXCEEDING \$10,000 OR OCCURRENCES THAT MAY GIVE RISE TO CLAIMS, DURING THE PAST FIVE (5) YEARS, WHETHER INSURED OR NOT. SPECIFY DATE, COVERAGE, DESCRIPTION, AMOUNT PAID, AMOUNT OUTSTANDING) Attach ACORD 101, Additional Remarks Schedule, if more space is required.

NO SUCH CLAIMS

CARE, CUSTODY, CONTROL

LOC	PROPERTY TYPE	VALUE	A*	B*	C*	D*	SQ FT OF BLDG OCC
	REAL						
	PERSONAL						

OCCUPANCY / DESCRIPTION OF PERSONAL PROPERTY

*APPLICANT: [A] IS HELD HARMLESS IN THE LEASE, [B] HAS A WAIVER OF SUBROGATION, [C] IS A NAMED INSURED IN THE FIRE POLICY, [D] OTHER (specify)

VEHICLES

TYPE	# OWNED	# NON-OWNED	# LEASED	PROPERTY HAULED	RADIUS (MILES)		
					LOCAL	INTER-MEDIATE	LONG DISTANCE
PRIVATE PASSENGER							
TRUCKS	LIGHT						
	MEDIUM						
	HEAVY						
	EX. HEAVY						
TRUCKS / TRACTORS	HEAVY						
	EX. HEAVY						
BUSES							

ADDITIONAL EXPOSURES

AGENCY CUSTOMER ID: **CUYABAS-01**

MHERNANDEZ

EXPLAIN ALL "YES" RESPONSES, PROVIDE OTHER INFORMATION REQUIRED		Y / N
ADVERTISERS LIABILITY		
1. MEDIA USED: ANNUAL COST: \$		
2. ARE SERVICES OF AN ADVERTISING AGENCY USED?		
3. ANY COVERAGE PROVIDED UNDER AGENCY'S POLICY?		
AIRCRAFT LIABILITY		
4. DOES APPLICANT OWN / LEASE / OPERATE AIRCRAFT?		
AUTO LIABILITY		
5. ARE EXPLOSIVES, CAUSTICS, FLAMMABLES OR OTHER DANGEROUS CARGO HAULED?		
6. ARE PASSENGERS CARRIED FOR A FEE?		
7. ANY UNITS NOT INSURED BY UNDERLYING POLICIES?		
8. ARE ANY VEHICLES LEASED OR RENTED TO OTHERS?		
9. ARE HIRED AND NON-OWNED COVERAGES PROVIDED?		
CONTRACTORS LIABILITY		
10. IS BRIDGE, DAM, OR MARINE WORK PERFORMED?		
11. DESCRIBE TYPICAL JOBS PERFORMED (Attach ACORD 101, Additional Remarks Schedule, if more space is required)		
12. DESCRIBE AGREEMENT (Attach ACORD 101, Additional Remarks Schedule, if more space is required)		
13. DOES APPLICANT OWN, RENT, OR OTHERWISE USE CRANES?		
14. DO SUBCONTRACTORS CARRY COVERAGES OR LIMITS LESS THAN APPLICANT?		
EMPLOYERS LIABILITY		
15. IS APPLICANT SELF-INSURED IN ANY STATE?		
16. SUBJECT TO:	<input type="checkbox"/> JONES ACT <input type="checkbox"/> FELA <input type="checkbox"/> STOP GAP <input type="checkbox"/> OTHER:	
INCIDENTAL MALPRACTICE LIABILITY		
17. IS A HOSPITAL OR FIRST AID FACILITY MAINTAINED?		
18. ARE COVERAGES PROVIDED FOR DOCTORS / NURSES?		
19. INDICATE # OF DOCTORS:	NURSES:	BEDS:

ADDITIONAL EXPOSURES (continued)

EXPLAIN ALL "YES" RESPONSES, PROVIDE OTHER INFORMATION REQUIRED	Y/N																				
POLLUTION LIABILITY																					
EPA #:																					
20. DO CURRENT OR PAST PRODUCTS, OR THEIR COMPONENTS, CONTAIN HAZARDOUS MATERIALS THAT MAY REQUIRE SPECIAL DISPOSAL METHODS?																					
21. INDICATE THE COVERAGES CARRIED: <input type="checkbox"/> GL WITH STANDARD ISO POLLUTION EXCLUSION <input type="checkbox"/> GL WITH POLLUTION COVERAGE ENDORSEMENT <input type="checkbox"/> GL WITH STANDARD SUDDEN & ACCIDENTAL ONLY <input type="checkbox"/> SEPARATE POLLUTION COVERAGE																					
PRODUCT LIABILITY																					
22. ARE MISSILES, ENGINES, GUIDANCE SYSTEMS, FRAMES OR ANY OTHER PRODUCT USED / INSTALLED IN AIRCRAFT?																					
23. ANY FOREIGN OPERATIONS, FOREIGN PRODUCTS DISTRIBUTED IN THE USA OR US PRODUCTS SOLD / DISTRIBUTED IN FOREIGN COUNTRIES? (If "YES", Attach ACORD 815)																					
24. PRODUCT LIABILITY LOSS IN PAST THREE (3) YEARS? (SPECIFY)																					
25. GROSS SALES FROM EACH OF LAST THREE (3) YEARS: \$ \$ \$																					
PROTECTIVE LIABILITY																					
26. DESCRIBE INDEPENDENT CONTRACTORS (Attach ACORD 101, Additional Remarks Schedule, if more space is required)																					
WATERCRAFT LIABILITY																					
27. DOES APPLICANT OWN OR LEASE WATERCRAFT?																					
<table border="1" style="width:100%; border-collapse: collapse; margin-bottom: 5px;"> <thead> <tr> <th>LOC #</th> <th># OWNED</th> <th>LENGTH</th> <th>HORSEPOWER</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table> <table border="1" style="width:100%; border-collapse: collapse; margin-bottom: 5px;"> <thead> <tr> <th>LOC #</th> <th># OWNED</th> <th>LENGTH</th> <th>HORSEPOWER</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table>	LOC #	# OWNED	LENGTH	HORSEPOWER					LOC #	# OWNED	LENGTH	HORSEPOWER									
LOC #	# OWNED	LENGTH	HORSEPOWER																		
LOC #	# OWNED	LENGTH	HORSEPOWER																		
APARTMENTS / CONDOMINIUMS / HOTELS / MOTELS																					
28.	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>LOC #</th> <th># STORIES</th> <th># UNITS</th> <th># SWIMMING POOLS</th> <th># DIVING BOARDS</th> <th>LOC #</th> <th># STORIES</th> <th># UNITS</th> <th># SWIMMING POOLS</th> <th># DIVING BOARDS</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table>	LOC #	# STORIES	# UNITS	# SWIMMING POOLS	# DIVING BOARDS	LOC #	# STORIES	# UNITS	# SWIMMING POOLS	# DIVING BOARDS										
LOC #	# STORIES	# UNITS	# SWIMMING POOLS	# DIVING BOARDS	LOC #	# STORIES	# UNITS	# SWIMMING POOLS	# DIVING BOARDS												

REMARKS (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

REMARKS (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

Empty box for remarks.

SIGNATURE

ANY PERSON WHO KNOWINGLY AND WITH INTENT TO DEFRAUD ANY INSURANCE COMPANY OR ANOTHER PERSON FILES AN APPLICATION FOR INSURANCE OR STATEMENT OF CLAIM CONTAINING ANY MATERIALLY FALSE INFORMATION, OR CONCEALS FOR THE PURPOSE OF MISLEADING INFORMATION CONCERNING ANY FACT MATERIAL THERETO, COMMITS A FRAUDULENT INSURANCE ACT, WHICH IS A CRIME AND SUBJECTS THE PERSON TO CRIMINAL AND [NY: SUBSTANTIAL] CIVIL PENALTIES. (Not applicable in CO, DC, FL, HI, MA, NE, OH, OK, OR, VT or WA; in LA, ME, TN and VA, insurance benefits may also be denied)

IN THE DISTRICT OF COLUMBIA, WARNING: IT IS A CRIME TO PROVIDE FALSE OR MISLEADING INFORMATION TO AN INSURER FOR THE PURPOSE OF DEFRAUDING THE INSURER OR ANY OTHER PERSON. PENALTIES INCLUDE IMPRISONMENT AND/OR FINES.

IN FLORIDA, ANY PERSON WHO KNOWINGLY AND WITH INTENT TO INJURE, DEFRAUD, OR DECEIVE ANY INSURER FILES A STATEMENT OF CLAIM OR AN APPLICATION CONTAINING ANY FALSE, INCOMPLETE, OR MISLEADING INFORMATION IS GUILTY OF A FELONY OF THE THIRD DEGREE.

IN MASSACHUSETTS, NEBRASKA, OREGON AND VERMONT, ANY PERSON WHO KNOWINGLY AND WITH INTENT TO DEFRAUD ANY INSURANCE COMPANY OR ANOTHER PERSON FILES AN APPLICATION FOR INSURANCE OR STATEMENT OF CLAIM CONTAINING ANY MATERIALLY FALSE INFORMATION, OR CONCEALS FOR THE PURPOSE OF MISLEADING INFORMATION CONCERNING ANY FACT MATERIAL THERETO, MAY BE COMMITTING A FRAUDULENT INSURANCE ACT, WHICH MAY BE A CRIME AND MAY SUBJECT THE PERSON TO CRIMINAL AND CIVIL PENALTIES.

IN WASHINGTON, IT IS A CRIME TO KNOWINGLY PROVIDE FALSE, INCOMPLETE, OR MISLEADING INFORMATION TO AN INSURANCE COMPANY FOR THE PURPOSE OF DEFRAUDING THE COMPANY. PENALTIES INCLUDE IMPRISONMENT, FINES, AND DENIAL OF INSURANCE BENEFITS.

IF THE COMPANY TO WHICH I AM APPLYING OFFERS UNINSURED MOTORISTS (UM) AND/OR UNDERINSURED MOTORISTS (UIM) COVERAGE IN MY STATE:

UNINSURED MOTORISTS (UM) COVERAGE: \$ _____ * UNDERINSURED MOTORISTS (UIM) COVERAGE: \$ _____ *

* IF APPLICABLE IN YOUR STATE

APPLICABLE ONLY IN LOUISIANA, NEW HAMPSHIRE, VERMONT AND WISCONSIN

APPLICABLE ONLY IN LOUISIANA:

I ACKNOWLEDGE THAT UM COVERAGE HAS BEEN EXPLAINED TO ME, AND I HAVE BEEN OFFERED THE OPTION OF SELECTING UM LIMITS EQUAL TO MY LIABILITY LIMITS, UM LIMITS LOWER THAN MY LIABILITY LIMITS, OR TO REJECT UM COVERAGE ENTIRELY.

1. I SELECT UM LIMITS INDICATED IN THIS APPLICATION. [] (INITIALS) OR 2. I REJECT UM COVERAGE IN ITS ENTIRETY. [] (INITIALS)

APPLICABLE ONLY IN NEW HAMPSHIRE:

I ACKNOWLEDGE THAT UM COVERAGE HAS BEEN EXPLAINED TO ME, AND I HAVE BEEN OFFERED THE OPTION OF SELECTING UM LIMITS EQUAL TO MY LIABILITY LIMITS OR TO REJECT UM COVERAGE ENTIRELY.

1. I SELECT UM LIMITS INDICATED IN THIS APPLICATION. [] (INITIALS) OR 2. I REJECT UM COVERAGE IN ITS ENTIRETY. [] (INITIALS)

APPLICABLE ONLY IN VERMONT:

I ACKNOWLEDGE THAT I HAVE BEEN OFFERED UM COVERAGE EQUAL TO MY LIABILITY LIMITS. I HAVE SELECTED THE LIMITS INDICATED IN THIS APPLICATION.

APPLICABLE ONLY IN WISCONSIN:

I ACKNOWLEDGE THAT I HAVE BEEN OFFERED UNINSURED MOTORIST (UM) COVERAGE AND UNDERINSURED MOTORIST (UIM) COVERAGE.

1. I SELECT UM LIMITS INDICATED IN THIS APPLICATION. [] (INITIALS) OR 2. I REJECT UM COVERAGE IN ITS ENTIRETY. [] (INITIALS)

3. I SELECT UIM LIMITS INDICATED IN THIS APPLICATION. [] (INITIALS) OR 4. I REJECT UIM COVERAGE IN ITS ENTIRETY. [] (INITIALS)

IMPORTANT - THE STATEMENTS (ANSWERS) GIVEN ABOVE ARE TRUE AND ACCURATE. THE APPLICANT HAS NOT WILLFULLY CONCEALED OR MISREPRESENTED ANY MATERIAL FACT OR CIRCUMSTANCE CONCERNING THIS APPLICATION. THIS APPLICATION DOES NOT CONSTITUTE A BINDER.

PRODUCER'S SIGNATURE

[Signature]

PRODUCER'S NAME (Please Print)

Lloyd Turner

STATE PRODUCER LICENSE NO (Required in Florida)

APPLICANT'S SIGNATURE

DATE

NATIONAL PRODUCER NUMBER



TO: Board of Directors
Agenda Item No. 9d

FROM: Taylor Blakslee, Hallmark Group

DATE: February 6, 2019

SUBJECT: Annual Audit

Issue

Annual Audit

Recommended Motion

None – information only.

Discussion

The Cuyama Basin Groundwater Sustainability Agency (CBGSA) is required to engage an independent accounting firm to audit financial statements annually. The consultants are requesting the Board's direction regarding (1) performing an annual partial audit or a two-year audit in the fall of 2019, and (2) the location and number of firms to solicit bids from.

Audit Timing

While the CBGSA Joint Exercise of Powers Agreement does not specify the frequency of audits, the CBGSA Fiscal Policies, Procedures and Internal Controls that was adopted on March 7, 2018 directs the CBGSA to perform an annual audit. While the CBGSA was formed on June 6, 2017, the majority of financial activity took place starting in October 2017. Since FY 2017-18 encompasses only nine months of financial activity, and first year audits can be expensive, an additional option is to defer an audit to fall 2019 covering a two-year period.

Location of Audit Firms

Due to the Hallmark Group's coordination of the audit, we recommend soliciting bids from 3-4 Bakersfield firms to minimize costs and improve efficiency as we coordinate with the auditor.



TO: Board of Directors
Agenda Item No. 9e

FROM: Jim Beck, Executive Director

DATE: February 6, 2019

SUBJECT: Payment of Bills

Issue

Consider approving the payment of bills for December 2018.

Recommended Motion

Approve payment of the bills through the month of December 2018 in the amount of \$124,583.44.

Discussion

Consultant invoices for the month of December 2018 are provided as Attachment 1.



1901 Royal Oaks Drive
Suite 200
Sacramento, CA 95815

INVOICE

916 923.1500
hgcpm.com

To: Cuyama Basin GSA
c/o Jim Beck
4900 California Avenue, Ste B
Bakersfield, CA 93309

Please Remit To: **Hallmark Group**
1901 Royal Oaks Drive, Suite 200
Sacramento, CA 95815
P: (916) 923-1500

Invoice No.: 2018-CBWD-TO1-12A
Task Order: HG-001
Date: January 23, 2019

For professional services rendered for the month of December 2018

Task Order	Sub task	Task Description	Billing Classification	Hours	Rate	Amount
HG-001	1	GSA Board of Directors and Advisory Committee Meetings	Executive Director	19.75	\$ 250.00	\$ 4,937.50
			Project Coordinator/Admin	68.25	\$ 100.00	\$ 6,825.00
Total Task 1 Labor						\$ 11,762.50
HG-001	2	Consultant Management and GSP Development	Executive Director	1.50	\$ 250.00	\$ 375.00
			Project Coordinator/Admin	13.25	\$ 100.00	\$ 1,325.00
Total Task 2 Labor						\$ 1,700.00
HG-001	3	Financial Information Coordination	Executive Director	0.00	\$ 250.00	\$ -
			Project Controls	0.00	\$ 200.00	\$ -
			Project Coordinator/Admin	7.50	\$ 100.00	\$ 750.00
Total Task 3 Labor						\$ 750.00
HG-001	4	CBGSA Outreach	Executive Director	5.00	\$ 250.00	\$ 1,250.00
			Project Coordinator/Admin	0.25	\$ 100.00	\$ 25.00
Total Task 4 Labor						\$ 1,275.00
Total Labor						\$ 15,487.50
Travel			12/03/18, 12/18/18			\$ 135.16
Other Direct Costs:			Conference Calls			\$ 224.64
			Fed-Ex Shipping Charges			\$ -
			Printing Costs			\$ 108.20
SubTotal Travel and Other Direct Costs						\$ 468.00
ODC Mark Up					5%	\$ 16.64
Total Travel and Other Direct Costs						\$ 484.64
TOTAL AMOUNT DUE FOR THIS INVOICE						\$ 15,972.14

HG-001	Original Totals	Amendment(s)	Total Committed	Previously Billed	Current Billing	Remaining Balance
Task 1	\$ 63,000.00	\$ -	\$ 63,000.00	\$ 125,340.29	\$ 11,762.50	\$ (74,102.79)
Task 2	\$ 54,750.00	\$ -	\$ 54,750.00	\$ 39,006.06	\$ 1,700.00	\$ 14,043.94
Task 3	\$ 12,750.00	\$ -	\$ 12,750.00	\$ 13,225.00	\$ 750.00	\$ (1,225.00)
Task 4	\$ 31,500.00	\$ -	\$ 31,500.00	\$ 7,191.86	\$ 1,275.00	\$ 23,033.14
Travel & ODCs	\$ 3,750.00	\$ -	\$ 3,750.00	\$ 5,676.85	\$ 484.64	\$ (2,411.49)
Insurance	\$ -	\$ 2,451.00	\$ 2,451.00	\$ 2,451.00	\$ -	\$ -
Total	\$ 165,750.00	\$ 2,451.00	\$ 168,201.00	\$ 192,891.07	\$ 15,972.14	\$ (40,662.21)

CUYAMA BASIN GROUNDWATER SUSTAINABILITY AGENCY

PROGRESS REPORT FOR TASK ORDER CB-HG-001

Client Name:	Cuyama Basin Groundwater Sustainability Agency	Agreement Number:	201709-CB-001
Company Name:	HGCPM, Inc. DBA The Hallmark Group	Address:	1901 Royal Oaks Drive, Suite 200 Sacramento, CA 95815
Task Order Number:	CB-HG-001	Report Period:	December 1-31, 2018
Progress Report Number:		Project Manager:	Jim Beck
Invoice Number:	2018-CBWD-TO1-12A	Invoice Date:	January 23, 2019

SUMMARY OF WORK PERFORMED

Task 1: GSA Board of Directors and Advisory Committee Meetings

- Prepared for and attended monthly Cuyama Basin Groundwater Sustainability Agency (CBGSA) Joint Board of Directors and Standing Advisory Committee (SAC) meeting, and Special Joint Board and SAC meeting.
- Drafted, prepared, and distributed documents for the CBGSA Joint Board and SAC meeting, and Special Joint Board and SAC meeting packets.
- Drafted CBGSA SAC, Joint Board and SAC, and Special Joint Board and SAC meeting minutes.
- Drafted and reviewed agendas for the December Joint Board and SAC meeting, December Special Joint Board and SAC meeting, and January Board and SAC meetings.
- Determined Board and SAC availability for January SAC and Board meetings.
- Met with J. Wooster to discuss potential well location for the California Department of Water Resources (DWR) Technical Support Services.

Task 2: Consultant Management and GSP Development

- Prepared for, met with, and facilitated CBGSA Program Management Team (PMT) on December 7 and 19, 2018 to discuss Groundwater Sustainability Plan (GSP) section progress and outreach.
- Met with Woodard & Curran (W&C) to discuss GSP schedule, threshold strategy presentation slides, and budget.
- Tracked Data Management System chapter comments and revisions and distributed to W&C.

Task 3: Financial Information Coordination

- Drafted Hallmark Group's Task Order 3.

- Corresponded with PMT team, legal counsel, and DWR regarding Grant Administration status.
- Drafted invoices No. 9 and 10 for Santa Barbara County Water Agency's grant with DWR.
- Performed cost tracking analysis.

Task 4: CBGSA Outreach

- Prepared for, attended, and facilitated CBGSA public workshop on December 3, 2018.

DELIVERABLES AND COMPLETED TASKS

- Developed CBGSA Joint Board and SAC agenda for December 3rd meeting, and Special Joint Board and SAC agenda for December 18th.
- Attended CBGSA Joint Board and SAC meeting on December 3rd, and Special Joint Board and SAC meeting on December 18th.
- Drafted meeting minutes for Joint Board and SAC meeting on December 3rd, and Special Joint Board and SAC meeting on December 18th.
- Attended CBGSA public workshop on December 3rd.
- Prepared for, met with, and facilitated CBGSA PMT meetings on December 7 and 19, 2018.

PLANNED OBJECTIVES FOR NEXT REPORTING PERIOD

- Prepared for and attend CBGSA SAC meeting on January 8, 2019, Board meeting on January 9, 2019, and SAC meeting on January 31, 2019.
- This task order has been consolidated with Task Order No. 2 to form Task Order No. 3 for the period January 1, 2019 to January 31, 2020.

CUYAMA PRINTING COSTS

Joint Board and SAC Meeting and Public Workhops - 12/3/2018

Document	B&W, or Color	Pages	Rate	Cost
Agenda (Board/SAC Members)	B&W	30	\$ 0.10	\$ 3.00
Agenda (Public)	B&W	40	\$ 0.10	\$ 4.00
Spanish Presentations	B&W	245	\$ 0.10	\$ 24.50
Sign-in Sheet	B&W	1	\$ 0.10	\$ 0.10
Board Packets	B&W	392	\$ 0.10	\$ 39.20
Name Tags	B&W	2	\$ 0.10	\$ 0.20
Table Tent Card	Color	4	\$ 0.50	\$ 2.00
Total Cost				\$ 73.00

Special Joint Board and SAC Meeting - 12/18/2018

Document	B&W, or Color	Pages	Rate	Cost
Agenda (Board/SAC Members)	B&W	46	\$ 0.10	\$ 4.60
Agenda (Public)	B&W	40	\$ 0.10	\$ 4.00
Spanish Presentations	B&W	265	\$ 0.10	\$ 26.50
Sign-in Sheet	B&W	1	\$ 0.10	\$ 0.10
Total Cost				\$ 35.20

Total Cost	\$ 108.20
------------	-----------



Invoice Date: 1/1/2019

Total: \$513.18

Statement# 37831 Customer# 3122729

HGCPM, Inc. - Formerly Advance Education
1901 Royal oaks DR
Sacramento, CA 95815 -0000

Remit to:
Great America Networks Conferencing
15700 W. 103rd St
Suite 110
Lemont, IL 60439 6608

CALL US
1-877-438-4261

Summary

Balance Information	
Previous Balance	744.62
Payments Received - Thank you!	(744.62)
Balance Forward	
New Charges	
New Usage Charges	427.65
Recurring Charges	0.00
Taxes and Surcharges	85.53
Total New Charges	513.18
Total Amount Due	513.18

Payments

Description	Date	Amount
Payment Received, Thank you!	12/21/18	(744.62)
Subtotal		(\$744.62)

Taxes and Surcharges

Federal Universal Service Fund	85.53
Subtotal	\$85.53

Management Reports

Usage by Category			
Description	Calls	Minutes	Charge
Usage - Conference Calling	166	8,553.00	427.65
	166.00	8,553.00	427.65

Long Distance By Line			
TN	Calls	Mins	Charge
	166	8,553.00	427.65
	166	8,553.00	427.65

Cuyama BDSAC Conference ID: 4641352

#	Date	Time	Other	Location	Mins	Amt
1	12/03/18	06:00P	6617662369	Host	134.00	6.70
2	12/03/18	06:02P	8057815275	Host	152.00	7.60
Subtotal			286.00			14.30

Cuyama BDSAC Conference ID: 4658938

#	Date	Time	Other	Location	Mins	Amt
1	12/18/18	02:01P	8057815457	Host	378.00	18.90
2	12/18/18	02:03P	6617662369	Host	376.00	18.80
3	12/18/18	02:05P	4157938420	Host	88.00	4.40
4	12/18/18	03:34P	4157938420	Host	14.00	.70
5	12/18/18	03:49P	8054777139	Participant	2.00	.10
6	12/18/18	03:57P	4157938420	Host	18.00	.90
7	12/18/18	04:18P	4157938420	Host	9.00	.45
8	12/18/18	04:28P	4157938420	Host	7.00	.35
9	12/18/18	04:31P	6172725538	Participant	29.00	1.45
10	12/18/18	04:38P	6617472130	Host	66.00	3.30
11	12/18/18	04:46P	4157938420	Host	74.00	3.70
12	12/18/18	05:06P	8057815275	Host	193.00	9.65
13	12/18/18	05:11P	8053314650	Host	31.00	1.55
14	12/18/18	06:03P	6507590535	Participant	12.00	.60
15	12/18/18	06:18P	6507590535	Participant	37.00	1.85
16	12/18/18	06:55P	6507590535	Participant	81.00	4.05
17	12/18/18	07:13P	6617472130	Host	67.00	3.35
Subtotal			1,482.00			74.10

Cuyama BDSAC Conference ID: 4659461

#	Date	Time	Other	Location	Mins	Amt
1	12/18/18	08:29P	6507590535	Participant	1.00	.05
Subtotal			1.00			.05

Cuyama GSA Conference ID: 4646773

#	Date	Time	Other	Location	Mins	Amt
1	12/07/18	11:55A	9162338352	Host	88.00	4.40
2	12/07/18	11:59A	9169998777	Host	84.00	4.20
3	12/07/18	12:00P	6614773385	Host	3.00	.15
4	12/07/18	12:00P	9256274112	Host	52.00	2.60
5	12/07/18	12:01P	4157938420	Host	83.00	4.15

6	12/07/18	12:02P	6614773385	Host	81.00	4.05
7	12/07/18	12:04P	4155242290	Host	79.00	3.95
8	12/07/18	12:52P	9256274112	Host	32.00	1.60
Subtotal					502.00	25.10

Cuyama GSA Conference ID: 4651888

#	Date	Time	Other	Location	Mins	Amt
1	12/12/18	11:58A	6613337091	Host	17.00	.85
2	12/12/18	12:00P	6613302610	Host	30.00	1.50
3	12/12/18	12:00P	6614773385	Host	2.00	.10
4	12/12/18	12:00P	9256274112	Host	30.00	1.50
5	12/12/18	12:01P	6613321043	Host	29.00	1.45
6	12/12/18	12:02P	9258581340	Host	22.00	1.10
7	12/12/18	12:15P	6613337091	Host	15.00	.75
Subtotal					145.00	7.25

Cuyama GSA Conference ID: 4654117

#	Date	Time	Other	Location	Mins	Amt
1	12/13/18	03:57P	4159990316	Host	33.00	1.65
2	12/13/18	03:58P	6613337091	Host	90.00	4.50
3	12/13/18	03:58P	6614773385	Host	90.00	4.50
4	12/13/18	04:01P	9162338352	Host	87.00	4.35
5	12/13/18	04:03P	9169998777	Host	86.00	4.30
Subtotal					386.00	19.30

Cuyama GSA Conference ID: 4657348

#	Date	Time	Other	Location	Mins	Amt
1	12/17/18	04:30P	9169998707	Host	38.00	1.90
2	12/17/18	04:30P	9169998777	Host	6.00	.30
3	12/17/18	04:31P	6614773385	Host	4.00	.20
4	12/17/18	04:41P	6613337091	Host	1.00	.05
5	12/17/18	04:43P	6613337091	Host	25.00	1.25
6	12/17/18	04:44P	6614773385	Host	24.00	1.20
7	12/17/18	04:44P	9169998777	Host	24.00	1.20
8	12/17/18	04:46P	9169998780	Host	22.00	1.10
Subtotal					144.00	7.20

Cuyama GSA Conference ID: 4661038

#	Date	Time	Other	Location	Mins	Amt
1	12/19/18	03:57P	4157938420	Host	69.00	3.45
2	12/19/18	03:57P	6614773385	Host	69.00	3.45
3	12/19/18	03:59P	6613337091	Host	67.00	3.35
4	12/19/18	04:00P	4155242290	Host	65.00	3.25
5	12/19/18	04:01P	9169998777	Host	65.00	3.25
6	12/19/18	04:03P	9162338352	Host	62.00	3.10
7	12/19/18	04:05P	9256274112	Host	61.00	3.05
8	12/19/18	04:27P	9258581340	Host	4.00	.20
Subtotal					462.00	23.10

Cuyama GSA Conference ID: 4662190

#	Date	Time	Other	Location	Mins	Amt
1	12/20/18	12:56P	6614773385	Host	8.00	.40
2	12/20/18	12:58P	6613337091	Host	40.00	2.00
3	12/20/18	12:59P	8057222523	Host	2.00	.10
4	12/20/18	01:00P	8318182451	Host	38.00	1.90
5	12/20/18	01:01P	8057222523	Host	37.00	1.85
6	12/20/18	01:05P	6614773385	Host	9.00	.45
7	12/20/18	01:06P	6613302610	Host	32.00	1.60
8	12/20/18	01:13P	6613321043	Host	25.00	1.25
Subtotal					191.00	9.55

Cuyama GSA Conference ID: 4663082

#	Date	Time	Other	Location	Mins	Amt
1	12/21/18	09:22A	6613337091	Host	35.00	1.75
2	12/21/18	09:30A	6614773385	Host	37.00	1.85
3	12/21/18	09:30A	9258581340	Host	37.00	1.85
4	12/21/18	09:31A	9169998777	Host	36.00	1.80
Subtotal					145.00	7.25

Cuyama Charges:		
	3-Dec	\$14.30
	7-Dec	\$25.10
	12-Dec	\$7.25
	13-Dec	\$19.30
	17-Dec	\$7.20
	18-Dec	\$74.10
	18-Dec	\$0.05
	19-Dec	\$23.10
	20-Dec	\$9.55
	21-Dec	\$7.25
A	Cuyama Subtotal	\$187.20
B	Conf Line Charges	\$427.65
C	Fees	\$85.53
D	Fee Rate (C/B)	20%
E	Total Cuyama Charge (A*(1+D))	\$224.64





Project and Person Summary with Expense Detail

Date Range: 12/1/2018 - 12/31/2018

<i>Client</i>	<i>Project</i>	<i>Person</i>	<i>Expense Type</i>	<i>Date</i>	<i>Description</i>	<i>Mileage</i>	<i>Amount</i>
Cuyama Basin Water District							
	1708-CBWD	Cuyama Basin					\$468.00
		Taylor Blakslee					
			<i>Mileage</i>			248.00	\$135.16
				12/3/2018	Mileage to Cuyama from Bakersfield (RT)	124.00	\$67.58
				12/18/2018	Mileage to Cuyama from Bakersfield (RT)	124.00	\$67.58
			<i>Supplies</i>				\$108.20
				12/31/2018	Printing costs for Board packets, etc.		\$108.20
			<i>Telephone</i>				\$224.64
				12/31/2018	Conference line charges.		\$224.64
					Cuyama Basin Subtotal		\$468.00
					Cuyama Basin Water District Subtotal		\$468.00
					Grand Total		\$468.00



INVOICE

1901 Royal Oaks Drive
Suite 200
Sacramento, CA 95815

916 923.1500
hgcpm.com

To: Cuyama Basin GSA
c/o Jim Beck
4900 California Avenue, Ste B
Bakersfield, CA 93309

Please Remit To: **Hallmark Group**
1901 Royal Oaks Drive, Suite 200
Sacramento, CA 95815
P: (916) 923-1500

Invoice No.: 2018-CBWD-TO2-12A
Task Order: CB-HG-002
Date: January 23, 2019

For professional services rendered for the month of December 2018

Task Order	Sub task	Task Description	Billing Classification	Hours	Rate	Amount
CB-HG-002	1	Budget Development & Admin	Executive Director	0.00	\$ 250.00	\$ -
			Project Controls Manager	0.00	\$ 200.00	\$ -
			Project Admin	0.00	\$ 100.00	\$ -
			Total Task 1 Labor			
CB-HG-002	2	Financial Management	Executive Director	0.00	\$ 250.00	\$ -
			Project Controls Manager	3.75	\$ 200.00	\$ 750.00
			Project Admin	1.50	\$ 100.00	\$ 150.00
			Total Task 2 Labor			
CB-HG-002	3	Outreach Facilitation	Executive Director	0.00	\$ 250.00	\$ -
			Project Admin	6.25	\$ 100.00	\$ 625.00
			Total Task 3 Labor			
Total Labor						\$ 1,525.00
ODC - Travel						\$ -
SubTotal Other Direct Costs						\$ -
ODC Mark Up						5% \$ -
Total Other Direct Costs						\$ -
TOTAL AMOUNT DUE FOR THIS INVOICE						\$ 1,525.00

CB-HG-002	Original Totals	Amendment(s)	Total Committed	Previously Billed	Current Billing	Remaining Balance
Task 1	\$ 13,400.00	\$ -	\$ 13,400.00	\$ 8,575.00	\$ -	\$ 4,825.00
Task 2	\$ 28,400.00	\$ -	\$ 28,400.00	\$ 23,687.50	\$ 900.00	\$ 3,812.50
Task 3	\$ 32,100.00	\$ (18,450.00)	\$ 13,650.00	\$ 12,712.50	\$ 625.00	\$ 312.50
Travel & ODCs	\$ 2,820.00	\$ -	\$ 2,820.00	\$ -	\$ -	\$ 2,820.00
Total	\$ 76,720.00	\$ (18,450.00)	\$ 58,270.00	\$ 44,975.00	\$ 1,525.00	\$ 11,770.00

CUYAMA BASIN GROUNDWATER SUSTAINABILITY AGENCY

PROGRESS REPORT FOR TASK ORDER CB-HG-002

Client Name:	Cuyama Basin Groundwater Sustainability Agency	Agreement Number:	201709-CB-001
Company Name:	HGCPM, Inc. DBA The Hallmark Group	Address:	1901 Royal Oaks Drive, Suite 200 Sacramento, CA 95815
Task Order Number:	CB-HG-002	Report Period:	December 1-31, 2018
Progress Report Number:		Project Manager:	Jim Beck
Invoice Number:	2018-CBWD-TO2-12A	Invoice Date:	January 23, 2019

SUMMARY OF WORK PERFORMED

Task 1: Budget Development & Administration

- Nothing to report.

Task 2: Financial Management

- Drafted progress report for Hallmark services.
- Reviewed and processed accounts payable, invoicing, and bank account reconciliation.
- Prepared monthly financial statement.

Task 3: Outreach Facilitation

- Coordinated the update of the Cuyama Basin Groundwater Sustainability Agency (CBGSA) website with Board and Standing Advisory Committee minutes, agendas, GSP chapters, and GSP presentations.
- Updated CBGSA public stakeholder contact list.
- Discussed outreach update with CBGSA Program Management Team (PMT).

DELIVERABLES AND COMPLETED TASKS

- Drafted progress report for Hallmark services.
- Coordinated the update of the CBGSA website with minutes, agendas, GSP sections, and GSP presentations.

PLANNED OBJECTIVES FOR NEXT REPORTING PERIOD

- None. This task order has been consolidated with Task Order No. 1 to form Task Order No. 3 for the period January 1, 2019 to January 31, 2020.

**KLEIN, DENATALE, GOLDNER
COOPER, ROSENLIEB & KIMBALL, LLP**

301

4550 CALIFORNIA AVENUE
SECOND FLOOR
BAKERSFIELD, CA 93309

MAILING ADDRESS:
P.O. BOX 11172
BAKERSFIELD, CA 93389-1172
(661) 395-1000
FAX (661) 326-0418
E-MAIL accounting@kleinlaw.com

CUYAMA BASIN GROUNDWATER SUSTAINABILITY AGENCY
C/O HALLMARK GROUP
1901 ROYAL OAKS DRIVE, SUITE 200
SACRAMENTO, CA 95815

December 28, 2018
Bill No. 22930-001-139947
JDH

Statement for Period through December 19, 2018

Re: 22930 - CUYAMA BASIN GROUNDWATER SUSTAINABILITY AGENCY
001 GENERAL BUSINESS

Date		Services	Hours	Amount	
11/30/18	JDH	TELEPHONE CONFERENCE WITH J. BECK REGARDING PENDING MATTERS.	0.50	135.00	
12/03/18	JDH	ATTENDED DECEMBER SPECIAL JOINT BOARD MEETING; ATTENDED COMMUNITY WORKSHOP.	6.70	1,809.00	
12/14/18	DKK	OFFICE CONFERENCE WITH J. HUGHES; RESEARCHED BROWN ACT AND MEETING DEFINITIONS.	2.30	437.00	
12/17/18	JDH	E-MAILED J. EATON REGARDING FINAL FORM OF GRANT AGREEMENT.	0.20	54.00	
12/17/18	JLE	REVIEWED AND ANALYZED FINAL GRANT FUNDING AGREEMENT; PREPARED LENGTHY E-MAIL TO J. BECK AND T. BLAKSLEE REGARDING AGREEMENT; TELEPHONE CALL TO J. BECK AND T. BLAKSLEE; TELEPHONE CONFERENCE WITH J. BECK AND T. BLAKSLEE REGARDING AGREEMENT; TELEPHONE CONFERENCE WITH T. BLAKSLEE AND A. REGINA REGARDING AGREEMENT.	3.90	819.00	
12/17/18	DKK	DRAFTED MEMORANDUM ON BROWN ACT MEETINGS.	2.40	456.00	
12/18/18	JLE	PREPARED FOR SPECIAL BOARD MEETING; ATTENDED SPECIAL BOARD MEETING INCLUDING TRAVEL TO AND FROM NEW CUYAMA.	4.50	945.00	
			Rate	Hours	Amount
JLE	EATON, JACOB L.		210.00	8.40	1,764.00
JDH	HUGHES, JOSEPH		270.00	7.40	1,998.00
DKK	KEY, DARIEN		190.00	7.60	1,444.00

PAYMENT DUE UPON RECEIPT
PLEASE REFER TO BILL NUMBER LOCATED BENEATH STATEMENT DATE WHEN SUBMITTING PAYMENT
TO ENSURE PROPER CREDIT.
A FINANCE CHARGE OF 1 1/2% PER MONTH (18% ANNUALLY) WILL BE CHARGED ON ALL BALANCES OVER 30 DAYS.
FEDERAL I.D. NO. 95-2298220

**KLEIN, DENATALE, GOLDNER,
COOPER, ROSENLIEB & KIMBALL, LLP**

302

Bill No. 22930-001-139947
Client Ref: 22930 - 001

December 28, 2018

Page 2

Total Fees **\$5,206.00**

Costs and Expenses

Date	Expenses	Amount
12/07/18	TRAVEL EXPENSES 12/3 ROUND TRIP TRAVEL FOR DECEMBER BOARD MEETING - JOSEPH D. HUGHES	74.12
Total Costs and Expenses		<u>\$74.12</u>

Current Charges **\$5,280.12**

Prior Statement Balance 13,055.17

Payments/Adjustments Since Last Bill -0.00

Pay This Amount **\$18,335.29**

Any Payments Received After December 28, 2018 Will Appear on Your Next Statement

PAYMENT DUE UPON RECEIPT
PLEASE REFER TO BILL NUMBER LOCATED BENEATH STATEMENT DATE WHEN SUBMITTING PAYMENT
TO ENSURE PROPER CREDIT.
A FINANCE CHARGE OF 1 1/2% PER MONTH (18% ANNUALLY) WILL BE CHARGED ON ALL BALANCES OVER 30 DAYS.
FEDERAL I.D. NO. 95-2298220



COMMITMENT & INTEGRITY
DRIVE RESULTS

Remit to:
PO Box 55008
Boston, MA 02205-5008

T 800.426.4262
T 207.774.2112
F 207.774.6635

INVOICE
303

TD BANK
Electronic Transfer:
⑆211274450 ⑆2427662596⑆

Jim Beck
Executive Director
Cuyama Basin Groundwater Sustainability Agency
c/o Hallmark Group
1901 Royal Oaks Drive, Suite 200
Sacramento, CA 95815

January 24, 2019
Project No: 0011078.01
Invoice No: 159014

Project 0011078.01 CUYAMA GSP

Professional Services for the period ending December 28, 2018

Phase 002 Data Management System, Data Collection and Analysis, and Plan Review

Professional Personnel

	Hours	Rate	Amount	
Engineer 1				
Nguyen, John	1.00	157.00	157.00	
Planner 1				
De Anda, Vanessa	1.75	157.00	274.75	
Planner 2				
Eggleton, Charles	7.25	182.00	1,319.50	
Project Manager 2				
Ayres, John	14.00	258.00	3,612.00	
Van Lienden, Brian	1.00	258.00	258.00	
Senior Project Manager				
Long, Jeanna	1.50	274.00	411.00	
Totals	26.50		6,032.25	
Labor Total				6,032.25
				Total this Phase \$6,032.25

Phase 004 Basin Model and Water Budget

Professional Personnel

	Hours	Rate	Amount	
Engineer 2				
Ceyhan, Mahmut	88.50	182.00	16,107.00	
Project Manager 2				
Cayar, Mesut	2.50	258.00	645.00	
Senior Technical Practice Lead				
Taghavi, Ali	33.00	301.00	9,933.00	
Totals	124.00		26,685.00	
Labor Total				26,685.00
				Total this Phase \$26,685.00

Please include our invoice number in your remittance. Thank you.

Project	0011078.01	CUYAMA GSP	Invoice	159014
---------	------------	------------	---------	--------

Phase 007 Projects and Actions for Sustainability Goals

Professional Personnel

	Hours	Rate	Amount	
National Practice Lead Melton, Lyndel	16.50	315.00	5,197.50	
Planner 2 Eggleton, Charles	88.00	182.00	16,016.00	
Project Manager 2 Ayres, John	38.00	258.00	9,804.00	
Van Lienden, Brian	39.00	258.00	10,062.00	
Scientist 1 Valenzuela, George	16.25	157.00	2,551.25	
Totals	197.75		43,630.75	
Labor Total				43,630.75

Reimbursable

Vehicle Expenses 12/3/2018 Melton, Lyndel	Board Meeting and Workshop	65.32		
Travel & Lodging 12/3/2018 Melton, Lyndel	Board Meeting & Workshop	45.50		
12/3/2018 Melton, Lyndel	Board Meeting & Workshop	45.50		
Reimbursable Total	1.1 times	156.32	171.95	
	Total this Phase			\$43,802.70

Phase 010 Outreach, Education and Communication

Professional Personnel

	Hours	Rate	Amount	
Graphic Artist Fox, Adam	1.25	115.00	143.75	
Planner 1 De Anda, Vanessa	14.25	157.00	2,237.25	
Project Manager 2 Ayres, John	4.00	258.00	1,032.00	
Scientist 1 Valenzuela, George	6.00	157.00	942.00	
Totals	25.50		4,355.00	
Labor Total				4,355.00

Reimbursable

Vehicle Expenses				
12/3/2018	De Anda, Vanessa	Cuyama GSP stakeholder workshop	148.24	
12/5/2018	Eggleton, Charles	Travel to and from Cuyama	587.12	
Meals				
12/3/2018	De Anda, Vanessa	Cuyama GSP	13.65	
	Reimbursable Total	1.1 times	749.01	823.91
		Total this Phase		\$5,178.91

Phase 011 Project Management

Professional Personnel

	Hours	Rate	Amount	
National Practice Lead				
Melton, Lyndel	2.50	315.00	787.50	
Project Assistant				
Hughart, Desiree	.75	108.00	81.00	
Project Manager 2				
Van Lienden, Brian	3.00	258.00	774.00	
Senior Technical Practice Lead				
Lopezcalva, Enrique	.50	301.00	150.50	
Totals	6.75		1,793.00	
	Labor Total			1,793.00
		Total this Phase		\$1,793.00

Phase 012 GW Monitoring Well Network Expansion (Cat 1 – Task 1)

Professional Personnel

	Hours	Rate	Amount	
Project Manager 2				
Van Lienden, Brian	6.00	258.00	1,548.00	
Totals	6.00		1,548.00	
	Labor Total			1,548.00
		Total this Phase		\$1,548.00

Phase 013 Evapotranspiration Evaluation for Cuyama (Cat 1 – Task 2)

Professional Personnel

	Hours	Rate	Amount	
Project Manager 2				
Van Lienden, Brian	2.00	258.00	516.00	
Totals	2.00		516.00	
	Labor Total			516.00

Phase 014 Surface Water Monitoring Program (Cat 1 – Task 3)

Professional Personnel

	Hours	Rate	Amount	
Planner 2				
Eggleton, Charles	10.75	182.00	1,956.50	
Project Manager 2				
Van Lienden, Brian	20.00	258.00	5,160.00	
Totals	30.75		7,116.50	
Labor Total				7,116.50

Reimbursable

Vehicle Expenses			
11/7/2018	Eggleton, Charles	Travel to and from Cuyama	55.20
11/7/2018	Eggleton, Charles	Travel to and from Cuyama	48.07
11/8/2018	Eggleton, Charles	Travel to and from Cuyama	216.74
11/29/2018	Eggleton, Charles	Travel to and from Cuyama	37.57
11/30/2018	Eggleton, Charles	Travel to and from Cuyama	45.39
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	61.34
12/3/2018	Eggleton, Charles	Travel to and from Cuyama	51.23
12/4/2018	Eggleton, Charles	Travel to and from Cuyama	51.30
12/4/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	102.92
12/4/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	51.07
12/5/2018	Eggleton, Charles	Travel to and from Cuyama	41.99
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	51.36
12/19/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	46.13
12/19/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	141.42
Travel & Lodging			
11/7/2018	Eggleton, Charles	Travel to and from Cuyama	10.00
11/7/2018	Eggleton, Charles	Travel to and from Cuyama	103.84
11/8/2018	Eggleton, Charles	Travel to and from Cuyama	23.23
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	11.01
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	103.49
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	114.04
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	107.99
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	10.55

Project	0011078.01	CUYAMA GSP	Invoice	1590	307
12/5/2018	Eggleton, Charles	Travel to and from Cuyama	31.80		
12/5/2018	Eggleton, Charles	Travel to and from Cuyama	13.46		
12/17/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	103.49		
12/17/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	10.55		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	91.00		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	10.55		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	103.49		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	91.00		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	9.28		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	9.28		
Meals					
11/29/2018	Eggleton, Charles	Travel to and from Cuyama	81.89		
11/29/2018	Eggleton, Charles	Travel to and from Cuyama	28.63		
12/3/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	33.59		
12/3/2018	Eggleton, Charles	Travel to and from Cuyama	49.74		
12/3/2018	Eggleton, Charles	Travel to and from Cuyama	37.19		
12/4/2018	Van Lienden, Brian	Cuyama GSP Board meeting & workshop	19.23		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	29.86		
12/18/2018	Van Lienden, Brian	Cuyama GSP Board/SAC meeting	33.03		
	Reimbursable Total		1.1 times	2,272.94	2,500.23
Consultant					
Subcontractor Expense					
12/28/2018	The Catalyst Group, Inc.	Inv#372	5,183.72		
	Consultant Total		1.1 times	5,183.72	5,702.09
			Total this Phase		\$15,318.82

Phase 015 Project Management (Cat 1 – Task 4)

Professional Personnel

	Hours	Rate	Amount	
National Practice Lead				
Melton, Lyndel	.50	315.00	157.50	
Project Manager 2				
Van Lienden, Brian	3.00	258.00	774.00	
Totals	3.50		931.50	
Labor Total				931.50

Total this Phase **\$931.50**

Total this Invoice **\$101,806.18**

Outstanding Invoices

Number	Date	Balance
152397	7/19/2018	180,525.65
153619	8/23/2018	135,300.00
154409	9/19/2018	195,124.42
155666	10/23/2018	101,772.20
156545	11/14/2018	84,659.70
157849	12/19/2018	142,959.49
Total		840,341.46

	Current Fee	Previous Fee	Total
Project Summary	101,806.18	1,525,385.77	1,627,191.95

Approved by:  _____

Brian Van Lienden
Project Manager
Woodard & Curran

Project	0011078.01	CUYAMA GSP	Invoice	159014
---------	------------	------------	---------	--------

Billing Backup

Thursday, January 24, 2019

Woodard & Curran

Invoice 159014 Dated 1/24/2019

3:45:33 PM

Project	0011078.01	CUYAMA GSP
---------	------------	------------

Phase	002	Data Management System, Data Collection and Analysis, and Plan Review
-------	-----	---

Professional Personnel

			Hours	Rate	Amount
Engineer 1					
4891	Nguyen, John	12/7/2018	1.00	157.00	157.00
	- Excel GroundwaterTemplate				
Planner 1					
4536	De Anda, Vanessa	12/19/2018	.50	157.00	78.50
	DMS comment matrix				
4536	De Anda, Vanessa	12/20/2018	1.25	157.00	196.25
	DMS comment matrix				
Planner 2					
3564	Eggleton, Charles	12/17/2018	3.00	182.00	546.00
	edits/updates to OPTI Database				
3564	Eggleton, Charles	12/18/2018	1.00	182.00	182.00
	drafting of DMS login window and message				
3564	Eggleton, Charles	12/20/2018	1.75	182.00	318.50
	creation and final edits to OPTI log-in pop up window explanation and disclaimer				
3564	Eggleton, Charles	12/21/2018	1.50	182.00	273.00
	Review of CSD well metadata				
Project Manager 2					
4510	Ayres, John	12/11/2018	2.00	258.00	516.00
	Meetings				
4510	Ayres, John	12/13/2018	6.00	258.00	1,548.00
	Threshold Presentation				
4510	Ayres, John	12/14/2018	6.00	258.00	1,548.00
	Threshold Presentation				
4455	Van Lienden, Brian	12/21/2018	1.00	258.00	258.00
Senior Project Manager					
3499	Long, Jeanna	12/18/2018	.50	274.00	137.00
3499	Long, Jeanna	12/19/2018	.50	274.00	137.00
3499	Long, Jeanna	12/21/2018	.50	274.00	137.00
	Totals		26.50		6,032.25
	Labor Total				6,032.25
	Total this Phase				\$6,032.25

Phase	004	Basin Model and Water Budget
-------	-----	------------------------------

Project	0011078.01	CUYAMA GSP		Invoice	159014
Professional Personnel					
			Hours	Rate	Amount
	Engineer 2				
4707	Ceyhan, Mahmut	12/2/2018	1.00	182.00	182.00
	Updated public workshop presentation.				
4707	Ceyhan, Mahmut	12/3/2018	15.00	182.00	2,730.00
	Cuyama Public Workshop Meeting including travel to/from Cuyama				
4707	Ceyhan, Mahmut	12/5/2018	8.00	182.00	1,456.00
	GSP Coordination Meeting Look at landuse correlation with precipitation Small watershed calibration				
4707	Ceyhan, Mahmut	12/6/2018	4.00	182.00	728.00
	Develop future land use. Small watershed calibration.				
4707	Ceyhan, Mahmut	12/7/2018	6.00	182.00	1,092.00
	Develop future land use. Small watershed calibration.				
4707	Ceyhan, Mahmut	12/10/2018	6.00	182.00	1,092.00
	Model calibration				
4707	Ceyhan, Mahmut	12/11/2018	8.00	182.00	1,456.00
	Model calibration Revise post processing tools				
4707	Ceyhan, Mahmut	12/12/2018	8.00	182.00	1,456.00
	Model calibration Revise post-processing tools				
4707	Ceyhan, Mahmut	12/13/2018	4.00	182.00	728.00
	Check model results, water budgets Model calibration				
4707	Ceyhan, Mahmut	12/14/2018	5.50	182.00	1,001.00
	Discussion on the Model Geology Prepared slides for the Technical Forum Call Technical Forum Call				
4707	Ceyhan, Mahmut	12/17/2018	2.00	182.00	364.00
	Model calibration				
4707	Ceyhan, Mahmut	12/18/2018	1.00	182.00	182.00
	Model geology and stratigraphy update coordination				
4707	Ceyhan, Mahmut	12/20/2018	5.00	182.00	910.00
	Model geology update coordination Coordination meeting for Cuyama sustainability yield and projects Added geology and stratigraphy update to the model				
4707	Ceyhan, Mahmut	12/21/2018	7.00	182.00	1,274.00
	Added geology and stratigraphy update to the model Checked and Updated the Rating Tables Ran model				
4707	Ceyhan, Mahmut	12/26/2018	8.00	182.00	1,456.00
	Model calibration				
	Project Manager 2				
3500	Cayar, Mesut	12/6/2018	1.00	258.00	258.00
	Model calibratiob update and small watershed refinement. Baseline questions				

Project	0011078.01	CUYAMA GSP			Invoice	159014
3500	Cayar, Mesut	12/11/2018	1.00	258.00	258.00	
	Working stream flow calibration					
3500	Cayar, Mesut	12/26/2018	.50	258.00	129.00	
	PEST set-up and discussion					
	Senior Technical Practice Lead					
3497	Taghavi, Ali	12/3/2018	8.00	301.00	2,408.00	
	Cuyama Meeting					
3497	Taghavi, Ali	12/4/2018	4.00	301.00	1,204.00	
	Travel back					
3497	Taghavi, Ali	12/5/2018	2.00	301.00	602.00	
	Meeting and calib review					
3497	Taghavi, Ali	12/7/2018	1.00	301.00	301.00	
	Review calib					
3497	Taghavi, Ali	12/11/2018	2.00	301.00	602.00	
3497	Taghavi, Ali	12/12/2018	2.00	301.00	602.00	
3497	Taghavi, Ali	12/14/2018	4.00	301.00	1,204.00	
3497	Taghavi, Ali	12/18/2018	2.00	301.00	602.00	
3497	Taghavi, Ali	12/20/2018	2.00	301.00	602.00	
3497	Taghavi, Ali	12/24/2018	2.00	301.00	602.00	
3497	Taghavi, Ali	12/26/2018	2.00	301.00	602.00	
3497	Taghavi, Ali	12/27/2018	2.00	301.00	602.00	
	Totals		124.00		26,685.00	
	Labor Total					26,685.00
	Total this Phase					\$26,685.00

Phase 007 Projects and Actions for Sustainability Goals

Professional Personnel

			Hours	Rate	Amount
	National Practice Lead				
3451	Melton, Lyndel	12/3/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/3/2018	4.00	315.00	1,260.00
3451	Melton, Lyndel	12/3/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/3/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/5/2018	1.50	315.00	472.50
3451	Melton, Lyndel	12/7/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/10/2018	.50	315.00	157.50
3451	Melton, Lyndel	12/11/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/12/2018	2.00	315.00	630.00
3451	Melton, Lyndel	12/19/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/19/2018	.50	315.00	157.50
3451	Melton, Lyndel	12/20/2018	.50	315.00	157.50
3451	Melton, Lyndel	12/20/2018	1.00	315.00	315.00
3451	Melton, Lyndel	12/20/2018	.50	315.00	157.50
	Planner 2				
3564	Eggleton, Charles	12/6/2018	3.00	182.00	546.00
	Threshold calculations for threshold developments				

Please include our invoice number in your remittance. Thank you.

Project	0011078.01	CUYAMA GSP			Invoice	159014
3564	Eggleton, Charles	12/7/2018	7.25	182.00	1,319.50	
	Threshold calculations and table making					
3564	Eggleton, Charles	12/10/2018	10.50	182.00	1,911.00	
	Preparation and creation of hydrographs and figures for board meeting 12/18/2018					
3564	Eggleton, Charles	12/11/2018	9.25	182.00	1,683.50	
	Preparation and creation of hydrographs and figures for board meeting 12/18/2018					
3564	Eggleton, Charles	12/12/2018	8.00	182.00	1,456.00	
	Preparation and creation of hydrographs and figures for board meeting 12/18/2018					
3564	Eggleton, Charles	12/13/2018	4.00	182.00	728.00	
	Preparation and creation of hydrographs and figures for board meeting 12/18/2018					
3564	Eggleton, Charles	12/14/2018	2.50	182.00	455.00	
	Preparation and creation of hydrographs and figures for board meeting 12/18/2018					
	Tech Forum Call					
3564	Eggleton, Charles	12/17/2018	3.00	182.00	546.00	
	calculations for Thresholds using nearest well depth					
	Project meeting/call with Jim and Taylor					
	Meeting with John					
3564	Eggleton, Charles	12/18/2018	4.00	182.00	728.00	
	Final Calculations for thresholds calculations					
3564	Eggleton, Charles	12/18/2018	3.00	182.00	546.00	
	Edits to Monitoring network Sections and					
3564	Eggleton, Charles	12/19/2018	2.75	182.00	500.50	
	Edits to Monitoring Network Sections and Figures					
3564	Eggleton, Charles	12/19/2018	.50	182.00	91.00	
	review of GDE memo					
3564	Eggleton, Charles	12/19/2018	2.50	182.00	455.00	
	forestlands mapping of cuyama to determine total forestlands coverage					
3564	Eggleton, Charles	12/20/2018	5.25	182.00	955.50	
	review, and gis processing of GDE memorandum					
3564	Eggleton, Charles	12/21/2018	6.50	182.00	1,183.00	
	quickly creating final thresholds table based on Boards most recent directions.					
3564	Eggleton, Charles	12/26/2018	8.00	182.00	1,456.00	
	Threshold calculations and witing about methods utilized to calculate thresholds.					
3564	Eggleton, Charles	12/27/2018	8.00	182.00	1,456.00	
	Threshold calculations and witing about methods utilized to calculate thresholds.					
	Project Manager 2					
4510	Ayres, John	12/3/2018	4.00	258.00	1,032.00	
	thresholds presentation preparation					
4510	Ayres, John	12/4/2018	8.00	258.00	2,064.00	
	basin conditions					
4510	Ayres, John	12/5/2018	1.00	258.00	258.00	
	coordination call					

Please include our invoice number in your remittance. Thank you.

Project	0011078.01	CUYAMA GSP			Invoice	159014
4510	Ayres, John	12/7/2018	2.00	258.00	516.00	
	coordination call					
4510	Ayres, John	12/17/2018	8.00	258.00	2,064.00	
	Threshold development					
4510	Ayres, John	12/18/2018	8.00	258.00	2,064.00	
	Board meeting					
4510	Ayres, John	12/19/2018	4.00	258.00	1,032.00	
	Board meeting					
4510	Ayres, John	12/20/2018	2.00	258.00	516.00	
	Threshold followup, GDE evaluation					
4510	Ayres, John	12/21/2018	1.00	258.00	258.00	
	GDEs and thresholds					
4455	Van Lienden, Brian	12/4/2018	7.00	258.00	1,806.00	
	Projects characterization					
4455	Van Lienden, Brian	12/5/2018	5.00	258.00	1,290.00	
	Model development support					
4455	Van Lienden, Brian	12/11/2018	7.00	258.00	1,806.00	
4455	Van Lienden, Brian	12/12/2018	4.00	258.00	1,032.00	
4455	Van Lienden, Brian	12/14/2018	2.00	258.00	516.00	
4455	Van Lienden, Brian	12/17/2018	3.00	258.00	774.00	
4455	Van Lienden, Brian	12/17/2018	3.00	258.00	774.00	
4455	Van Lienden, Brian	12/19/2018	5.00	258.00	1,290.00	
4455	Van Lienden, Brian	12/20/2018	3.00	258.00	774.00	
	Scientist 1					
3556	Valenzuela, George	12/14/2018	3.50	157.00	549.50	
	Explaining morales upper and lower layer in the basin, node location that affects water model. Reclassifying nodes					
3556	Valenzuela, George	12/17/2018	3.00	157.00	471.00	
	cuyama upper and lower morales designation, marking locations. Review node marking with John					
3556	Valenzuela, George	12/18/2018	4.50	157.00	706.50	
	cuyama upper/lower morales shapefiles, north fork well designations with Sercan					
3556	Valenzuela, George	12/19/2018	.25	157.00	39.25	
	cuyama setting up meetign with john					
3556	Valenzuela, George	12/20/2018	5.00	157.00	785.00	
	changing well depths with sercan, revising morales layers					
	Totals		197.75		43,630.75	
	Labor Total					43,630.75
	Reimbursable					
	Vehicle Expenses					
EX	000000113624	12/3/2018			65.32	
	Travel & Lodging					
EX	000000113624	12/3/2018			45.50	
EX	000000113624	12/3/2018			45.50	
	Reimbursable Total			1.1 times	156.32	171.95

Project	0011078.01	CUYAMA GSP	Invoice	159014
			Total this Phase	\$43,802.70

Phase 010 Outreach, Education and Communication

Professional Personnel

			Hours	Rate	Amount
Graphic Artist					
3488	Fox, Adam	12/5/2018	.50	115.00	57.50
	website updates and additions (B. van Lienden)				
3488	Fox, Adam	12/10/2018	.25	115.00	28.75
	website updates (B. van Lienden)				
3488	Fox, Adam	12/14/2018	.25	115.00	28.75
	website updates (B. van Lienden)				
3488	Fox, Adam	12/19/2018	.25	115.00	28.75
	Website updates and additions (B. van Lienden)				
Planner 1					
4536	De Anda, Vanessa	12/3/2018	11.50	157.00	1,805.50
	Fix handout & ppt translations, print presentations, drive to and from Cuyama, Board meeting, stakeholder meeting				
4536	De Anda, Vanessa	12/17/2018	2.75	157.00	431.75
	Translate Board meeting presentation				
Project Manager 2					
4510	Ayres, John	12/3/2018	4.00	258.00	1,032.00
	board meeting				
Scientist 1					
3556	Valenzuela, George	12/10/2018	.75	157.00	117.75
	sac valley water year graphs, fixing y-axis on presentation				
3556	Valenzuela, George	12/12/2018	3.25	157.00	510.25
	cuyama charts changing bars				
3556	Valenzuela, George	12/13/2018	2.00	157.00	314.00
	cuyama well ppt revisions, reviewing lowest well depth, adding well location on map				
	Totals		25.50		4,355.00
	Labor Total				4,355.00

Reimbursable

Vehicle Expenses

EX 000000113713 12/3/2018 De Anda, Vanessa / Cuyama GSP stakeholder workshop 148.24

EX 000000113636 12/5/2018 Eggleton, Charles / Travel to and from Cuyama 587.12

Meals

EX 000000113713 12/3/2018 De Anda, Vanessa / Cuyama GSP 13.65

Reimbursable Total 1.1 times 749.01 823.91

Total this Phase \$5,178.91

Phase 011 Project Management

Project	0011078.01	CUYAMA GSP	Invoice	159014
---------	------------	------------	---------	--------

Professional Personnel

			Hours	Rate	Amount	
	National Practice Lead					
3451	Melton, Lyndel	12/3/2018	1.00	315.00	315.00	
3451	Melton, Lyndel	12/7/2018	.50	315.00	157.50	
3451	Melton, Lyndel	12/21/2018	1.00	315.00	315.00	
	Project Assistant					
3502	Hughart, Desiree	12/18/2018	.25	108.00	27.00	
	Project Support					
3502	Hughart, Desiree	12/19/2018	.50	108.00	54.00	
	Project Support					
	Project Manager 2					
4455	Van Lienden, Brian	12/6/2018	1.00	258.00	258.00	
	PM activities					
4455	Van Lienden, Brian	12/13/2018	1.00	258.00	258.00	
4455	Van Lienden, Brian	12/21/2018	1.00	258.00	258.00	
	Senior Technical Practice Lead					
3521	Lopezcalva, Enrique	12/7/2018	.50	301.00	150.50	
	Totals		6.75		1,793.00	
	Labor Total					1,793.00
				Total this Phase		\$1,793.00

Phase 012 GW Monitoring Well Network Expansion (Cat 1 – Task 1)

Professional Personnel

			Hours	Rate	Amount	
	Project Manager 2					
4455	Van Lienden, Brian	12/28/2018	6.00	258.00	1,548.00	
	Monitoring network section updates					
	Totals		6.00		1,548.00	
	Labor Total					1,548.00
				Total this Phase		\$1,548.00

Phase 013 Evapotranspiration Evaluation for Cuyama (Cat 1 – Task 2)

Professional Personnel

			Hours	Rate	Amount	
	Project Manager 2					
4455	Van Lienden, Brian	12/13/2018	2.00	258.00	516.00	
	Totals		2.00		516.00	
	Labor Total					516.00

Project	0011078.01	CUYAMA GSP	Invoice	159014
			Total this Phase	\$516.00

Phase 014 Surface Water Monitoring Program (Cat 1 – Task 3)

Professional Personnel

			Hours	Rate	Amount	
Planner 2						
3564	Eggleton, Charles	12/3/2018	4.00	182.00	728.00	
	Cuyama travel and Board Meeting and Public Workshop. Also includes travel					
3564	Eggleton, Charles	12/4/2018	4.00	182.00	728.00	
	Cuyama travel and Board Meeting and Public Workshop. Also includes travel					
3564	Eggleton, Charles	12/5/2018	2.75	182.00	500.50	
	dropping off and returning from rental car facility debrief meeting and communication strategy					
Project Manager 2						
4455	Van Lienden, Brian	12/3/2018	8.00	258.00	2,064.00	
	Board/Workshop					
4455	Van Lienden, Brian	12/13/2018	4.00	258.00	1,032.00	
4455	Van Lienden, Brian	12/18/2018	8.00	258.00	2,064.00	
	Totals		30.75		7,116.50	
	Labor Total					7,116.50

Consultant

Subcontractor Expense					
AP 539340	12/28/2018	The Catalyst Group, Inc. / Inv#372		5,183.72	
	Consultant Total		1.1 times	5,183.72	5,702.09

Reimbursable

Vehicle Expenses					
EX 000000113636	11/7/2018	Eggleton, Charles / Travel to and from Cuyama		55.20	
EX 000000113636	11/7/2018	Eggleton, Charles / Travel to and from Cuyama		48.07	
EX 000000113636	11/8/2018	Eggleton, Charles / Travel to and from Cuyama		216.74	
EX 000000113636	11/29/2018	Eggleton, Charles / Travel to and from Cuyama		37.57	
EX 000000113636	11/30/2018	Eggleton, Charles / Travel to and from Cuyama		45.39	
EX 000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop		61.34	
EX 000000113636	12/3/2018	Eggleton, Charles / Travel to and from Cuyama		51.23	
EX 000000113636	12/4/2018	Eggleton, Charles / Travel to and from Cuyama		51.30	
EX 000000113398	12/4/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop		102.92	
EX 000000113398	12/4/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop		51.07	
EX 000000113636	12/5/2018	Eggleton, Charles / Travel to and from Cuyama		41.99	
EX 000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting		51.36	
EX 000000113945	12/19/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting		46.13	

Project	0011078.01	CUYAMA GSP	Invoice	159014
EX	000000113945	12/19/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	141.42
Travel & Lodging				
EX	000000113636	11/7/2018	Eggleton, Charles / Travel to and from Cuyama	10.00
EX	000000113636	11/7/2018	Eggleton, Charles / Travel to and from Cuyama	103.84
EX	000000113636	11/8/2018	Eggleton, Charles / Travel to and from Cuyama	23.23
EX	000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	11.01
EX	000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	103.49
EX	000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	114.04
EX	000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	107.99
EX	000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	10.55
EX	000000113636	12/5/2018	Eggleton, Charles / Travel to and from Cuyama	31.80
EX	000000113636	12/5/2018	Eggleton, Charles / Travel to and from Cuyama	13.46
EX	000000113945	12/17/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	103.49
EX	000000113945	12/17/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	10.55
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	91.00
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	10.55
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	103.49
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	91.00
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	9.28
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	9.28
Meals				
EX	000000113636	11/29/2018	Eggleton, Charles / Travel to and from Cuyama	81.89
EX	000000113636	11/29/2018	Eggleton, Charles / Travel to and from Cuyama	28.63
EX	000000113398	12/3/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	33.59
EX	000000113636	12/3/2018	Eggleton, Charles / Travel to and from Cuyama	49.74
EX	000000113636	12/3/2018	Eggleton, Charles / Travel to and from Cuyama	37.19
EX	000000113398	12/4/2018	Van Lienden, Brian / Cuyama GSP Board meeting & workshop	19.23
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	29.86
EX	000000113945	12/18/2018	Van Lienden, Brian / Cuyama GSP Board/SAC meeting	33.03
Reimbursable Total			1.1 times	2,272.94
			Total this Phase	\$15,318.82

Project	0011078.01	CUYAMA GSP	Invoice	159014
Phase	015	Project Management (Cat 1 – Task 4)		

Professional Personnel

			Hours	Rate	Amount	
	National Practice Lead					
3451	Melton, Lyndel	12/19/2018	.50	315.00	157.50	
	Project Manager 2					
4455	Van Lienden, Brian	12/7/2018	1.00	258.00	258.00	
	PM call					
4455	Van Lienden, Brian	12/14/2018	1.00	258.00	258.00	
4455	Van Lienden, Brian	12/21/2018	1.00	258.00	258.00	
	Totals		3.50		931.50	
	Labor Total					931.50
				Total this Phase		\$931.50
				Total this Project		\$101,806.18
				Total this Report		\$101,806.18



Progress Report

Cuyama Basin Groundwater Sustainability Plan Development

Subject: December 2018 Progress Report

Jim Beck, Executive Director,

Prepared for: Cuyama Basin Groundwater Sustainability Agency (CBGSA)

Prepared by: Brian Van Lienden, Woodard & Curran

Reviewed by: Lyndel Melton, Woodard & Curran

Date: January 24, 2019

Project No.: 0011078.01

This progress report summarizes the work performed and project status for the period of December 1, 2018 through December 28, 2018 on the Cuyama Basin Groundwater Sustainability Plan Development project. The work associated with this invoice was performed in accordance with our Consulting Services Agreement dated December 6, 2017, and with Task Orders 2 and 3, issued by CBGSA on March 7, 2018 and Task Orders 4 and 5, issued by the CBGSA on June 6, 2018. Note that Task Order 1, issued by CBGSA on December 6, 2017, was 100% spent as of the March 2018 invoice.

The progress report contains the following sections:

1. Work Performed
2. Budget Status
3. Schedule Status
4. Outstanding Issues to be Coordinated

1 Work Performed

A summary of work performed on the project during the current reporting period is provided in Tables 1 and 2 below. Table 1 shows work performed under Task Orders 2 and 4, which include tasks identified in the forthcoming Category 2 grant from the California Department of Water Resources (DWR). Table 2 shows work performed under Task Orders 3 and 5, which includes tasks identified in the forthcoming Category 1 grant from DWR.

Table 1: Summary of Task/Deliverables Status for Category 2 Tasks (Task Orders 2 and 4)

Task	Work Completed During the Reporting Period	Work Scheduled for Next Period
Task 1: Initiate Work Plan for GSP and Stakeholder Engagement Strategy Development	<ul style="list-style-type: none"> Task 1 is completed; no work was undertaken on this task during this reporting period 	<ul style="list-style-type: none"> Task 1 is completed; no further work is anticipated
Task 2: Data Management System, Data Collection and Analysis, and Plan Review	<ul style="list-style-type: none"> Updated Data Management System (DMS) and DMS GSP section in response to comments 	<ul style="list-style-type: none"> Further update DMS data in response to comments Complete updates to draft Data Management System GSP section and submit to GSA Board or approval
Task 3: Description of the Plan Area, Hydrogeologic Conceptual Model, and Groundwater Conditions	<ul style="list-style-type: none"> The updated draft Groundwater Conditions GSP section was re-submitted to the GSA Board for approval 	<ul style="list-style-type: none"> Task 3 is completed; no further work is anticipated
Task 4: Basin Model and Water Budget	<ul style="list-style-type: none"> Continued calibration on Integrated Water Flow Model (IWFM) Present updated calibration and future conditions modeling results at Public Workshop and to Technical Forum 	<ul style="list-style-type: none"> Finalize IWFM historical calibration and develop historical water budget estimates
Task 5: Establish Basin Sustainability Criteria	<ul style="list-style-type: none"> Facilitate discussions on sustainability thresholds with Technical Forum, SAC and Board Developed draft sustainability approaches and numbers for consideration by GSA Board at December 18 meeting and updated numbers following Board direction given at the meeting 	<ul style="list-style-type: none"> Submit updated sustainability numbers to GSA Board for approval Develop draft GSP section on Sustainability
Task 6. Monitoring Networks	<ul style="list-style-type: none"> Updated draft Monitoring Networks GSP section in response to comments 	<ul style="list-style-type: none"> Submit revised Monitoring Networks GSP section to GSA Board for approval

Task	Work Completed During the Reporting Period	Work Scheduled for Next Period
Task 7: Projects and Actions for Sustainability Goals	<ul style="list-style-type: none"> Continued work to characterize and describe potential projects and actions. 	<ul style="list-style-type: none"> Develop presentation materials on projects and actions for consideration by Technical Forum, SAC and Board
Task 8. GSP Implementation	<ul style="list-style-type: none"> No work was completed on this task during this reporting period 	<ul style="list-style-type: none"> No work is anticipated during the next reporting period
Task 9. GSP Development	<ul style="list-style-type: none"> No work was completed on this task during this reporting period 	<ul style="list-style-type: none"> No work is anticipated during the next reporting period
Task 10: Education, Outreach and Communication	<ul style="list-style-type: none"> Participated in meetings with CBGSA Board and SAC 	<ul style="list-style-type: none"> Continued participation in meetings with CBGSA Board, SAC and local stakeholders
Task 11: Project Management	<ul style="list-style-type: none"> Ongoing project management activities 	<ul style="list-style-type: none"> Ongoing project management activities

Table 2: Summary of Task/Deliverables Status for Category 1 Tasks (Task Orders 3 and 5)

Task	Work Completed During the Reporting Period	Work Scheduled for Next Period
Task 12: Groundwater Monitoring Well Network Expansion	<ul style="list-style-type: none"> Participated in meetings with Technical Forum, SAC and Board to discuss issues related to monitoring programs Continued to work with GSA Ad-hoc committee to refine potential monitoring well locations for DWR technical support services 	<ul style="list-style-type: none"> Refinement of proposed monitoring well locations
Task 13: Evapotranspiration Evaluation for Cuyama Basin Region	<ul style="list-style-type: none"> Refinement of land use and METRIC ET estimates in Cuyama Basin model 	<ul style="list-style-type: none"> Continued refinement of land use and METRIC ET estimates in Cuyama Basin model
Task 14: Surface Water Monitoring Program	<ul style="list-style-type: none"> Participated in meetings with Technical Forum, SAC and Board to discuss issues related to monitoring programs 	<ul style="list-style-type: none"> Identification of surface water monitoring locations and gaps

Task	Work Completed During the Reporting Period	Work Scheduled for Next Period
Task 15: Category 1 Project Management	<ul style="list-style-type: none"> Ongoing project management activities 	<ul style="list-style-type: none"> Ongoing project management activities

2 Budget Status

Table 3 shows the percent spent for each task under Task Order 1. 100% of the available Task Order 1 budget has been expended (\$321,135.00 out of \$321,135).

Table 3: Budget Status for Task Order 1

Task	Total Budget	Spent Previously	Spent this Period	Total Spent to Date	Budget Remaining	% Spent to Date
1	\$ 35,768.00	\$ 35,755.53	\$ -	\$ 35,755.53	\$ 12.47	100%
2	\$ 61,413.00	\$ 61,413.00	\$ -	\$ 61,413.00	\$ -	100%
3	\$ 45,766.00	\$ 45,766.00	\$ -	\$ 45,766.00	\$ -	100%
4	\$ 110,724.00	\$ 110,724.00	\$ -	\$ 110,724.00	\$ -	100%
5	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
6	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
7	\$ 12,120.00	\$ 12,120.00	\$ -	\$ 12,120.00	\$ -	100%
8	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
9	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
10	\$ 45,420.00	\$ 45,432.47	\$ -	\$ 45,432.47	\$ (12.47)	100%
11	\$ 9,924.00	\$ 9,924.00	\$ -	\$ 9,924.00	\$ -	100%
Total	\$ 321,135.00	\$ 321,135.00	\$ -	\$ 321,135.00	\$ -	100%

Table 4 shows the percent spent for each task under Task Order 2. 100% of the available Task Order 2 budget has been expended (\$399,469.00 out of \$399,469).

Table 4: Budget Status for Task Order 2

Task	Total Budget	Spent Previously	Spent this Period	Total Spent to Date	Budget Remaining	% Spent to Date
1	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
2	\$ 48,457.00	\$ 48,458.00	\$ -	\$ 48,458.00	\$ (1.00)	100%
3	\$ 24,182.00	\$ 24,182.00	\$ -	\$ 24,182.00	\$ -	100%
4	\$ 103,880.00	\$ 103,880.00	\$ -	\$ 103,880.00	\$ -	100%
5	\$ 60,676.00	\$ 60,676.00	\$ -	\$ 60,676.00	\$ -	100%
6	\$ 65,256.00	\$ 65,255.00	\$ -	\$ 65,255.00	\$ 1.00	100%
7	\$ 36,402.00	\$ 36,402.00	\$ -	\$ 36,402.00	\$ -	100%
8	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
9	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
10	\$ 45,420.00	\$ 45,420.00	\$ -	\$ 45,420.00	\$ -	100%
11	\$ 15,196.00	\$ 15,196.00	\$ -	\$ 15,196.00	\$ -	100%
Total	\$ 399,469.00	\$ 399,469.00	\$ -	\$ 399,469.00	\$ -	100%

Table 5 shows the percent spent for each task under Task Order 3. 100% of the available Task Order 3 budget has been expended (\$188,238.00 out of \$188,238).

Table 5: Budget Status for Task Order 3

Task	Total Budget	Spent Previously	Spent this Period	Total Spent to Date	Budget Remaining	% Spent to Date
12	\$ 53,244.00	\$ 53,244.00	\$ -	\$ 53,244.00	\$ -	100%
13	\$ 69,706.00	\$ 69,706.00	\$ -	\$ 69,706.00	\$ -	100%
14	\$ 53,342.00	\$ 53,342.00	\$ -	\$ 53,342.00	\$ -	100%
15	\$ 11,946.00	\$ 11,946.00	\$ -	\$ 11,946.00	\$ -	100%
Total	\$ 188,238.00	\$ 188,238.00	\$ -	\$ 188,238.00	\$ -	100%

Table 6 shows the percent spent for each task under Task Order 4 as of December 28, 2018. 72% of the available Task Order 4 budget has been expended (\$547,631.68 out of \$764,396).

Table 6: Budget Status for Task Order 4

Task	Total Budget	Spent Previously	Spent this Period	Total Spent to Date	Budget Remaining	% Spent to Date
1	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
2	\$ 24,780.00	\$ 18,413.25	\$ 6,032.25	\$ 24,445.50	\$ 334.50	99%
3	\$ 26,912.00	\$ 26,894.00	\$ -	\$ 26,894.00	\$ 18.00	100%
4	\$ 280,196.00	\$ 243,280.26	\$ 26,685.00	\$ 269,965.26	\$ 10,230.74	96%
5	\$ 47,698.00	\$ 46,311.88	\$ -	\$ 46,311.88	\$ 1,386.12	97%
6	\$ -	\$ -	\$ -	\$ -	\$ -	n/a
7	\$ 117,010.00	\$ 53,051.00	\$ 43,802.70	\$ 96,853.70	\$ 20,156.30	83%
8	\$ 69,780.00	\$ -	\$ -	\$ -	\$ 69,780.00	n/a
9	\$ 91,132.00	\$ -	\$ -	\$ -	\$ 91,132.00	n/a
10	\$ 70,236.00	\$ 59,424.97	\$ 5,178.91	\$ 64,603.88	\$ 5,632.12	92%
11	\$ 36,652.00	\$ 16,764.46	\$ 1,793.00	\$ 18,557.46	\$ 18,094.54	51%
Total	\$ 764,396.00	\$ 464,139.82	\$ 83,491.86	\$ 547,631.68	\$ 216,764.32	72%

Table 7 shows the percent spent for each task under Task Order 5 as of December 28, 2018. 37% of the available Task Order 5 budget has been expended (\$170,718.28 out of \$459,886).

Table 7: Budget Status for Task Order 5

Task	Total Budget	Spent Previously	Spent this Period	Total Spent to Date	Budget Remaining	% Spent to Date
12	\$ 196,208.00	\$ 94,913.62	\$ 1,548.00	\$ 96,461.62	\$ 99,746.38	49%
13	\$ 24,950.00	\$ 21,397.51	\$ 516.00	\$ 21,913.51	\$ 3,036.49	88%
14	\$ 204,906.00	\$ 23,825.78	\$ 15,318.82	\$ 39,144.60	\$ 165,761.40	19%
15	\$ 33,822.00	\$ 12,267.05	\$ 931.50	\$ 13,198.55	\$ 20,623.45	39%
Total	\$ 459,886.00	\$ 152,403.96	\$ 18,314.32	\$ 170,718.28	\$ 289,167.72	37%

3 Schedule Status

The project is on schedule. Work authorized under Task Orders 1, 2 and 3 are complete.

4 Outstanding Issues to be Coordinated

There are no outstanding issues at this time.